


**Servicing and Maintenance of SAMSON Products**  
**Tightening torques · Lubricants · Tools**

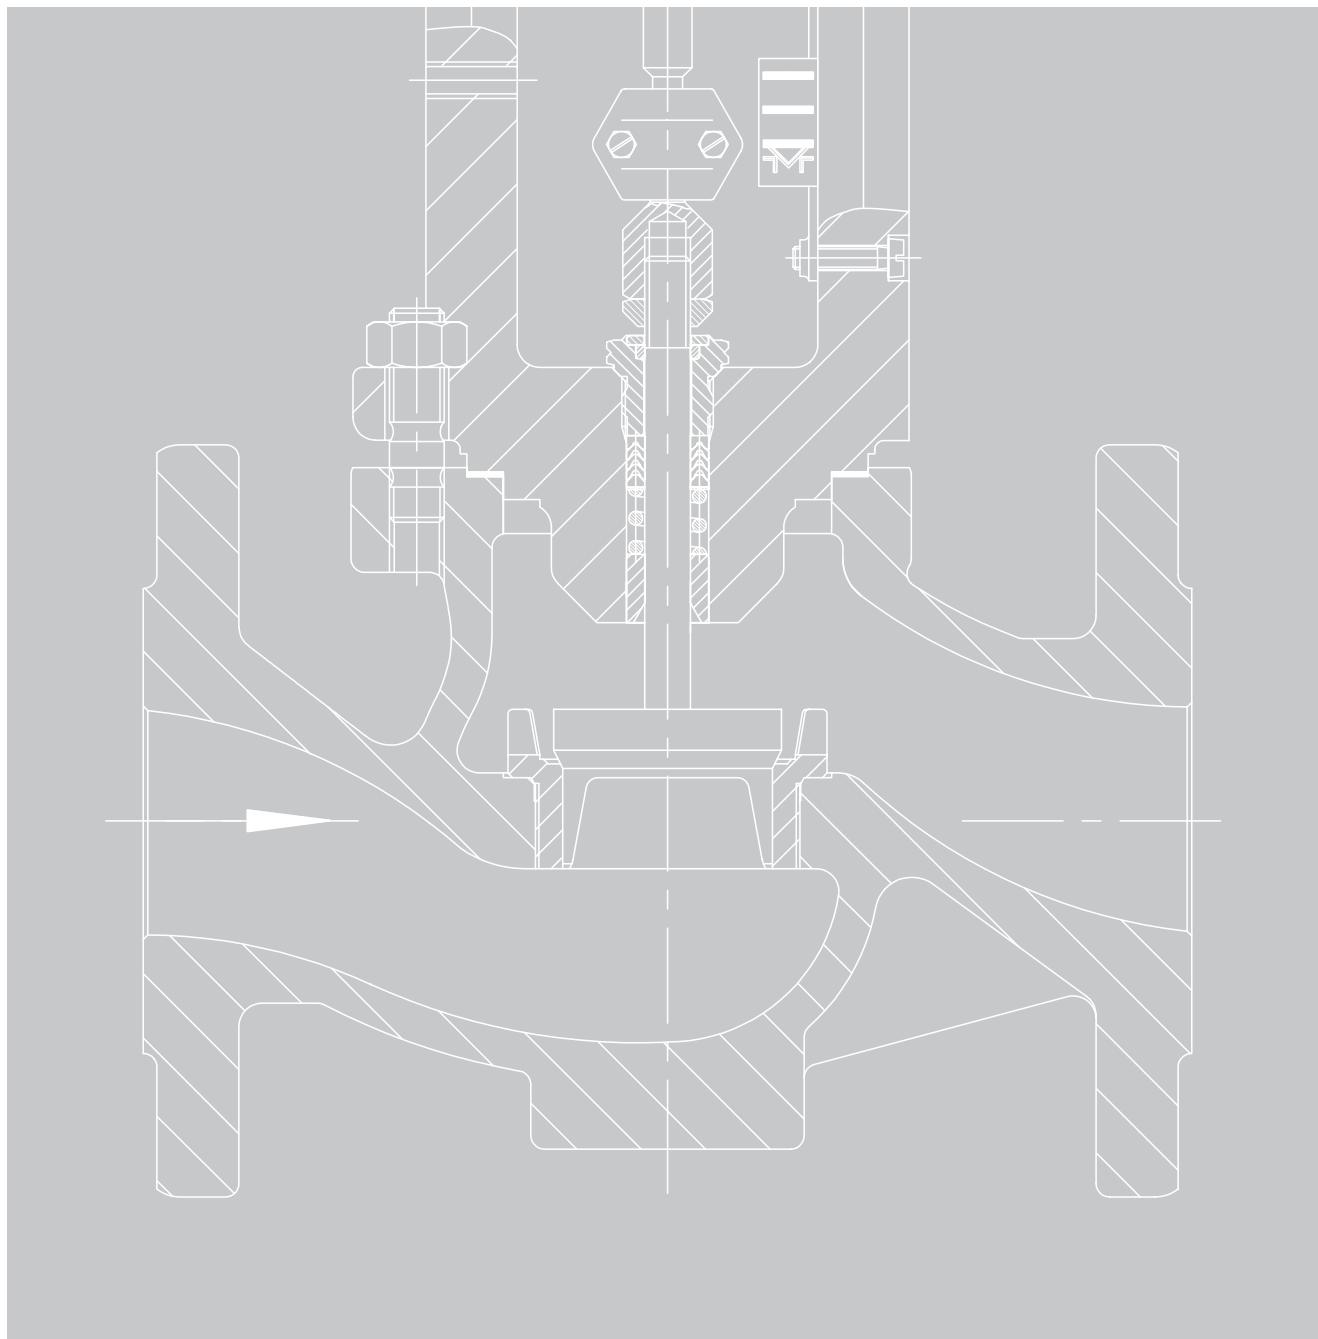

## Contents

### Information for All Valve Series and Types

1	Contact data of SAMSON's After-sales Service .....	1
2	Safety instructions and measures .....	1
3	Special tools for tightening torques .....	1
3.1	Torque wrench .....	1
3.2	Torque multiplier .....	2
3.3	Adapter .....	2
3.4	Pneumatic adapter .....	3
3.5	Hydraulic power tool.....	3
4	Width across flats.....	4

### Series 240 Valves

1	Information on Series 240 Valves.....	5
1.1	Technical data .....	5
1.2	Types of pressure balancing .....	5
1.3	Parts .....	6
2	Tightening torques.....	7
2.1	Tightening torques to install the seat .....	7
2.2	Tightening torques for connection of body and bonnet/flange .....	8
2.3	Tightening torques for plug stem connection in versions with insulating section or bellows seal .....	8
2.4	Tightening torques for screw plug at test connection .....	8
2.5	Tightening torques for nuts (bellows seal) .....	8
2.6	Tightening torques for connection of bonnet/flange with insulating section or bellows seal.....	8
2.7	Tightening torques for threaded bushing .....	8
2.8	Tightening torques for stem connector nut and lock nut.....	9
2.9	Tightening torques for stem connector clamps.....	9
3	Lubricant.....	10
3.1	Recommended lubricant .....	10
3.2	Lubricant for adjustable packings .....	10
3.3	Lubricant sorted by parts and versions .....	11
4	Tools.....	12
4.1	Pliers for assembly and disassembly .....	12
4.2	Packing extractor .....	12
4.3	Tool for high-temperature packings.....	12

### Type 3241 Valve

1	Information on Type 3241 Valve .....	13
1.1	Technical data .....	13
1.2	Note on different seat wrenches for Type 3241 (DN 250/NPS 10) .....	13
1.3	Parts .....	14
2	Tools.....	14
2.1	Tools for standard version .....	14
2.1.1	Seat wrenches .....	14
2.1.2	Packing tools .....	15

2.2	Tools for version with insulating section or bellows seal .....	15
2.3	Tools for version with pressure balancing .....	16
2.4	Tools for PSA valves .....	16
2.5	Tools for valves with AC trims.....	17
2.6	Lifting equipment .....	18

## Type 3244 Valve

1	<b>Information on Type 3244 Valve .....</b>	<b>19</b>
1.1	Technical data .....	19
1.2	Parts .....	19
2	<b>Tightening torques.....</b>	<b>19</b>
2.1	Tightening torques for screws to mount the plug in diverting valves .....	19
2.2	Other tightening torques.....	19
3	<b>Tools.....</b>	<b>20</b>
3.1	Tools for standard version .....	20
3.1.1	Seat wrenches .....	20
3.1.2	Packing tools .....	21
3.2	Tools for version with insulating section or bellows seal .....	21
3.3	Tools for mixing valves with insulating section or bellows seal .....	22
3.4	Tools for PSA valves .....	22

## Type 3248 and Type 3246 Valves

1	<b>Information on Type 3248 and Type 3246 Valves .....</b>	<b>23</b>
1.1	Technical data for Type 3248.....	23
1.2	Note on special versions of Type 3248 .....	23
1.3	Technical data for Type 3246.....	24
1.4	Note on versions of Type 3246 .....	24
1.5	Note on the use in air separation units (Type 3246 and Type 3248).....	25
1.6	Parts .....	25
2	<b>Tightening torques.....</b>	<b>28</b>
2.1	Tightening torques for Type 3248 (DN 15 to 150/NPS ½ to 6) .....	28
2.1.1	Tightening torques to install the seat .....	28
2.1.2	Tightening torques for nuts on body and bellows seal.....	28
2.1.3	Tightening torques for bolts on flange .....	28
2.1.4	Tightening torques for plug stem connection .....	28
2.1.5	Tightening torques for spacer stem .....	29
2.1.6	Tightening torques for nuts on guide bushing (bellows).....	29
2.1.7	Tightening torques for screw plug at test connection .....	29
2.1.8	Tightening torques for nuts (bellows seal) .....	29
2.1.9	Tightening torques for nuts on bellows seal and bonnet/flange .....	29
2.1.10	Tightening torques for threaded bushing .....	30
2.1.11	Tightening torques for stem connector nut and lock nut.....	30
2.2	Tightening torques for Type 3248 (DN 10/NPS ½, micro-flow valve).....	30
2.3	Tightening torques for Type 3248 in DN 25 to 150, aluminum angle valve (Linde version).....	31
2.3.1	Tightening torques to install the seat .....	31
2.3.2	Tightening torques for nuts on body and bellows seal.....	31
2.3.3	Tightening torques for plug stem connection .....	31
2.3.4	Tightening torques for spacer stem .....	31
2.3.5	Tightening torques for nuts on guide bushing .....	31

2.3.6	Tightening torques for screw plug at test connection .....	32
2.3.7	Tightening torques for nuts (bellows seal) .....	32
2.3.8	Tightening torques for nuts on bellows seal and bonnet/flange .....	32
2.3.9	Tightening torques for threaded bushing .....	32
2.3.10	Tightening torques for stem connector nut and lock nut.....	32
<b>3</b>	<b>Tools.....</b>	<b>33</b>
3.1	Tool sets .....	33
3.2	Extensions .....	33
3.2.1	Extensions for the standard version.....	34
3.2.2	Extensions for Linde version .....	34
3.3	Further tools for standard version .....	35
3.4	Further tools for Linde and Messer versions .....	35
3.5	Additional clamping elements .....	36

## **Series 250 and 280 Valves**

<b>1</b>	<b>Information on Series 250 and 280 Valves.....</b>	<b>37</b>
1.1	Technical data of Series 250 Valves.....	37
1.2	Technical data of Series 280 Valves.....	37
1.3	Types of pressure balancing .....	37
1.4	Note on specifications .....	37
1.5	Parts .....	38
<b>2</b>	<b>Tightening torques.....</b>	<b>39</b>
2.1	Tightening torques to install the seat .....	39
2.2	Tightening torques for connection of body and bonnet .....	40
2.2.1	Metal body gasket · All body materials .....	40
2.2.2	Body gasket: cam-profile gasket · All body material except 2.4360/B164 N04400 .....	42
2.2.3	Body gasket: cam-profile gasket · Body material 2.4360/B164 N04400 only .....	43
2.2.4	Body gasket: cam-profile gasket · All body material · Bolts with Xylan® coating.....	45
2.3	Tightening torques for connection of bellows seal and bellows seal bonnet .....	47
2.3.1	All body materials.....	47
2.3.2	Special version with large plug stem .....	47
<b>3</b>	<b>Lubricant.....</b>	<b>48</b>
3.1	Recommended lubricant .....	48
3.2	Lubricant for adjustable packings .....	48
3.3	Lubricant sorted by parts and versions .....	49
<b>4</b>	<b>Tools.....</b>	<b>50</b>
4.1	Tools for assembly and disassembly .....	50
4.2	Lifting equipment .....	51

## **Type 3251 and Type 3256**

<b>1</b>	<b>Information on Type 3251 and Type 3256 Valves .....</b>	<b>53</b>
1.1	Technical data for Type 3251 .....	53
1.2	Technical data for Type 3256.....	53
1.3	Parts .....	53
<b>2</b>	<b>Tools.....</b>	<b>54</b>
2.1	Tools for standard version .....	54
2.1.1	Seat wrenches .....	54
2.1.2	Tools for guide bushing .....	55

2.2	Tools for version with insulating section or bellows seal .....	56
2.2.1	Tools for guide bushing .....	56
2.3	Tools for version with pressure balancing .....	57
2.4	Tools for PSA valves .....	58
2.4.1	Tools for guide bushing .....	58
2.5	Tools for valves with AC trims.....	58
2.5.1	Seat wrenches for AC trims.....	58
2.5.2	Socket for AC trims .....	59

## Type 3281 and Type 3286 Steam Conditioning Valves

1	<b>Information on Type 3281 and Type 3286 Valves .....</b>	<b>61</b>
1.1	Technical data for Type 3281 .....	61
1.2	Technical data for Type 3286.....	61
1.3	Parts .....	61
2	<b>Tools.....</b>	<b>62</b>
2.1	Seat wrenches .....	62

## Series V2001

### Type 3321

1	<b>Information on Type 3321 Valve .....</b>	<b>65</b>
1.1	Technical data .....	65
1.2	Parts .....	66
2	<b>Tightening torques.....</b>	<b>67</b>
2.1	Tightening torques to install the seat .....	67
2.2	Tightening torques for connection of body and bonnet .....	67
2.3	Tightening torques for threaded bushing .....	68
2.4	Tightening torques for central nuts .....	68
3	<b>Lubricant.....</b>	<b>68</b>
3.1	Recommended lubricant .....	68
3.2	Lubricant sorted by parts and versions.....	68
4	<b>Tools.....</b>	<b>69</b>
4.1	Seat wrenches .....	69
4.2	Packing extractor .....	69

### Type 3510 Micro-flow Valve

1	<b>Information on Type 3510 Valve .....</b>	<b>71</b>
1.1	Technical data .....	71
1.2	Note on replacing the trim .....	71
1.3	Parts .....	72
2	<b>Tightening torques.....</b>	<b>73</b>
2.1	Tightening torques to install the seat .....	73
2.2	Tightening torques for threaded bushing .....	73
2.3	Tightening torques for intermediate piece.....	73
2.4	Tightening torques for bottom slotted nut .....	73
2.5	Tightening torques for top slotted nut (ring nut).....	73
2.6	Tightening torques for hex nuts on the tip of the plug stem.....	73

2.7	Tightening torques for bellows.....	74
2.8	Tightening torques for bellows seal/insulating section on the body.....	74
<b>3</b>	<b>Lubricant.....</b>	<b>75</b>
3.1	Recommended lubricant .....	75
3.2	Lubricant sorted by parts .....	75
<b>4</b>	<b>Tools.....</b>	<b>76</b>
4.1	Tool sets .....	76

## Type 3349 Valve

<b>1</b>	<b>Information on Type 3349 Valve .....</b>	<b>77</b>
1.1	Technical data .....	77
1.2	Note on Type 3349 .....	77
1.3	Note on actuators .....	77
1.4	Parts .....	78
<b>2</b>	<b>Tightening torques.....</b>	<b>79</b>
2.1	Tightening torques for Type 3349 with Type 3271 or Type 3277 Actuator .....	79
2.1.1	Tightening torques for connection of plug and plug stem .....	79
2.1.2	Tightening torques for connection of body and valve bonnet.....	79
2.2	Tightening torques for Type 3349 with Type 3379 Actuator .....	79
2.2.1	Tightening torques for connection of plug and plug stem .....	79
2.2.2	Tightening torques for connection of body and valve bonnet.....	80
2.2.3	Tightening torques for connection of actuator stem and plug stem .....	80
<b>3</b>	<b>Lubricant.....</b>	<b>80</b>
3.1	Recommended lubricant .....	80
3.2	Lubricant sorted by parts and versions.....	80
<b>4</b>	<b>Tools.....</b>	<b>81</b>

## Types 3271 and 3277 Pneumatic Actuators

<b>1</b>	<b>Information on Type 3271 and Type 3277 Actuators.....</b>	<b>83</b>
1.1	Technical data for Type 3271 .....	83
1.2	Technical data for Type 3277 .....	83
1.3	Note on actuators with preloaded springs.....	83
1.4	Parts .....	84
<b>2</b>	<b>Tightening torques.....</b>	<b>85</b>
2.1	Tightening torques for nuts to connect the top and bottom diaphragm cases.....	85
2.2	Tightening torques for nuts to connect the top and bottom diaphragm cases when the actuator springs are compressed 85	
2.3	Tightening torques for ring nut .....	85
2.4	Tightening torques for collar nut .....	86
2.5	Tightening torques for retaining nut .....	86
2.6	Tightening torques for nut on compressor .....	86
2.7	Tightening torques for adjustable clamp.....	86
2.8	Tightening torques for rod of anti-rotation fixture .....	87
2.9	Tightening torques for stem connector clamps.....	87
<b>3</b>	<b>Lubricant.....</b>	<b>88</b>
3.1	Recommended lubricant .....	88
3.2	Lubricant sorted by parts and versions.....	88

3.3	Sealant .....	89
<b>4</b>	<b>Tools.....</b>	<b>89</b>
4.1	Type 3271 and Type 3277, 60 to 120 cm <sup>2</sup> actuator areas .....	89
4.2	Type 3271 and Type 3277, 175 cm <sup>2</sup> actuator area .....	89
4.3	Type 3271 and Type 3277, 240 cm <sup>2</sup> actuator area .....	90
4.4	Type 3271 and Type 3277, 350 and 355 cm <sup>2</sup> actuator areas .....	90
4.5	Type 3271 and Type 3277, 700 and 750 cm <sup>2</sup> actuator areas .....	91
4.6	Type 3271, 1000 cm <sup>2</sup> actuator area.....	92
4.7	Type 3271, 1400 cm <sup>2</sup> actuator area.....	93
4.8	Type 3271, 2800 and 2 x 2800 cm <sup>2</sup> actuator areas .....	94

## **Types 3371 and 3372 Pneumatic Actuators**

<b>1</b>	<b>Information on Type 3371 and Type 3372 Actuators.....</b>	<b>95</b>
1.1	Technical data for Type 3371 .....	95
1.2	Technical data for Type 3372.....	95
1.3	Note on versions of Type 3372 .....	95
1.4	Note on actuators with preloaded springs.....	95
1.5	Parts .....	96
<b>2</b>	<b>Tightening torques.....</b>	<b>98</b>
2.1	Tightening torques for nuts to connect the top and bottom diaphragm cases.....	98
2.2	Tightening torques for screws on rods .....	98
2.3	Tightening torques for collar nut .....	98
2.4	Tightening torques for stem connector clamps.....	98
<b>3</b>	<b>Lubricant.....</b>	<b>99</b>
3.1	Recommended lubricant .....	99
3.2	Lubricant sorted by parts and versions.....	99
<b>4</b>	<b>Tools.....</b>	<b>100</b>
4.1	Type 3371 and Type 3372, 120 cm <sup>2</sup> actuator area .....	100
4.2	Type 3371 and Type 3372, 350 cm <sup>2</sup> actuator area .....	100

## **Type 3275 Pneumatic Piston Actuator**

<b>1</b>	<b>Information on Type 3275 Valve .....</b>	<b>103</b>
1.1	Technical data .....	103
1.2	Parts .....	103
<b>2</b>	<b>Tightening torques.....</b>	<b>104</b>
2.1	Tightening torques for tie rods .....	104
2.2	Tightening torques for collar nuts.....	104
<b>3</b>	<b>Lubricants .....</b>	<b>104</b>
<b>4</b>	<b>Tools.....</b>	<b>104</b>

## **Type 3571 Actuator**

<b>1</b>	<b>Information on Type 3571 Valve .....</b>	<b>105</b>
1.1	Technical data .....	105
1.2	Note on actuators with preloaded springs.....	105
1.3	Parts .....	105
<b>2</b>	<b>Tightening torques.....</b>	<b>108</b>

2.1	Tightening torques for nuts to connect the top and bottom diaphragm cases.....	108
2.2	Tightening torques for ring nut .....	108
2.3	Tightening torques for collar nut .....	108
2.4	Tightening torques for nut on compressor .....	108
2.5	Tightening torques for adjustable clamp.....	109
2.6	Tightening torques for stem connector clamps.....	109
<b>3</b>	<b>Lubricant.....</b>	<b>110</b>
3.1	Recommended lubricant .....	110
3.2	Lubricant sorted by parts and versions.....	110
<b>4</b>	<b>Tools.....</b>	<b>111</b>
4.1	Type 3571, 27 in <sup>2</sup> or 175 cm <sup>2</sup> actuator area.....	111
4.2	Type 3571, 54 in <sup>2</sup> or 350 cm <sup>2</sup> actuator area.....	111
4.3	Type 3571, 116 in <sup>2</sup> or 750 cm <sup>2</sup> actuator area.....	112

## 1 Contact data of SAMSON's After-sales Service

If you have any questions concerning this document or on how to handle SAMSON valves and tools correctly, you can contact us as follows:

- Send an e-mail to SAMSON's After-sales Service department ([aftersalesservice@samson.de](mailto:aftersalesservice@samson.de))
- Call the after-sales service at your nearest SAMSON subsidiary or office. All addresses are available at [www.samson.de](http://www.samson.de).

## 2 Safety instructions and measures

### WARNING

*Damage to health after contact with hazardous substances.*

*Certain lubricants (e.g. 8150-4008) are classified as hazardous substances. These substances have a special label and a material safety data sheet (MSDS) issued by the manufacturer.*

- Make sure that an MSDS is available for any hazardous substance used. If necessary, contact the manufacturer to obtain an MSDS.*
- Inform operating personnel about the hazardous substances and their correct handling.*


## 3 Special tools for tightening torques

Special tools are required to assemble and remove some parts. Use adjustable torque wrenches with a stop signal or that indicate the torque being applied to achieve the right tightening torques.

Valves in large nominal sizes often require tightening torques that can only be achieved through additional torque multiplication by using a torque multiplier or hydraulic power tool.

### 3.1 Torque wrench

Torque wrenches are available from SAMSON.

Size/Nm	Tool	Connections		Item no.	Photo
2 to 10 Nm	Torque wrench with scale	1/4"	<input checked="" type="checkbox"/>	9932-3811	
	1/4" extension			9932-3228	
	1/4" socket			9932-3302	
10 to 120 Nm	Torque wrench	1/2"	<input checked="" type="checkbox"/>	9932-3812	
60 to 320 Nm	Torque wrench	1/2"	<input checked="" type="checkbox"/>	9932-3814	
100 to 550 Nm	Torque wrench	3/4"	<input checked="" type="checkbox"/>	9932-2237	
5 to 60 Nm	Interchangeable head torque wrench	9x12 mm	<input type="checkbox"/>	9932-2269	
20 to 120 Nm	Interchangeable head torque wrench	14x18 mm	<input type="checkbox"/>	9932-2268	
60 to 320 Nm	Interchangeable head torque wrench	14x18 mm	<input type="checkbox"/>	9932-2238	

### 3.2 Torque multiplier

Gear-driven wrenches are available from SAMSON.

Valve size	Tool	Connections	Item no.	Fig.
<b>Series 240:</b> DN 32 to 150/ NPS 1 1/4 to 6	Torque multiplier SX30: - Transmission ratio 1:12.5 - Max. 3000 Nm - Accessories	Input 1/2" <input type="checkbox"/> Output 1" <input checked="" type="checkbox"/>	9932-3808	
	Spare shear pin	-		
<b>Series 250:</b> Up to DN 100/NPS 4			9932-3288	
<b>Series 250:</b> DN 125 and 150	Torque multiplier KWN8000 - Transmission ratio 1:40 - Max. 8000 Nm	Input 3/4" <input type="checkbox"/> Output 1 1/2" <input checked="" type="checkbox"/>	9932-3802	
	Torque multiplier BOLTMX MX80 - Transmission ratio 1:49 - Max. 8000 Nm	-		
	Spare shear pin for KWN8000 (labeled "140")	-	9932-3222	-
	Spare shear pin for BOLTMX MX80 (labeled "11K")	-	9932-3809	-
	Additional support for torque multiplier KWN8000	-		

#### i Note

Both the torque multipliers KWN8000 and BOLTMX MX80 have the same item number. However, they have different gear ratios and spare shear pins. Therefore, always check which torque multiplier you are using.

### 3.3 Adapter

Designation	Connections		Item no.	Fig.
	<input type="checkbox"/>	<input checked="" type="checkbox"/>		
Adapter	1	1 1/2	9532-0001	
Adapter	3/4	1/2	9532-0011	
Adapter	3/4	1	9932-2236	
Adapter	1/2	1	9932-2506	
Adapter	1 1/2	1	9932-2291	
Adapter	1/2	5/8	9932-3237	

### 3.4 Pneumatic adapter

Designation	Connection	Item no.	Photo
Pneumatic adapter (short)	G 1/8	1280-4015	
	G 1/4	1280-4017	
	G 3/8	1280-4019	
	G 1/2	1280-4021	
	G 3/4	1280-4023	
	G 1	1280-4025	
Pneumatic adapter (standard)	G 1/8	1280-4014	
	G 1/4	1280-4016	
	G 3/8	1280-4018 1280-4038	
	G 1/2	1280-4020	
	G 3/4	1280-4022 1280-4039	
	G 1	1280-4024	

### 3.5 Hydraulic power tool

DN	NPS	Tool	Item no.	Photo
200 to 500	8 to 20	Hydraulic power tool	1280-1010	 

Parts:

- Hydraulic pump with continuously adjustable output pressure (0 to 800 bar) and adapted output pressure gauge (scale in bar and Nm)
- Transport-proof, lockable hydraulic tank mounted in a frame
- Accessories

Special features:

- Power supply 230 V, 50/60 Hz
- Ratchet head capacity: 5000 Nm
- Maximum torque of torque wrench: 5000 Nm

## 4 Width across flats

DIN	
Thread	Width across flats (SW) in mm
M4	7
M5	8
M5 to 6	9
M6	10
M7	11
M8	13 (14)
M10	16 (17)
M12	18 (19)
M14	21 (22)
M16	24
M18	27
M20	30
M22	32 (34)
M24	36
M27	41
M30	46
M33	50
M36	55
M39	60
M42	65
M45	70
M48	75
M52	80
M56	85
M60	90

ANSI	
Thread	Width across flats (SW) in inches (hex nut)
1/4"-20UNC	7/16
5/8"-11UNC	15/16
3/4"-10UNC	1 1/8
7/8"-9UNC	1 5/16
1"-8UNC	1 1/2
1 1/8"-7UNC	1 11/16
1 1/4"-7UNC	1 7/8
1 3/8"-6UNC	2 3/16
1 1/2"-6UNC	2 1/4
Width across flats (SW) in inches (heavy hex nut)	
Thread	Width across flats (SW) in inches (heavy hex nut)
1 3/4"-5UNC	2 3/4
2"-4.5UNC	3 1/8
2 1/4"-4.5UNC	3 1/2
2 1/2"-4UNC	3 7/8
2 3/4"-4UNC	4 1/4

---

## 1 Information on Series 240 Valves


### 1.1 Technical data

		Series 240
Valve size	DIN	DN 15 to 300
	ANSI	NPS ½ to 12
Pressure rating	DIN	Up to PN 40
	ANSI	Up to Class 300

### 1.2 Types of pressure balancing

SAMSON valves have different types of pressure balancing. The parts subject to wear and spare parts for the various types of pressure balancing are not interchangeable. Therefore, it is important to always specify the valve's configuration ID or the SAMSON order number (including position within the order) when ordering spare parts, for repairs and after-sales inquiries. These data include information on which type of pressure balancing is used in the valve.

### 1.3 Parts

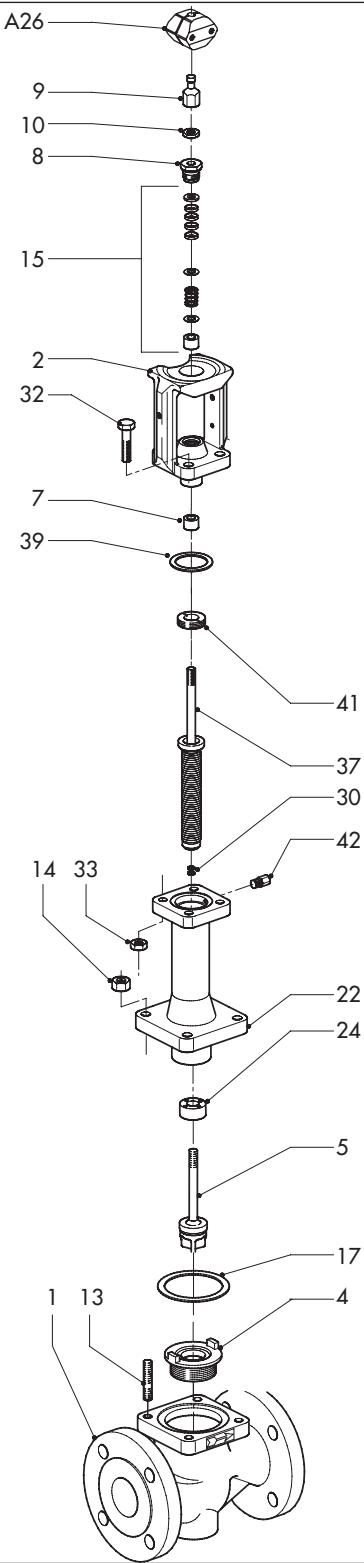

- |    |                        |     |                                  |
|----|------------------------|-----|----------------------------------|
| 1  | Body                   | 24  | Guide bushing<br>(bellows)       |
| 2  | Bonnet/flange          | 30  | Retaining washer                 |
| 4  | Seat                   | 32  | Bolt (bellows)                   |
| 5  | Plug                   | 33  | Nut for bolt (32)                |
| 7  | Guide bushing          | 37  | Plug stem with metal<br>bellows  |
| 8  | Threaded bushing       | 39  | Gasket                           |
| 9  | Stem connector nut     | 41  | Bellows nut                      |
| 10 | Lock nut               | 42  | Screw plug at test<br>connection |
| 13 | Stud bolt              | A26 | Stem connector clamp             |
| 14 | Nut for stud bolt (13) |     |                                  |
| 15 | Packing                |     |                                  |
| 17 | Gasket                 |     |                                  |
| 22 | Bellows seal           |     |                                  |

Parts for Series 240 Valves (example shows Type 3241 with bellows seal)

## 2 Tightening torques

### Note concerning the following specifications

- All tightening torques specified in Nm
- Tightening torque tolerance:  $\pm 10\%$
- The tightening torques are based on a friction coefficient of 0.06 with a lubricated seat thread and facing.
- After long operating times or long periods or use at temperatures above 250 °C, the breakaway torque may be twice as high as the tightening torque.
- Certain valves (e.g. Type 3248) have their own tightening torques. Refer to the documentation for specific valve models.

### 2.1 Tightening torques to install the seat

Tightening torques in Nm · Seat (4)

Valve size			Seats made of 1.4006, 1.4462 and 2.4610		Seats made of 2.4360, 2.4856, 2.4068 and 1.4876		Seats made of all other materials	
DN	NPS	Thread	Without torque multiplier	With torque multiplier <sup>1)</sup>	Without torque multiplier	With torque multiplier <sup>1)</sup>	Without torque multiplier	With torque multiplier <sup>1)</sup>
15 to 25	½ to 1	M32 x 1.5	170	— <sup>2)</sup>	130	— <sup>2)</sup>	160	— <sup>2)</sup>
32 to 50	1½ to 2	M58 x 1.5	500	40	380	30	480	38
65 to 80	2½ to 3	M90 x 1.5	1050	84	800	64	900	72
100	4	M110 x 1.5	1550	124	1150	92	1250	100
125	5	M125 x 1.5	1750	140	1300	104	1400	112
150	6	M152 x 1.5	2600	208	2000	160	2300	184
DN	NPS	Thread	Without hydraulic power tool	With hydraulic power tool <sup>3)</sup>	Without hydraulic power tool	With hydraulic power tool <sup>3)</sup>	Without hydraulic power tool	With hydraulic power tool <sup>3)</sup>
200	8	M230 x 3	5000	650	3750	490	4500	585
250	10	M285 x 3	7500	810	5650	610	6750	730
300	12	M350 x 4	13000	1210	9800	915	11700	1090

1) Torque multiplier with gear ratio 1:12.5

2) Only use a torque wrench to tighten the seat (do not use an additional torque multiplier).

3) The following multiplication factors apply when using the hydraulic power tool: DN 200: 7.7, DN 250: 9.25, DN 300: 10.75

### Special tools

The following tools can be used to install and remove the seat:

Valve size		Tool	Item no.	Photo
DN	NPS	Tool	Item no.	Photo
Up to 200	Up to 8	Torque multiplier SX30, gear ratio 1:12.5, max. 3000 Nm	9932-3808	
200 to 500	8 to 20	Hydraulic power tool	1280-1010	

## 2.2 Tightening torques for connection of body and bonnet/flange

Valve size		Thread of stud bolt Body/bonnet	No. of bolts	Tightening torque for stud bolt (13) in Nm
DN	NPS			
15 to 25	½ to 1	M10/¾" – 16 UNC	4	30
32 to 50	1½ to 2	M12/½" – 13 UNC	4	50
65 to 80	2½ to 3	M16/⅝" – 11 UNC	4	100
100	4	M20/¾" – 10 UNC	4	150
125	5	M16	8	120
150	6	M20/1" – 8 UNC	8	160
200	8	M27/1" – 8 UNC	8	230
250	10	M24/⅞" – 9 UNC	16	170
300	12	M27/1" – 8 UNC	16	250

## 2.3 Tightening torques for plug stem connection in versions with insulating section or bellows seal

Valve size		Tightening torque for plug/plug stem (5) in Nm
DN	NPS	
15 to 80	½ to 3	50
100 to 150	4 to 6	140

## 2.4 Tightening torques for screw plug at test connection

Valve size		Tightening torque for screw plug (42) in Nm
DN	NPS	
15 to 80	½ to 3	30
100 to 150	4 to 6	30

## 2.5 Tightening torques for nuts (bellows seal)

Valve size		Tightening torque for nut (bellows seal) (41) in Nm
DN	NPS	
15 to 80	½ to 3	160
100 to 150	4 to 6	200

## 2.6 Tightening torques for connection of bonnet/flange with insulating section or bellows seal

Valve size		Thread of bolt (32)	No. of bolts	Tightening torque for bolt (32) in Nm
DN	NPS			
15 to 80	½ to 3	M10/¾" – 16 UNC	4	50
100 to 150	4 to 6	M20/1" – 8 UNC	4	160
200 to 300	8 to 12	M27/1" – 8 UNC	8	230

## 2.7 Tightening torques for threaded bushing

Valve size		Tightening torque for threaded bushing (8) in Nm
DN	NPS	
15 to 80	½ to 3	50
100 to 150	4 to 6	80

## 2.8 Tightening torques for stem connector nut and lock nut

Valve size		Connecting thread of plug stem (5)	Tightening torque for stem connector nut (9) in Nm
DN	NPS		
15 to 80	½ to 3	M10 x 1	50
100 to 150	4 to 6	M16x1.5 <sup>1)</sup>	120
200 and larger	8 and larger	M36 x 1.5	300

<sup>1)</sup> For DN 125 and 150 only

### Special tools

The following tools are required for the tightening torques:

Valve size		Tool	Item no.	Photo
DN	NPS			
15 to 80	½ to 3	Torque wrench	9932-2269	
100 and larger	4 and larger	Torque wrench	9932-2238	
15 to 80	½ to 3	Crowfoot wrench	9932-2281	
100 to 150	4 to 6	Crowfoot wrench	9532-0012	
200 and larger	8 and larger	Crowfoot wrench	1280-3188	
15 to 80	½ to 3	Open-end wrench	9932-1217	
100 to 150	4 to 6	Open-end wrench	9932-1225	
200 and larger	8 and larger	Open-end wrench	9932-3110	

## 2.9 Tightening torques for stem connector clamps

The following tightening torques apply for connecting the actuator and plug stems:

Actuator area in cm <sup>2</sup>	Connecting diameter in mm	Thread size	Tightening torque for stem connector clamps (A26) in Nm
80 to 240	10	M5	5
350 to 700	16	M6	9
1400	22	M12	75
2800	40	M16	145

### Special tools

The following tools are required for the tightening torques:

Actuator area in cm <sup>2</sup>	Tool	Item no.	Photo
80 to 240 350 to 700	Torque wrench	9932-3812	
1400 2800	Torque wrench	9932-3814	
1400	Hexagon socket	9932-3324	
2800	Hexagon socket	9932-3328	

### 3 Lubricant

#### **⚠ WARNING**

*Damage to health after contact with hazardous substances.*

Certain lubricants (e.g. 8150-4008) are classified as hazardous substances. These substances have a special label and a material safety data sheet (MSDS) issued by the manufacturer.

- Make sure that an MSDS is available for any hazardous substance used. If necessary, contact the manufacturer to obtain an MSDS.
- Inform operating personnel about the hazardous substances and their correct handling.

#### 3.1 Recommended lubricant

Application	Quantity in g	Temperature range in °C	Color	Item no. of lubricant
Valves for oxygen service (free of oil and grease)	60	–60 to +250	White	8150-0116
Pneumatic devices (O-rings, guide bearings)	–	–40 to +260	White/transparent	8150-0100
Seat thread, stud bolts, spring compression	250	–180 to +1200	Gray	8150-4008
Plug stem seal	10	–200 to +220	White	8150-4000
	60			8150-4007
	650			8150-0073

#### 3.2 Lubricant for adjustable packings

For valve materials EN-GJL-250 (EN-JL 1040), EN-GJS-400-18-LT (EN-JL 1049), 1.0619, 1.0402, 1.4571, 1.4581, and 1.4408

Packing form	Item no. of lubricant	Packing item number		
		DN 15 to 50 NPS ½ to 2	DN 65 to 80 NPS 2½ to 3	DN 100 to 150 NPS 4 to 6
A	8150-0111	1120-1078	1120-1100	1120-1079
B		1120-1080	1120-1101	1120-1081
C		1120-1082	1120-1102	1120-1083
W		1120-1090	1120-1103	1120-1091
H	Do not use any lubricant.	1120-1096	1120-1104	1120-1097
I		1120-1098	1120-1105	1120-1099

### 3.3 Lubricant sorted by parts and versions

Application	Seat	Stud bolt	Plug	Plug stem with metal bellows
Number within drawing (see section 1.3)	4	13	5	37
Series 240	8150-4008	8150-4008	8150-4000/ 8150-4007/ 8150-0073	8150-4008
Version for gas (DIN EN 161)	8150-4008	8150-4008	8150-4000/ 8150-4007/ 8150-0073	8150-4008
Version for oxygen service (cold box)	8150-0116	8150-0116	8150-0116	8150-0116
Application	Retaining washer	Bellows nut	Bolt (bellows seal)	Packing
Number within drawing (see section 1.3)	30	41	32	15
Series 240	8150-4000/ 8150-4007/ 8150-0073	8150-4008	8150-4008	8150-4000/ 8150-4007/ 8150-0073
Version for gas (DIN EN 161)	8150-4000/ 8150-4007/ 8150-0073	8150-4008	8150-4008	8150-4000/ 8150-4007/ 8150-0073
Version for oxygen service (cold box)	8150-0116	8150-0116	8150-0116	8150-0116

## 4 Tools

### 4.1 Pliers for assembly and disassembly

Plug stem diameter in mm	Tool	Item no.	Photo
10 and 16	Pliers to hold parabolic plugs stationary	9129-1995	

### 4.2 Packing extractor

Valve size		Tool	Item no.	Photo
DN	NPS			
15 to 150	½ to 6	Packing extractor	1280-3037	
150 and larger	6 and larger	Packing extractor	1280-3035	
200 to 400	8 to 16	Packing extractor to pull out spacers out of the packing chamber	1280-3036	

### 4.3 Tool for high-temperature packings

Valve size		Tool	Item no.	Photo
DN	NPS			
15 to 80	½ to 3	Tool (modified threaded bushing), 10 mm plug stem diameter	1280-2005	
100 to 150	4 to 6	Tool (modified threaded bushing), 16 mm plug stem diameter	1280-2006	
200 to 500	8 to 20	Tool (modified threaded bushing), 40 mm plug stem diameter	1280-2009	
15 to 80	½ to 3	Socket wrench with 24 width across flats (modified threaded bushing), 10 mm plug stem diameter	1280-2010	
100	4	Socket wrench with 30 width across flats (modified threaded bushing), 16 mm plug stem diameter, 700 cm <sup>2</sup> actuator area	1280-2011	
100 to 150	4 to 6	Socket wrench with 30 width across flats (modified threaded bushing), 10 mm plug stem diameter, 1400 cm <sup>2</sup> actuator area	1280-2012	

## 1 Information on Type 3241 Valve

### 1.1 Technical data

	Type 3241	
Photo		
Valve size	DIN ANSI	DN 15 to 300 NPS ½ to 12
Associated product documentation	Data sheet Mounting and operating instructions	► T 8015 (DIN) and ► T 8012 (ANSI) ► EB 8015 (DIN) and ► EB 8012 (ANSI)

### 1.2 Note on different seat wrenches for Type 3241 (DN 250/NPS 10)

Until July 2003, the same body was used for Type 3241 Valves and self-operated regulators in sizes DN 250/NPS 10, regardless of the body material used.

After July 2003, a new body was used for Type 3241 Valves in DN 250/NPS 10. As a result, a different seat wrench is required for the new body (see table). This does not apply to self-operated regulators, which still use the original bodies. Other seat/plug trims are used for the new body of Type 3241 Valves.

	Body of Type 3241 · DN 250/NPS 10	
	Original body (until 2003)	New body (2003 onwards)
Dimensions	Seat thread M230 x 3 (same seat thread as for DN 200/NPS 8)	M285 x 3 (Standard seat thread for Series 250 Valves)
	Inside dimension from body facing to seat thread 221 mm	341 mm
External body marking (model number <sup>1)</sup> )	8294	8994 8995
Order number for seat wrench	1280-1000	1280-1101
Drawing		
Drawing no.	0101-3588	0103-4113

<sup>1)</sup> The model number is located on the body in the last row of the inscription field together with body marking. The number is cast at the foundry.

### 1.3 Parts

Parts of the valve assembly are listed in the Parts section for Series 240 Valves.

## 2 Tools

### 2.1 Tools for standard version

#### 2.1.1 Seat wrenches

Valve size DN	NPS	Pressure rating	Item no.	Photo
15 to 25	1	–	0440-0065	
32 to 50	2	–	9110-2464	
65 to 80	3	–	9110-2467	
100	4	–	9110-2471	
125	5	–	9110-4075	
150	6	–	9110-4076	
200	8	10 to 40	1280-1000	
250	10	10 to 40	1280-1000/1280-1101 <b>Read note in section 1.2.</b>	
300	12	10 to 40	1280-1200	

#### Special tools

The following tools are additionally required to install and remove the seat:

Valve size DN	NPS	Tool	Item no.	Photo
32 to 150	1¼ to 6	Torque multiplier SX30, gear ratio 1:12.5, max. 3000 Nm	9932-3808	
32 to 50	1¼ to 2	Torque wrench	9932-3812	
80 to 150	3 to 6	Torque wrench	9932-3814	
200 to 500	8 to 20	Hydraulic power tool	1280-1010	

## 2.1.2 Packing tools

Valve size		Tool	Item no.	Photo
DN	NPS			
15 to 80	½ to 3	Mandrel (for adjustable packing)	1280-3061	
15 to 80	½ to 3	Caulking tool	1280-3062	
100 to 150	4 to 6	Mandrel (for adjustable packing)	1280-3063	
100 to 150	4 to 6	Caulking tool	1280-3064	
15 to 80	½ to 3	Punch for guide bushing	1280-3081	
100 to 150	4 to 6	Punch for guide bushing	1280-3087	
50 to 400	2 to 16	Packing extractor	1280-3035	
200 and larger	8 and larger	Packing extractor to pull out spacers out of the packing chamber	1280-3036	
200 and larger	8 and larger	Packing tool (40 mm diameter)	1280-3041	
200 and larger	8 and larger	Hook wrench to loosen and tighten the packing nut	1280-3000	

## 2.2 Tools for version with insulating section or bellows seal

Valve size		Tool	Item no.	Photo
DN	NPS			
15 to 80	½ to 3	Socket wrench for bellows/plug unit	1280-3018	
15 to 80	½ to 3	Wrench for bellows nut <sup>1)</sup>	1280-4002	
100 to 150	4 to 6	Socket wrench for bellows (width across flats 19)	1280-3019 <sup>2)</sup>	
100 to 150	4 to 6	Wrench for bellows nut <sup>1)</sup>	1280-4005	
100 to 150	4 to 6	Socket wrench for bellows (width across flats 17)	1280-3097 <sup>2)</sup>	

<sup>1)</sup> Wrenches for the bellows nut are only required for versions with bellows seal.

<sup>2)</sup> The bellows used in Type 3241 Valves in DN 100 to 150/NPS 4 to 6 have been changed. The assembly wrench (1280-3019) is used for the old bellows/plug unit (1190-1838). The assembly wrench (1280-3097) is used for the new bellows/plug unit (1990-6885).

## 2.3 Tools for version with pressure balancing

Special wrench fittings and torque wrenches are required for Type 3241 Valves with pressure balancing with ring nut to install the ring nut. No special tools are required for valve versions with clamping rings.

### **i Note**

Contact SAMSON's After-sales Service department to find out which version is used in the valve (ring nut or clamping ring).

			Wrench fitting		Ring nut	Torque wrench		
Valve size		Seat bore	Item no.	Photo	Item no.	Item no.	Photo	
DN	NPS							
80	3	80	1280-6043		0250-1702	9932-2268		
100	4							
125	5							
150	6		1280-6045		0250-1791	9932-2268		
200	8							
250	10							
300	12							

## 2.4 Tools for PSA valves

Special mandrels are required to install guide bushings and wiper rings in PSA valves (Type 3241, Type 3243 and Type 3244):

Valve size	Tool	Item no.	Photo
DN	NPS		
15 to 80	Mandrel to install guide bushings	1280-3025	
100 to 150		1280-3022	
15 to 80	Mandrel to install wiper rings	1280-3023	
100 to 150		1280-3020	

## 2.5 Tools for valves with AC trims

### Seat wrenches for AC-1 and AC-2 trims

Valve size		Item no.	Photo
DN	NPS		
50	2	9110-2464	
80	3	9110-2467	
100	4	9110-2471	
150	6	9110-4076	
200	8	1280-1005	
250	10	1280-1101	
300	12	1280-1200	

### Special tools

The following tools are additionally required to install and remove the seat:

Valve size		Tool	Item no.	Photo
DN	NPS			
32 to 150 <sup>1)</sup>	1 1/4 to 6 <sup>1)</sup>	Torque multiplier SX30, gear ratio 1:12.5, max. 3000 Nm	9932-3808	
32 to 50	1 1/4 to 2	Torque wrench	9932-3812	
80 to 150	3 to 6	Torque wrench	9932-3814	
200 to 500	8 to 20	Hydraulic power tool	1280-1010	

## 2.6 Lifting equipment

Valve size		Tool	Item no.	Photo
DN	NPS			
200 and larger	8 and larger	Ring nut for plug stem with Ø 40 mm with M36 x 1.5 connecting thread	1280-3093	
200 and larger	8 and larger	Sling	1280-3034	

## 1 Information on Type 3244 Valve

### 1.1 Technical data

		Type 3244
Photo		
Valve size	DIN ANSI	DN 15 to 150 NPS ½ to 6
Style		Three-way valve (mixing or diverting valve)
Associated product documentation	Data sheet Mounting and operating instructions	► T 8026 ► EB 8026

### 1.2 Parts

Parts of the valve assembly are listed in the Parts section for Series 240 Valves.

## 2 Tightening torques

### 2.1 Tightening torques for screws to mount the plug in diverting valves

Valve size		Seat bore ( $\emptyset$ ) in mm	Thread type	Tightening torque for bolt in Nm
DN	NPS			
32 to 50	1½ to 2	31	M8	20
40 to 50	1½ to 2	38	M6	12
50 to 80	2 to 3	48	M6	12
65 to 80	2½ to 3	63	M8	20
100	4	80	M8	25
125	–	90	M10	35
150	6	100	M10	40

### 2.2 Other tightening torques

Further tightening torques are listed in the section on tightening torques for Series 240 Valves.

### 3 Tools

#### 3.1 Tools for standard version

##### 3.1.1 Seat wrenches

Valve size		Item no.	Photo
DN	NPS		
15 to 25	1	1280-0112	
32 to 50	2	1280-0209	
65 to 80	3	1280-0305	
100	4	1280-0405	
125	5	1280-0505	
150	6	1280-0605	

##### Special tools

The following tools are additionally required to install and remove the seat:

Valve size		Tool	Item no.	Photo
DN	NPS			
32 to 150	1¼ to 6	Torque multiplier SX30, gear ratio 1:12.5, max. 3000 Nm	9932-3808	
32 to 50	1¼ to 2	Torque wrench	9932-3812	
80 to 150	3 to 6	Torque wrench	9932-3814	

### 3.1.2 Packing tools

Valve size		Tool	Item no.	Photo
DN	NPS			
15 to 80	½ to 3	Mandrel (for adjustable packing)	1280-3061	
15 to 80	½ to 3	Caulking tool	1280-3062	
100 to 150	4 to 6	Mandrel (for adjustable packing)	1280-3063	
100 to 150	4 to 6	Caulking tool	1280-3064	
15 to 80	½ to 3	Punch for guide bushing	1280-3081	
100 to 150	4 to 6	Punch for guide bushing	1280-3087	

### 3.2 Tools for version with insulating section or bellows seal

Valve size		Tool	Item no.	Photo
DN	NPS			
15 to 80	½ to 3	Socket wrench for bellows/plug unit	1280-3018	
15 to 80	½ to 3	Wrench for bellows nut <sup>1)</sup>	1280-4002	
100 to 150	4 to 6	Socket wrench for bellows (width across flats 19)	1280-3019 <sup>2)</sup>	
100 to 150	4 to 6	Wrench for bellows nut <sup>1)</sup>	1280-4005	
100 to 150	4 to 6	Socket wrench for bellows (width across flats 17)	1280-3097 <sup>2)</sup>	

<sup>1)</sup> Wrenches for the bellows nut are only required for versions with bellows seal.

<sup>2)</sup> The bellows used in Type 3244 Valves in DN 100 to 150/NPS 4 to 6 have been changed. The assembly wrench (1280-3019) is used for the old bellows/plug unit (1190-1838). The assembly wrench (1280-3097) is used for the new bellows/plug unit (1990-6885).

### 3.3 Tools for mixing valves with insulating section or bellows seal

Valve size		Tool	Item no.	Photo
DN	NPS			
15 to 50	½ to 2	Tool to install bellows	1280-4003	
65 to 150	2½ to 6	Tool to install bellows	1280-4004	

### 3.4 Tools for PSA valves

Special mandrels are required to install guide bushings and wiper rings in PSA valves (Type 3241, Type 3243 and Type 3244):

Valve size		Tool	Item no.	Photo
DN	NPS			
15 to 80	½ to 3	Mandrel to install guide bushings	1280-3025	
100 to 150	4 to 6		1280-3022	
15 to 80	½ to 3	Mandrel to install wiper rings	1280-3023	
100 to 150	4 to 6		1280-3020	

## 1 Information on Type 3248 and Type 3246 Valves

### 1.1 Technical data for Type 3248

	Type 3248		
Photo			
Valve size	DIN	DN 15 to 150 <sup>1)</sup>	
	ANSI	NPS ½ to 6	
Style		Globe or angle valve Top-entry design	
	Data sheet	► T 8093 ► T 8093-1	
Associated product documentation	Mounting and operating instructions	► EB 8093	
	Spare parts list	► EL 8093	

<sup>1)</sup> Additional versions: cryogenic valve as micro-flow version in DN 10 (Linde), aluminum angle-style valve body in DN 200 (Linde, Messer) . Tools only on request

### 1.2 Note on special versions of Type 3248

#### **i Note**

The Type 3248 Valve is available in various special versions, e.g. valve size, pressure rating, and material different than specified for the standard version. These special versions were originally manufactured according to the customer specifications. As a result, the special versions are listed along with the name of the customer in this document, even in cases where these originally special versions have become standard.

### 1.3 Technical data for Type 3246

	Type 3246		
Photo			
Valve size	DIN	DN 15 to 300	
	ANSI	NPS 1/2 to 12	
Style	Globe or three-way valve (mixing valve) Non-top-entry design		
	Data sheet	<a href="#">► T 8046-1</a> <a href="#">► T 8046-2</a> <a href="#">► T 8046-3</a>	
Associated product documentation	Mounting and operating instructions	<a href="#">► EB 8046</a>	
	Spare parts list	<a href="#">► EL 8046</a>	

### 1.4 Note on versions of Type 3246

#### **i** Note

The Type 3246 is based on the Type 3241, Type 3251 or Type 3244 Valve, depending on the valve style and pressure rating. The required tools vary accordingly. Therefore, it is important to always specify the actuators's configuration ID or the SAMSON order number (including position within the order) when ordering spare parts, for repairs, and after-sales inquiries. These data include information on which version is used.

#### Design of Type 3246

All versions of the Type 3246 Valve contain the following parts:

- Long insulating section
- Circulation inhibitor, consisting of:
  - White PTFE-silk cords from adjustable packing
  - Threaded bushing 2.4360 (Monel) or 2.0402 (brass)
  - Grub screw (hexagon socket) to secure the threaded bushing
  - Packing spring or brass sleeve (the latter requires more packing rings)

A top-entry design is not used for these valves.

Since September 2007, the overall heights have changed and various cover plates for air separation units (ASU) and hydrogen/carbon monoxide (HyCO) plants are available for Type 3246 Valves.

#### Documentation and tools for Type 3246

Type 3246 – Version	Based on valve	Associated documentation	Associated tools, tightening torques, and lubricant
Globe valve, Class 150 to 300	Type 3241 Valve with welding ends	<a href="#">► EB 8046</a> <a href="#">► T 8046-1</a>	<a href="#">► AB 0100, Type 3241</a> <a href="#">► AB 0100, Series 240</a>
Globe valve, Class 600 to 900	Type 3251 Valve with welding ends	<a href="#">► EB 8046</a> <a href="#">► T 8046-2</a>	<a href="#">► AB 0100, Type 3251</a> <a href="#">► AB 0100, Series 250</a>
Three-way valve, Class 150 to 300	Type 3244 Valve with flanges	<a href="#">► EB 8046</a> <a href="#">► T 8046-3</a>	<a href="#">► AB 0100, Type 3244</a> <a href="#">► AB 0100, Series 240</a>

## Spare parts for Type 3246

Spare parts for Type 3246 differing from those required for Types 3241, 3244, and 3251 Valves (basis version):

Type 3246 – Spare parts					
Valve size		Pressure rating		Plug	Packing
DN	NPS	PN	Class		
15 to 50	½ to 2	16 to 40	150 to 300	Plug of Type 3241 for DN 65 to 80/NPS 2½ to 3; longer plug stem (135 mm)	Packing of Type 3241 for Class 150 to 300
15 to 40	½ to 1½	100 to 160	600 to 900	Plug with 16 mm plug stem diameter	Packing depending on plug stem diameter same as Series 250 (assignment of valve sizes differs)
50 to 100	2 to 4	100 to 160	600 to 900	Plug with 25 mm plug stem diameter	Packing depending on plug stem diameter same as Series 250 (assignment of valve sizes differs)
150	6	100 to 160	600 to 900	Plug with 40 mm plug stem diameter	Packing depending on plug stem diameter same as Series 250 (assignment of valve sizes differs)

## 1.5 Note on the use in air separation units (Type 3246 and Type 3248)

### **⚠ WARNING**

Type 3248 and Type 3246 Valves are frequently installed in air separation units used to produce oxygen. Precautions must be taken to prevent a possible fast reaction of oxygen leading to combustion. Therefore, all maintenance staff must attend a training at SAMSON lasting several days before they can perform any maintenance work on valves installed in air separation plants.


## 1.6 Parts

A sample exploded diagram of a Type 3248 Valve is shown on the next page.


The exploded diagrams of the Series 240 or 250 Valves apply to the Type 3246 Valve depending on the version (see section 1.4).

### Legend for the exploded diagrams on the next pages

1	Body	15	Packing	37	Plug stem with metal bellows
2	Bonnet/flange	17	Body gasket	39	Gasket
3	Yoke	22	Bellows seal	41	Bellows nut
4	Seat	24	Guide bushing (bellows)	42	Screw plug at test connection
5	Plug	27	Flange	71	Spacer stem
7	Guide bushing	28	Clamping ring	92	Castellated nut
8	Threaded bushing (packing nut)	30	Retaining washer		
9	Stem connector nut	32	Bolt (bellows)		
10	Lock nut	33	Nut for bolt (32)		
13	Stud bolt	34	Bolt for flange (27)		
14	Nut for stud bolt (13)	35	Lock nut for guide bushing (24)		

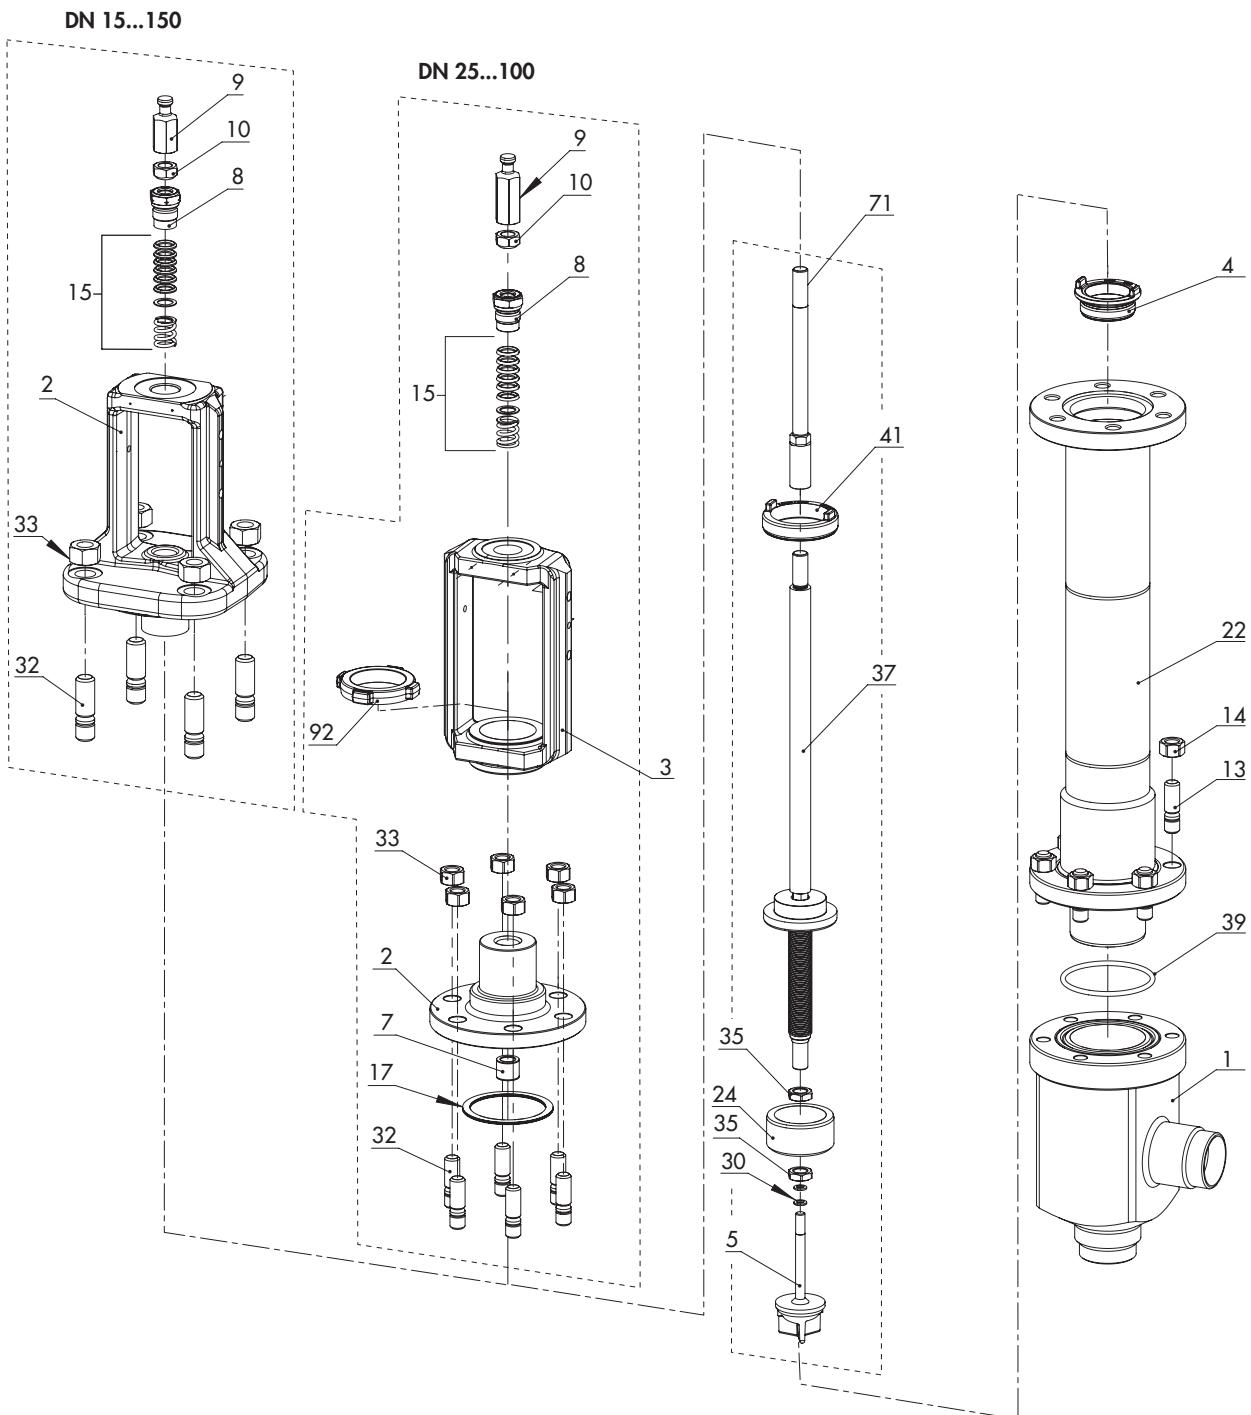

Example showing Type 3248 parts: stainless steel version with aluminum angle-style valve body, top-entry design

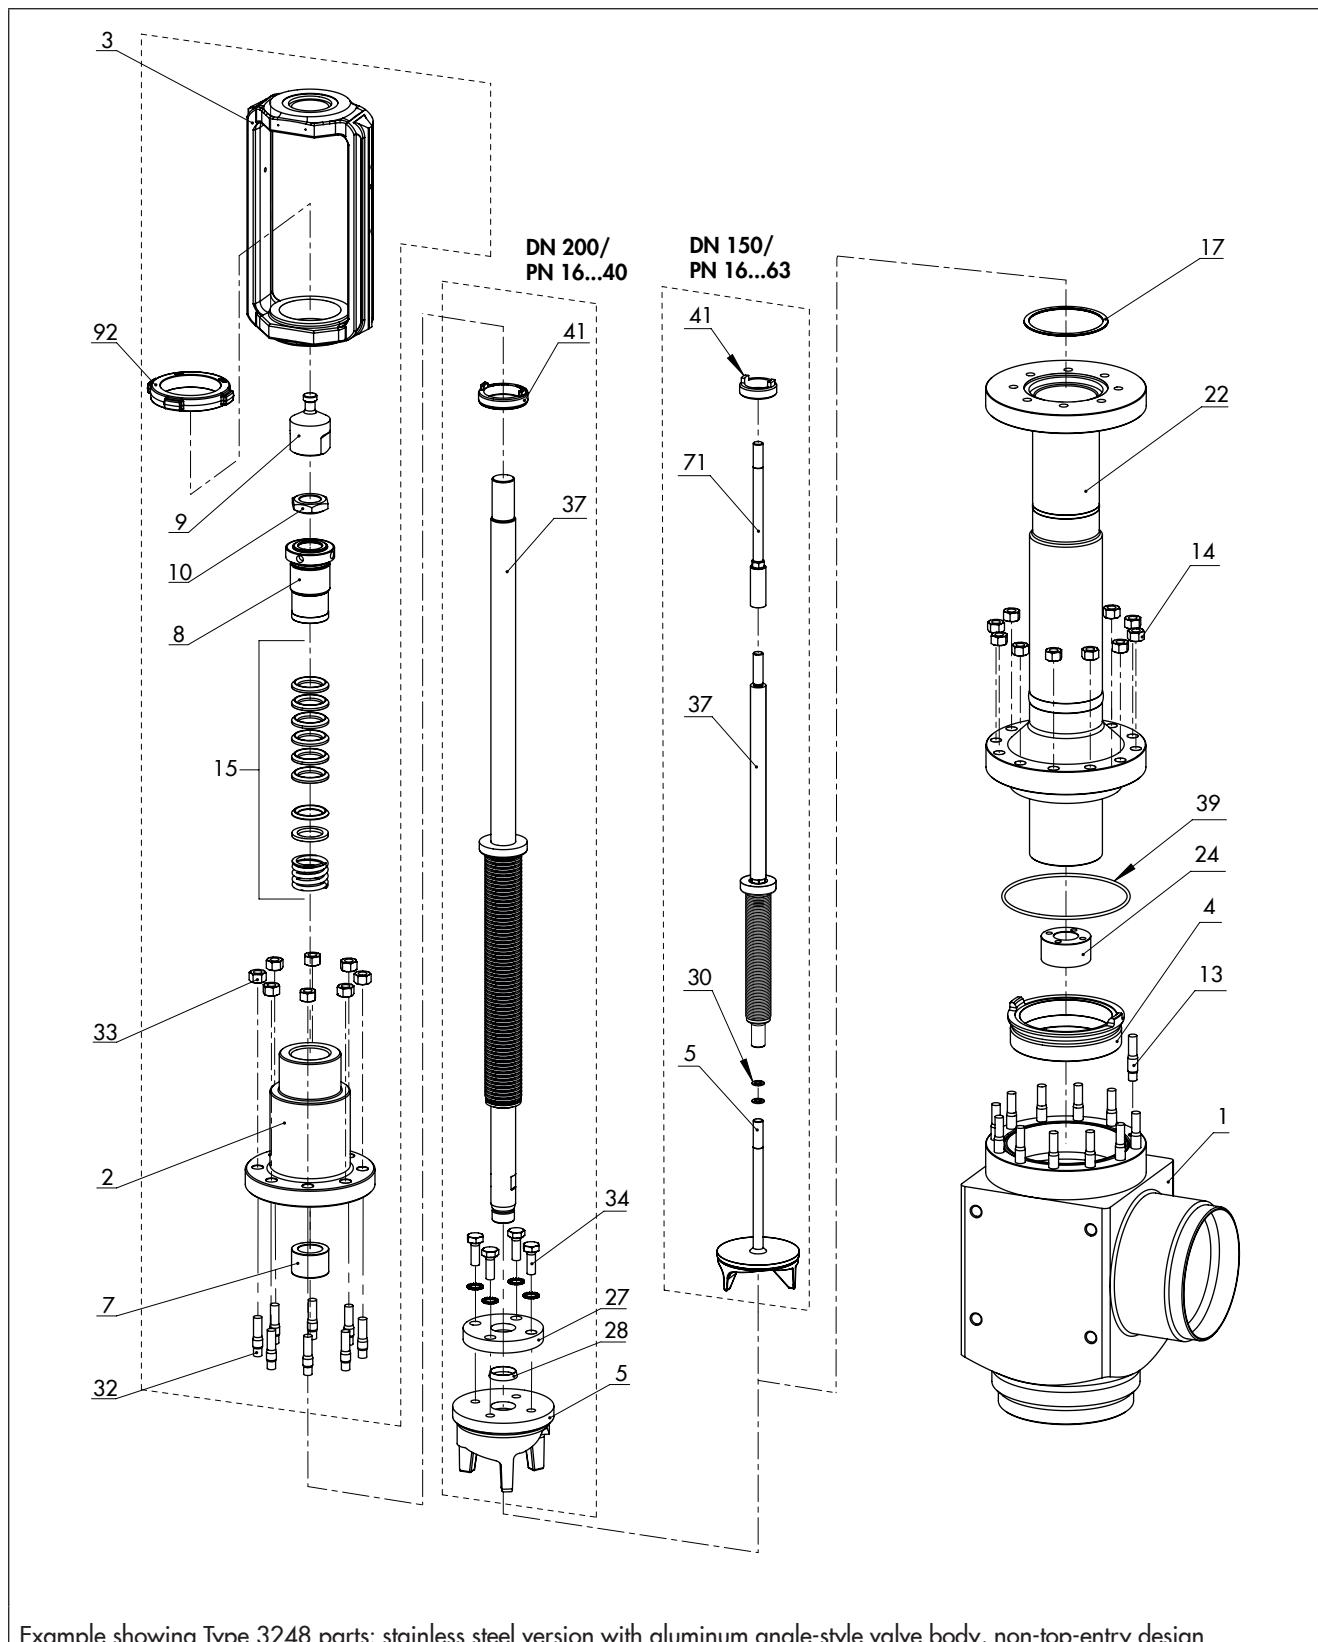

Example showing Type 3248 parts: stainless steel version with aluminum angle-style valve body, non-top-entry design

## 2 Tightening torques

### 2.1 Tightening torques for Type 3248 (DN 15 to 150/NPS ½ to 6)

Drawing no.: 1010-3928

**i Note**

See section 2.3 for tightening torques for versions with aluminum angle valve.

#### 2.1.1 Tightening torques to install the seat

Tightening torques in Nm · Seat (4)

Valve size			Seats made of 1.4404		Seats made of 2.4610, 2.4819		Seats made of 2.4360		Aluminum valve body	
			Torque multiplier							
DN	NPS	Thread	Without	With <sup>1)</sup>	Without	With <sup>1)</sup>	Without	With <sup>1)</sup>	Without	With <sup>1)</sup>
15 to 25	½ to 1	M32 x 1.5	160	— <sup>2)</sup>	170	— <sup>2)</sup>	130	— <sup>2)</sup>	100	— <sup>2)</sup>
40 to 50	1½ to 2	M58 x 1.5	540	27	560	28	440	22	300	15
65 to 80	2½ to 3	M90 x 1.5	1020	51	1200	60	920	46	600	30
100	4	M110 x 1.5	1420	71	1780	89	1320	66	1000	50
150	6	M152 x 1.5	2620	131	2980	149	2280	114	1560	78

<sup>1)</sup> Total gear ratio 1:20 with torque multiplier (1990-5139) and gear (1990-5125), included in the basic tool set (1280-3047)

<sup>2)</sup> Only use a torque wrench to tighten the seat (do not use an additional torque multiplier).

#### 2.1.2 Tightening torques for nuts on body and bellows seal

(only for version with aluminum valve body)

Valve size		Tightening torque in Nm for nuts (14) on stud bolts (13) at the body (1) and bellows seal (22)
DN	NPS	
15 to 25	½ to 1	30
40 to 50	1½ to 2	40
65 to 80	2½ to 3	60
100	4	100
150	6	120

#### 2.1.3 Tightening torques for bolts on flange

Valve size		Tightening torque for bolt (34) on flange (27) in Nm
DN	NPS	
15 to 150	½ to 6	8

#### 2.1.4 Tightening torques for plug stem connection

Valve size		Tightening torque for plug/plug stem (5) in Nm
DN	NPS	
15 to 80	½ to 3	50
100 to 150	4 to 6	140

### 2.1.5 Tightening torques for spacer stem

Valve size		Tightening torque for distance stem (71) in Nm
DN	NPS	
15 to 80	½ to 3	30
100 to 150	4 to 6	40

### 2.1.6 Tightening torques for nuts on guide bushing (bellows)

Thread	Tightening torque for nut (35) on guide bushing (24) in Nm
M16 x 1.5	80
M22 x 1.5	150
M24 x 1.5	160
M35 x 1.5	200

### 2.1.7 Tightening torques for screw plug at test connection

Valve size		Tightening torque for screw plug (42) in Nm
DN	NPS	
15 to 150	½ to 6	25

### 2.1.8 Tightening torques for nuts (bellows seal)

DN	NPS	Tightening torque for nut (bellows seal) (41) in Nm	
		Without torque multiplier	With torque multiplier <sup>1)</sup>
15 to 25	½ to 1	200	– 2)
40 to 50	1½ to 2	1140	57
65 to 80	2½ to 3	2980	149
100	4	3660	183
150	6	4380	219

<sup>1)</sup> Total gear ratio 1:20 with torque multiplier (1990-5139) and gear (1990-5125), included in the basic tool set (1280-3047)

<sup>2)</sup> Only use a torque wrench to tighten the bellows nut (do not use an additional torque multiplier).

### 2.1.9 Tightening torques for nuts on bellows seal and bonnet/flange

DN	NPS	Pressure rating		Tightening torque in Nm for nuts (33) on bolts (32) on bellows seal (22) and bonnet/flange (2)
		PN	Class	
15 to 25	½ to 1	16 to 40	150 to 300	40
		63 to 100	600	50
40 to 50	1½ to 2	16 to 40	150 to 300	80
		63 to 100	600	80
65 to 80	2½ to 3	16 to 40	150 to 300	150
		63 to 100	600	110
100	4	16 to 40	150 to 300	130
		63 to 100	600	150
150	6	16 to 40	150 to 300	130
		63 to 100	600	190

### 2.1.10 Tightening torques for threaded bushing

Valve size		Pressure rating		Tightening torque for threaded bushing (8) in Nm
DN	NPS	PN	Class	
15 to 25	$\frac{1}{2}$ to 1	16 to 40	150 to 300	50
		63 to 100	600	60
40 to 50	$\frac{1}{2}$ to 2	16 to 40	150 to 300	50
		63 to 100	600	80
65 to 80	$\frac{1}{2}$ to 3	16 to 40	150 to 300	80
		63 to 100	600	80
100	4	16 to 40	150 to 300	80
		63 to 100	600	80
150	6	16 to 40	150 to 300	80
		63 to 100	600	220

### 2.1.11 Tightening torques for stem connector nut and lock nut

Valve size		Pressure rating		Tightening torque for stem connector nut (9) and lock nut (10) in Nm
DN	NPS	PN	Class	
15 to 25	$\frac{1}{2}$ to 1	16 to 40	150 to 300	50
		63 to 100	600	70
40 to 50	$\frac{1}{2}$ to 2	16 to 40	150 to 300	50
		63 to 100	600	120
65 to 80	$\frac{1}{2}$ to 3	16 to 40	150 to 300	120
		63 to 100	600	120
100	4	16 to 40	150 to 300	120
		63 to 100	600	120
150	6	16 to 40	150 to 300	120
		63 to 100	600	160

## 2.2 Tightening torques for Type 3248 (DN 10/NPS $\frac{1}{2}$ , micro-flow valve)

Special version for Linde as micro-flow valve for temperatures down to  $-270^{\circ}\text{C}$  and Air Liquide for temperatures down to  $-196^{\circ}\text{C}$

Drawing no.: 1040-0323

Component	Number within drawing (see section 1.6)	Tightening torque in Nm
Seat	4	20
Nuts for stud bolts	14	30
Spacer stem	71	20
Bellows nut	41	120
Test connection	42	25
Lock nut	10	8

### 2.3 Tightening torques for Type 3248 in DN 25 to 150, aluminum angle valve (Linde version)

The tightening torques are based on aluminum angle valves in DN 25 to 150 and PN 16 to 63 (Linde specification, drawing no. 1010-4200).

#### 2.3.1 Tightening torques to install the seat

Valve size DN	Tightening torque for seat (4) in Nm	
	Without torque multiplier	With torque multiplier <sup>1)</sup>
25	100	— <sup>2)</sup>
40 to 50	300	15
80	600	30
100	1000	50
150	1560	78

<sup>1)</sup> Total gear ratio 1:20 with torque multiplier (1990-5139) and gear (1990-5125), included in the basic tool set (1280-3047)

<sup>2)</sup> Only use a torque wrench to tighten the seat (do not use an additional torque multiplier).

#### 2.3.2 Tightening torques for nuts on body and bellows seal

Valve size DN	Tightening torque in Nm for nuts (14) on stud bolts (13) at the body (1) and bellows seal (22)
25	30
40 to 50	70
80	70
100	150
150	170

#### 2.3.3 Tightening torques for plug stem connection

Valve size DN	Tightening torque for plug/plug stem (5) in Nm
25 to 80	50
100 to 150	140

#### 2.3.4 Tightening torques for spacer stem

Valve size DN	Tightening torque for distance stem (71) in Nm
25 to 80	30
100 to 150	40

#### 2.3.5 Tightening torques for nuts on guide bushing

Valve size DN	Tightening torque for nuts (35) on guide bushing (24) in Nm
25 to 80	80
100 to 150	150

### 2.3.6 Tightening torques for screw plug at test connection

Valve size DN	Tightening torque for screw plug (42) in Nm
25 to 150	25

### 2.3.7 Tightening torques for nuts (bellows seal)

Valve size DN	Tightening torque for nut (bellows seal) (41) in Nm	
	Without torque multiplier	With torque multiplier <sup>1)</sup>
25	200	- <sup>2)</sup>
40 to 50	1140	57
80	2300	115
100	3660	183
150	920	46

<sup>1)</sup> Total gear ratio 1:20 with torque multiplier (1990-5139) and gear (1990-5125), included in the basic tool set (1280-3047)

<sup>2)</sup> Only use a torque wrench to tighten the bellows nut (do not use an additional torque multiplier).

### 2.3.8 Tightening torques for nuts on bellows seal and bonnet/flange

Valve size DN	Tightening torque in Nm for nuts (33) on bolts (32) on bellows seal (22) and bonnet/flange (2)
25	30
40 to 150	70

### 2.3.9 Tightening torques for threaded bushing

Valve size DN	Tightening torque for threaded bushing (8) in Nm
25	60
40 to 150	80

### 2.3.10 Tightening torques for stem connector nut and lock nut

Valve size DN	Tightening torque for stem connector nut (9) and lock nut (10) in Nm
25	70
40 to 150	120

## 3 Tools

### 3.1 Tool sets

Extensive sets of tools are available for Type 3248 Valves:

DN	NPS	Tool	Item no.	Photo
10 to 15	½	Set of tools for micro-flow version <sup>1)</sup>	1280-3189	
15 to 25	½ to 1	Tool set	1280-3073	
15 to 150	1 to 6	Basic tool set	1280-3047	

<sup>1)</sup> For example, for helium liquefaction at Linde Kryotechnik AG, Switzerland

#### i Note

*Due to continuous development of the Type 3248 Valve and the numerous special versions that are available, further tools are required in addition to the basic tool set (1280-3047). These tools are not part of the basic tool set and must be ordered separately.*

#### i Note


*The basic tool set (1280-3047) includes a torque multiplier for tightening using the gear (1990-5125). This torque multiplier is currently listed under the item number 1990-5139 and has a gear ratio of 1:20 (as of 2015). Earlier versions of the basic tool set included a torque multiplier listed under the item number 1990-5126 which had a gear ratio of 1:18.5.*

*Before assembly, check which torque multiplier you are using and which gear ratio applies as a result.*


### 3.2 Extensions

An extension may be required to mount or remove the seat of the Type 3248 Valve depending on the version. The use of an extension depends on the following factors:


- Valve size
- Pressure rating
- Globe or angle valve
- Material (aluminum or stainless steel)
- Dimension H5 from the seat facing in the body to the top of the flange (see Dimensional drawings)

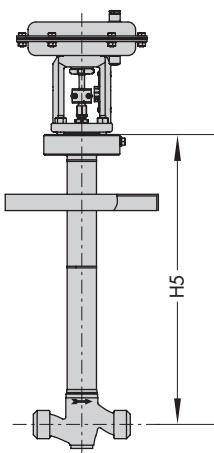**Dimensional drawings**

Globe valve with stainless steel body

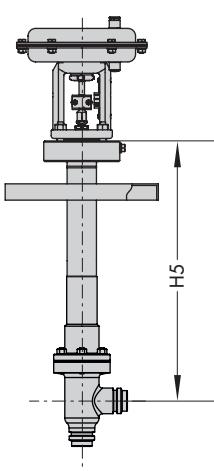

Angle valve with aluminum body

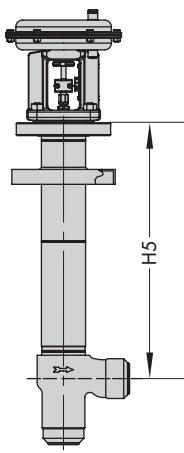

Angle valve with stainless steel body

**3.2.1 Extensions for the standard version**

Valve sizes DN 15 to 150 (NPS ½ to 6), pressure rating PN 16 to 100 (Class 150 to 600), versions with globe valve, angle valves with aluminum body or angle valves with stainless steel body, version for Air Products (HyCO)

Valve size		Item number for tool kit	Extension	Item number for extension	Photo
DN	NPS				
15 to 25	½ to 1	1280-3047	Without extension	-	
32 to 50	1¼ to 2	1280-3047	Extension for H5 higher than 665 mm	1280-3054	
65 to 80	2½ to 3	1280-3047	Extension for H5 higher than 665 mm	1280-3055	
100	4	1280-3047	Extension for H5 higher than 845 mm <sup>1)</sup>	1280-3055	
150	6	1280-3047	Extension for H5 higher than 840 mm	1280-3055	

<sup>1)</sup> A supporting flange (1890-8370) is additionally required for PN 63 to 100

**3.2.2 Extensions for Linde version**

Version as angle valve with aluminum body

Valve size DN	Item number for tool kit	Extension	Item number for extension	Photo
25	1280-3047	Without extension	-	
40 to 80	1280-3047	With extension	1280-3054	
100	1280-3047	With extension	1280-3055	
150	1280-3047	Without extension	-	

See Table Extensions for the standard version

### 3.3 Further tools for standard version


Valve size				
DN	NPS	Tool	Item no.	Photo
100	4	Supporting flange for PN 63 to 100/ Class 600	1890-8370	
15 to 150	½ to 6	Anti-rotation fixture for split plug stem (with 17 and 24 mm socket wrench); only re- quired for disassembly of bellows without anti-rotation fixture (year of manufacture 2000)	1280-3031	
15 to 150	½ to 6	Pliers for assembly and disassembly of parabolic plugs with 10 mm plug stem diameter	1280-3192	

#### Special tools

The following tools are additionally required for installation or removal:

Valve size				
DN	NPS	Tool	Item no.	Photo
150	6	Torque wrench	9932-3814	

### 3.4 Further tools for Linde and Messer versions

Valve size	Tool	Item no.	Photo
80	Special socket for bellows nut	0440-0211	
100	Supporting flange	1890-8370	
150	Tool (Linde) for non-top-entry version, in- cluding:  Supporting flange/adapter plate Special socket for bellows nut	1280-0616 1890-8369 0440-0192	
150	Special socket for bellows nut (individual part)	0440-0278	

**Special tools**

The following tools are additionally required for installation or removal:

Valve size DN	Tool	Item no.	Photo
150	Torque wrench	9932-3814	

**3.5 Additional clamping elements**

The additional clamping elements are required for AC-trims with special seat bores.

Seat bore	Tool	Item no.	Photo
16 mm	Clamping element	0320-2473	
18 mm	Clamping element	0320-2477	
22 mm	Clamping element	0320-2478	
50 mm	Clamping element	0320-2479	

## 1 Information on Series 250 and 280 Valves

### 1.1 Technical data of Series 250 Valves

		<b>Series 250</b> <b>Globe valves, three-way valves, and angle valves</b>
Valve size	DIN	DN 15 to 500
	ANSI	NPS ½ to 24
Pressure rating	DIN	Up to PN 400
	ANSI	Up to Class 2500

### 1.2 Technical data of Series 280 Valves

		<b>Series 280</b> <b>Steam-conditioning valves</b>
Valve size	DIN	DN 50 to 500
	ANSI	NPS 2 to 20
Pressure rating	DIN	Up to PN 160
	ANSI	Up to Class 900


### 1.3 Types of pressure balancing

SAMSON valves have different types of pressure balancing. The parts subject to wear and spare parts for the various types of pressure balancing are not interchangeable. Therefore, it is important to always specify the valve's configuration ID or the SAMSON order number (including position within the order) when ordering spare parts, for repairs and after-sales inquiries. These data include information on which type of pressure balancing is used in the valve.

### 1.4 Note on specifications

The construction of Series 280 Steam Conditioning Valves is based on that of Series 250 Valves. Therefore, the specifications apply to both Series 250 and Series 280, if not explicitly specified.

## 1.5 Parts

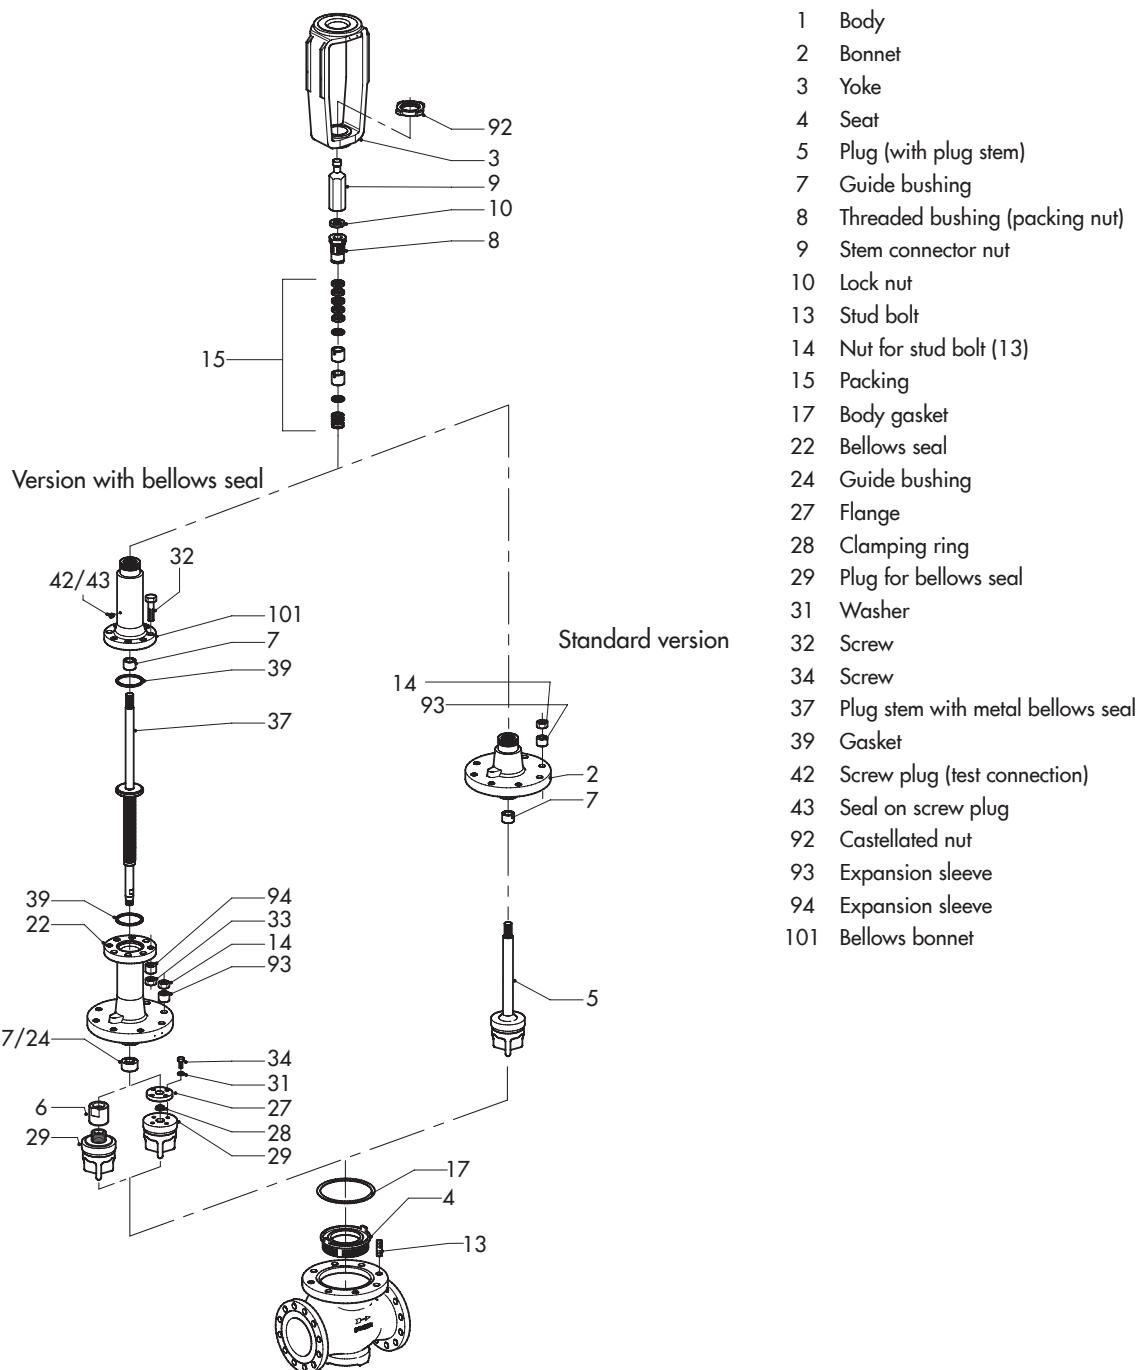

Parts for Series 250 Valves (example shows Type 3251)

### Note

Other Series 250 and 280 Valves are listed at ► [www.samson.de](http://www.samson.de) > Product documentation.

## 2 Tightening torques

### Note concerning the following specifications

- All tightening torques specified in Nm
- Tightening torque tolerance:  $\pm 10\%$
- The tightening torques are based on a friction coefficient of 0.06 with a lubricated seat thread and facing.
- After long operating times or long periods or use at temperatures above 250 °C, the breakaway torque may be twice as high as the tightening torque.
- Certain valve models (e.g. Type 3259) have their own tightening torques. Refer to the documentation for specific valve models.
- See next page for special tools available

### 2.1 Tightening torques to install the seat

Tightening torques in Nm · Seat (4)

Valve size		Seats made of 1.4006, 1.4462 and 2.4610		Seats made of 2.4360, 2.4856, and 1.4876		Seats made of all other materials	
DN	NPS	Without torque multiplier	With torque multiplier	Without torque multiplier	With torque multiplier	Without torque multiplier	With torque multiplier
15 to 25	½ to 1	180	— <sup>1)</sup>	140	— <sup>1)</sup>	160	— <sup>1)</sup>
32 to 40	1¼ to 1½	450	36 <sup>2)</sup>	340	28 <sup>2)</sup>	400	32 <sup>2)</sup>
50	2	550	44 <sup>2)</sup>	410	33 <sup>2)</sup>	500	40 <sup>2)</sup>
65 to 80	2½ to 3	1300	104 <sup>2)</sup>	980	79 <sup>2)</sup>	1170	94 <sup>2)</sup>
100	4	1800	144 <sup>2)</sup>	1350	108 <sup>2)</sup>	1620	130 <sup>2)</sup>
125	5	2800	70 <sup>3)</sup>	2100	53 <sup>3)</sup>	2520	63 <sup>3)</sup>
150	6	4000	100 <sup>3)</sup>	3000	75 <sup>3)</sup>	3600	90 <sup>3)</sup>
200	8	5000	125 <sup>3)</sup>	3750	94 <sup>3)</sup>	4500	113 <sup>3)</sup>
DN	NPS	Without hydraulic power tool	With hydraulic power tool <sup>4)</sup>	Without hydraulic power tool	With hydraulic power tool <sup>4)</sup>	Without hydraulic power tool	With hydraulic power tool <sup>4)</sup>
200	8	5000	650	3750	487	4500	585
250	10	7500	810	5650	611	6750	730
300	12	13000	1210	9800	912	11700	1088
400	16	17000	1232	12800	928	15300	1109
500	20	19000	1033	14250	775	17200	935

<sup>1)</sup> Only use a torque wrench to tighten the seat (do not use an additional torque multiplier).

<sup>2)</sup> Torque multiplier with gear ratio 1:12.5 (e.g. SX30)

<sup>3)</sup> Torque multiplier with gear ratio 1:40 (e.g. KWN 8000)

<sup>4)</sup> The following multiplication factors apply when using the hydraulic power tool: DN 200: 7.7, DN 250: 9.25, DN 300: 10.75, DN 400: 13.8, DN 500: 18.4

**Special tools**

The following tools can be used to install and remove the seat:

DN	NPS	Tool	Item no.	Photo
125 and 150	5 and 6	Torque multiplier KWN 8000, gear ratio 1:40, max. 8000 Nm	9932-3802	
Up to 200	Up to 8	Torque multiplier SX30, gear ratio 1:12.5, max. 3000 Nm	9932-3808	
200 and larger	8 and larger	Hydraulic power tool	1280-1010	

## 2.2 Tightening torques for connection of body and bonnet

### 2.2.1 Metal body gasket · All body materials

PN	DN	Thread	No. of bolts	Tightening torque in Nm	Class	NPS	UNC thread	Quantity	Tightening torque in Nm
40	15	M12	4	32	300	½	See Class 600		
	20	M12	4	32		¾			
	25	M12	4	32		1			
	32	M12	4	44		–			
	40	M12	4	44		1½			
	50	M16	4	92		2			
	65	M16	6	106		–			
	80	M16	6	106		3			
	100	M16	6	102		4			
	125	M20	6	196		–			
	150	M20	8	162		6			
	200	M27	8	470		8	1"-8	8	456
	250	M24	16	338		10	7/8"-9	16	322
	300	M27	16	464		12	1"-8	16	450
	400	M36	16	1048		16	1 3/8"-6	16	1034
	500	M36	20	1032		20	–		

PN	DN	Thread	No. of bolts	Tightening torque in Nm	Class	NPS	UNC thread	Quantity	Tightening torque in Nm	
-	-				600	½	5/8"-11	4	60	
	-					¾	5/8"-11	4	60	
	-					1	5/8"-11	4	60	
	-					1½	5/8"-11	5	68	
	-					2	¾"-10	6	112	
	-					3	¾"-10	8	118	
	-					4	¾"-10	12	90	
	-					6	1"-8	14	178	
	-					8	1½"-6	8	998	
	-					10	1½"-6	12	1074	
	-					12	1¾"-5	16	1164	
	-					16	1¾"-5	16	1974	
160	15	M16	4	80	900	½	See Class 1500			
	25	M16	4	80		1				
	32	M16	5	94		—				
	40	M16	5	94		1½				
	50	M20	6	156		2				
	65	M20	8	168		—				
	80	M20	8	168		3	¾"-10	8	158	
	100	M20	12	128		4	¾"-10	12	122	
	125	M24	12	234		—	—			
	150	M24	14	220		6	1"-8	14	236	
	200	M39	8	1364		8	1½"-6	8	1332	
	250	M39	12	1466		10	1½"-6	12	1432	
	300	M39	16	1348		12	1¾"-5	16	1554	
250 to 320	15	M20	4	164	1500	½	¾"-10	4	154	
	25	M20	4	164		1	¾"-10	4	154	
	40	M20	8	118		1½	¾"-10	8	112	
	50	M27	6	336		2	1⅛"-7	6	354	
	80	M27	8	360		3	1⅛"-7	8	380	
	100	M27	10	330		4	1⅛"-7	10	350	
	150	M33	12	570		6	1¼"-7	12	546	
	200	—				8	1¾"-5	12	1702	
	250	—				10	2"-4.5	12	3112	
	300	—				12	2"-4.5	16	2866	
400	15	M20	4	188	2500	½	¾"-10	4	178	
	25	M20	4	188		1	¾"-10	4	178	
	40	M20	8	136		1½	¾"-10	8	128	
	50	M27	6	388		2	1⅛"-7	6	410	
	80	M27	10	332		3	1⅛"-7	10	350	
	100	M30	10	428		4	1¼"-7	10	446	
	150	M45	10	1080		6	1¾"-5	10	1076	
	200	—				8	2¼"-4.5	8	3716	
	250	M48	16	2556		10	2¼"-4.5	16	2996	

## 2.2.2 Body gasket: cam-profile gasket · All body material except 2.4360/B164 N04400

PN	DN	Thread	Quantity	Tightening torque in Nm	Class	NPS	UNC thread	Quantity	Tightening torque in Nm	
40	15	M12	4	20	300	½	See Class 600			
	20	M12	4	20		¾				
	25	M12	4	20		1				
	32/ 40	M12	4	20		1½				
	50	M16	4	54		2				
	65	M16	6	54		–				
	80	M16	6	54		3				
	100	M16	6	70		4				
	125	M20	6	146		–				
	150	M20	8	130		6				
	200	M27	8	296		8	1"-8	8	350	
	250	M24	16	202		10	7/8"-9	16	238	
	300	M27	16	332		12	1"-8	16	392	
	400	M36	16	722		16	1 3/8"-6	16	896	
	500	M36	20	798		20	1 3/8"-6	20	1006	
63 to 100	See PN 160				600	½	5/8"-11	4	30	
						¾	5/8"-11	4	30	
						1	5/8"-11	4	30	
						1½	5/8"-11	5	46	
						2	¾"-10	6	82	
						3	¾"-10	8	116	
						4	¾"-10	12	100	
						6	1"-8	14	222	
						8	1 ½"-6	8	1004	
						10	1 ½"-6	12	1030	
						12	1 ¾"-5	16	1338	
						16	1 ¾"-5	16	2218	
						20	2 ¼"-4.5	20	3080	
160	15	M16	4	62	900	½	See Class 1500			
	25	M16	4	62		1				
	32	M16	5	72		–				
	40	M16	5	72		1½				
	50	M20	6	132		2				
	65	M20	8	186		–				
	80	M20	8	186		3	¾"-10	8	170	
	100	M20	12	160		4	¾"-10	12	148	
	125	M24	12	314		–	–			
	150	M24	14	322		6	1"-8	14	326	
	200	M39	8	1570		8	1 ½"-6	8	1484	
	250	M39	12	1616		10	1 ½"-6	12	1526	
	300	M39	16	1778		12	1 ¾"-5	16	1980	
	400	–				16	2 ¼"-4.5	16	3480	
	500	–				20	2 ¼"-4.5	20	4620	

PN	DN	Thread	Quantity	Tightening torque in Nm	Class	NPS	UNC thread	Quantity	Tightening torque in Nm
250 to 320	15	M20	4	116	1500	½	¾"-10	4	88
	25	M20	4	116		1	¾"-10	4	88
	40	M20	8	110		1½	¾"-10	8	86
	50	M27	6	334		2	1⅛"-7	6	284
	80	M27	8	480		3	1⅛"-7	8	410
	100	M27	10	498		4	1⅛"-7	10	424
	150	M33	12	998		6	1¼"-7	12	746
	200	M45	8	3130		8	2"-4.5	10	2426
	250					10	2"-4.5	12	3068
	300		-			12	2¼"-4.5	16	3702
	400					16	2¾"-4	16	7456
400	15	M20	4	144	2500	½	¾"-10	4	146
	25	M20	4	144		1	¾"-10	4	146
	40	M20	8	138		1½	¾"-10	8	142
	50	M27	6	416		2	1⅛"-7	6	470
	80	M27	10	480		3	1⅛"-7	10	530
	100	M30	10	694		4	1¼"-7	10	742
	150	M45	10	2038		6	1¾"-5	10	2032
	200		-			8	2½"-4	8	6090
	250	M48	16	3464		10	2½"-4	12	6216
	300		-			12	2¾"-4	16	7452

### 2.2.3 Body gasket: cam-profile gasket · Body material 2.4360/B164 N04400 only

PN	DN	Thread	Quantity	Tightening torque in Nm	Class	NPS	UNC thread	Quantity	Tightening torque in Nm
40	15	M12	4	16	300	½			
	20	M12	4	16		¾			
	25	M12	4	16		1			
	32/40	M12	4	16		1½			
	50	M16	4	40		2			
	65	M16	6	40		-			
	80	M16	6	40		3			
	100	M16	6	52		4			
	125	M20	6	110		-			
	150	M20	8	98		6			
	200	M27	8	222		8	1"-8	8	262
	250	M24	16	152		10	⅝"-9	16	178
	300	M27	16	250		12	1"-8	16	294
	400	M36	16	542		16	1¾"-6	16	672
	500	M36	20	598		20	1¾"-6	20	754

See Class 600

## Tightening torques

PN	DN	Thread	Quantity	Tightening torque in Nm	Class	NPS	UNC thread	Quantity	Tightening torque in Nm	
63 to 100	See PN 160				600	½	5/8"-11	4	22	
	200	M39	8	698		¾	5/8"-11	4	22	
	250	M39	12	712		1	5/8"-11	4	22	
	300	M39	16	790		1½	5/8"-11	5	34	
	400	M45	16	1426		2	¾"-10	6	62	
	500	—				3	¾"-10	8	88	
	200	M39	8	698		4	¾"-10	12	76	
	250	M39	12	712		6	1"-8	14	166	
	300	M39	16	790		8	1½"-6	8	754	
	400	M45	16	1426		10	1½"-6	12	772	
	500	—				12	1¾"-5	16	1004	
	200	M39	8	698		16	1¾"-5	16	1664	
	250	M39	12	712		20	2¼"-4.5	20	2310	
	300	M39	16	790		15	M16	4	46	
160	200	M39	8	1178	900	25	M16	4	46	
	250	M39	12	1212		32	M16	5	54	
	300	M39	16	1332		40	M16	5	54	
	400	—				50	M20	6	100	
	500	—				65	M20	8	140	
	200	M39	8	1178		80	M20	8	140	
	250	M39	12	1212		100	M20	12	120	
	125	M24	12	236		125	M24	12	236	
	150	M24	14	242		150	M24	14	242	
	200	M39	8	1178		200	M39	8	1178	
	250	M39	12	1212		250	M39	12	1212	
	300	M39	16	1332		300	M39	16	1332	
	400	—				400	—			
	500	—				15	M20	4	88	
250 to 320	25	M20	4	88	1500	25	M20	4	88	
	40	M20	8	82		40	M20	8	82	
	50	M27	6	250		50	M27	6	250	
	80	M27	8	360		80	M27	8	360	
	100	M27	10	374		100	M27	10	374	
	150	M33	12	748		150	M33	12	748	
	200	M45	8	2348		200	M45	8	2348	
	250	—				250	—			
	300	—				300	—			
	400	—				400	—			
	200	M45	8	2348		15	M20	4	88	
	250	—				25	M20	4	88	
	300	—				40	M20	8	82	
	400	—				50	M27	6	250	
	200	M45	8	2348		80	M27	8	360	
	250	—				100	M27	10	374	
	300	—				150	M33	12	748	
	400	—				200	M45	8	2348	
	200	M45	8	2348		250	M33	12	748	
	250	—				300	—			
	300	—				400	—			
	200	M45	8	2348		15	M20	4	88	
	250	—				25	M20	4	88	
	300	—				40	M20	8	82	
	400	—				50	M27	6	250	
	200	M45	8	2348		80	M27	8	360	
	250	—				100	M27	10	374	
	300	—				150	M33	12	748	
	400	—				200	M45	8	2348	
	200	M45	8	2348		250	M33	12	748	
	250	—				300	—			
	300	—				400	—			
	200	M45	8	2348		15	M20	4	88	
	250	—				25	M20	4	88	
	300	—				40	M20	8	82	
	400	—				50	M27	6	250	
	200	M45	8	2348		80	M27	8	360	
	250	—				100	M27	10	374	
	300	—				150	M33	12	748	
	400	—				200	M45	8	2348	
	200	M45	8	2348		250	M33	12	748	
	250	—				300	—			
	300	—				400	—			
	200	M45	8	2348		15	M20	4	88	
	250	—				25	M20	4	88	
	300	—				40	M20	8	82	
	400	—				50	M27	6	250	
	200	M45	8	2348		80	M27	8	360	
	250	—				100	M27	10	374	
	300	—				150	M33	12	748	
	400	—				200	M45	8	2348	
	200	M45	8	2348		250	M33	12	748	
	250	—				300	—			
	300	—				400	—			
	200	M45	8	2348		15	M20	4	88	
	250	—				25	M20	4	88	
	300	—				40	M20	8	82	
	400	—				50	M27	6	250	
	200	M45	8	2348		80	M27	8	360	
	250	—				100	M27	10	374	
	300	—				150	M33	12	748	
	400	—				200	M45	8	2348	
	200	M45	8	2348		250	M33	12	748	
	250	—				300	—			
	300	—				400	—			
	200	M45	8	2348		15	M20	4	88	
	250	—				25	M20	4	88	
	300	—				40	M20	8	82	
	400	—				50	M27	6	250	
	200	M45	8	2348		80	M27	8	360	
	250	—				100	M27	10	374	
	300	—				150	M33	12	748	
	400	—				200	M45	8	2348	
	200	M45	8	2348		250	M33	12	748	
	250	—				300	—			
	300	—				400	—			
	200	M45	8	2348		15	M20	4	88	
	250	—				25	M20	4	88	
	300	—				40	M20	8	82	
	400	—				50	M27	6	250	
	200	M45	8	2348		80	M27	8	360	
	250	—				100	M27	10	374	
	300	—				150	M33	12	748	
	400	—				200	M45	8	2348	
	200	M45	8	2348		250	M33	12	748	
	250	—				300	—			
	300	—				400	—			
	200	M45	8	2348		15	M20	4	88	
	250	—				25	M20	4	88	

PN	DN	Thread	Quantity	Tightening torque in Nm	Class	NPS	UNC thread	Quantity	Tightening torque in Nm
400	15	M20	4	108	2500	½	¾"-10	4	110
	25	M20	4	108		1	¾"-10	4	110
	40	M20	8	104		1½	¾"-10	8	106
	50	M27	6	312		2	1⅛"-7	6	352
	80	M27	10	360		3	1⅛"-7	10	398
	100	M30	10	520		4	1¼"-7	10	556
	150	M45	10	1528		6	1¾"-5	10	1524
	200		-			8	2½"-4	8	4568
	250	M48	16	2598		10	2½"-4	12	4662
	300		-			12	2¾"-4	16	5590

#### 2.2.4 Body gasket: cam-profile gasket · All body material · Bolts with Xylan® coating

PN	DN	Thread	Quantity	Tightening torque in Nm	Class	NPS	UNC thread	Quantity	Tightening torque in Nm
40	15	M12	4	16	300	½	See Class 600	8	280
	20	M12	4	16		¾			
	25	M12	4	16		1			
	32/ 40	M12	4	16		1½			
	50	M16	4	44		2			
	65	M16	6	44		-			
	80	M16	6	44		3			
	100	M16	6	56		4			
	125	M20	6	118		-			
	150	M20	8	104		6			
	200	M27	8	238		8	1"-8	8	280
	250	M24	16	162		10	⅝"-9	16	192
	300	M27	16	266		12	1"-8	16	314
	400	M36	16	578		16	1¾"-6	16	718
	500	M36	20	640		20	1¾"-6	20	806
63 to 100	See PN 160				600	½	⅝"-11	4	24
	200	M39	8	744		¾	⅝"-11	4	24
	250	M39	12	760		1	⅝"-11	4	24
	300	M39	16	844		1½	⅝"-11	5	38
	400	M45	16	1520		2	¾"-10	6	66
	500		-			3	¾"-10	8	94
						4	¾"-10	12	80
						6	1"-8	14	178
						8	1½"-6	8	804
						10	1½"-6	12	824
						12	1¾"-5	16	1072
						16	1¾"-5	16	1776
						20	2¼"-4.5	20	2464

## Tightening torques

PN	DN	Thread	Quantity	Tightening torque in Nm	Class	NPS	UNC thread	Quantity	Tightening torque in Nm	
160	15	M16	4	50	900	½	See Class 1500			
	25	M16	4	50		1				
	32	M16	5	58		–				
	40	M16	5	58		1½				
	50	M20	6	106		2				
	65	M20	8	150		–				
	80	M20	8	150		3	¾"-10	8	136	
	100	M20	12	128		4	¾"-10	12	120	
	125	M24	12	252		–	–	–	–	
	150	M24	14	258		6	1"-8	14	262	
	200	M39	8	1256		8	1½"-6	8	1188	
	250	M39	12	1294		10	1½"-6	12	1222	
	300	M39	16	1424		12	1¾"-5	16	1584	
	400	–				16	2¼"-4.5	16	2784	
	500	–				20	2¼"-4.5	20	3696	
250 to 320	15	M20	4	94	1500	½	¾"-10	4	72	
	25	M20	4	94		1	¾"-10	4	72	
	40	M20	8	88		1½	¾"-10	8	70	
	50	M27	6	268		2	1⅛"-7	6	228	
	80	M27	8	384		3	1⅛"-7	8	328	
	100	M27	10	400		4	1⅛"-7	10	340	
	150	M33	12	800		6	1¼"-7	12	598	
	200	M45	8	2504		8	2"-4.5	10	1942	
	250	–				10	2"-4.5	12	2456	
	300	–				12	2¼"-4.5	16	2962	
	400	–				16	2¾"-4	16	5966	
400	15	M20	4	116	2500	½	¾"-10	4	118	
	25	M20	4	116		1	¾"-10	4	118	
	40	M20	8	112		1½	¾"-10	8	114	
	50	M27	6	334		2	1⅛"-7	6	376	
	80	M27	10	384		3	1⅛"-7	10	424	
	100	M30	10	556		4	1¼"-7	10	594	
	150	M45	10	1632		6	1¾"-5	10	1626	
	200	–				8	2½"-4	8	4872	
	250	M48	16	2772		10	2½"-4	12	4974	
	300	–				16	2¾"-4	16	5962	

## 2.3 Tightening torques for connection of bellows seal and bellows seal bonnet

### 2.3.1 All body materials

PN	DN	Thread	Quantity	Tightening torque in Nm	Class	NPS	UNC thread	Quantity	Tightening torque in Nm	
16 to 40	15 to 40	M16	4	40	150 to 300	½ to 1½	⅝"-11	4	42	
	50 to 100	M16	6	38		2 to 4	⅝"-11	6	40	
	125	M20	6	72		5	¾"-10	6	70	
	150					6				
	200	M27	8	110		8	1"-8	8	108	
	250					10				
	300					12				
	400					16				
	500					20				
63 to 160	15 to 40	M16	4	80	600 to 900	½ to 1½	⅝"-11	4	80	
	50 to 100	M16	6	78		2 to 4	⅝"-11	6	76	
	125	M20	6	142		5	¾"-10	6	136	
	150					6				
	200	M27	8	222		8	1"-8	8	212	
	250					10				
	300					12				
	400					16				
	500					20				
250	15 to 40	M20	4	164	1500	½ to 1½	¾"-10	4	154	
	50 to 80	M20	6	156		2 to 3	¾"-10	6	148	
320 to 400	15 to 40	M20	4	188	2500	½ to 1½	¾"-10	4	178	
	50 to 80	M20	8	136		2 to 3	¾"-10	8	128	

### 2.3.2 Special version with large plug stem

PN	DN	d <sub>Kst</sub> in mm	Thread	Quantity	Tightening torque in Nm	Class	NPS	d <sub>Kst</sub> in mm	UNC thread	Quantity	Tightening torque in Nm	
160	25	16	16	4	62	600	½	16	⅝"-11	4	30	
	-						1½	16	⅝"-11	5	46	
	-						2	25	¾"-10	6	82	
	-						3	25	¾"-10	8	116	
	-						4	25	¾"-10	12	100	
	-						6	40	1"-8	14	222	
250	-					1500	4	25	1½"-7	10	424	
320 to 400	-					2500	2	25	¾"-10	8	100	
	80	25	20	6	120		3	25	1½"-7	6	180	

### 3 Lubricant

#### **⚠ WARNING**

*Damage to health after contact with hazardous substances.*

Certain lubricants (e.g. 8150-4008) are classified as hazardous substances. These substances have a special label and a material safety data sheet (MSDS) issued by the manufacturer.

- Make sure that an MSDS is available for any hazardous substance used. If necessary, contact the manufacturer to obtain an MSDS.
- Inform operating personnel about the hazardous substances and their correct handling.

#### 3.1 Recommended lubricant

Application	Quantity in g	Temperature range in °C	Color	Item no. of lubricant
Valves for oxygen service (free of oil and grease)	60	–60 to +250	White	8150-0116
Pneumatic devices (O-rings, guide bearings)	–	–40 to +260	White/transparent	8150-0100
Seat thread, stud bolts, spring compression	100	–180 to +1200	Gray	8150-4010
	250			8150-4008
Plug stem seal	10	–200 to +220	White	8150-4000
	60			8150-4007
	650			8150-0073

#### 3.2 Lubricant for adjustable packings

For valve materials EN-GJL-250 (EN-JL 1040), EN-GJS-400-18-LT (EN-JL 1049), 1.0619, 1.0402, 1.4571, and 1.4581

Packing form	Item no. of lubricant	Packing item number					
		DN 15 to 40 NPS ½ to 1½	DN 50 to 100 NPS 2 to 4	DN 125 to 150 NPS 5 to 6	DN 200 NPS 8	DN 250 NPS 10	DN 300 to 400 NPS 12 to 16
A	8150-0111	1120-1957	1120-1958	1120-1959	1120-1955	1120-1956	1120-1956
B		1120-1962	1120-1963	1120-1964	1120-1965 <sup>1)</sup>	1120-1966	1120-1966
Standard		1120-1952	1120-1953	1120-1954	1120-1955	1120-1956	1120-1956
H	Do not use any lubricant.	1120-1972	1120-1973	1120-1974	1120-1975	1120-1976	1120-1976

<sup>1)</sup> No V-ring packing

### 3.3 Lubricant sorted by parts and versions

Application	Seat	Plug	Stud bolt	Packing
Number within drawing (see section 1.5)	4	5	13	15
Series 250	8150-4008	8150-4000/ 8150-4007/ 8150-0073	8150-4008	8150-4000/ 8150-4007/ 8150-0073
Version for gas (DIN EN 161)	8150-4008	8150-4000/ 8150-4007/ 8150-0073	8150-4008	8150-4000/ 8150-4007/ 8150-0073
Version for oxygen service (cold box)	8150-0116	8150-0116	8150-0116	8150-0116
Application	Bolt (bellows seal)	Plug stem with metal bellows		
Number within drawing (see section 1.5)	32	37		
Series 250	8150-4008	8150-4008		
Version for gas (DIN EN 161)	8150-4008	8150-4008		
Version for oxygen service (cold box)	8150-0116	8150-0116		

## 4 Tools

### 4.1 Tools for assembly and disassembly

#### Packing tool

Valve size		Tool	Item no.	Photo
DN	NPS			
15 to 40	½ to 1½	Packing tool (12 mm plug stem diameter)	1280-3039	
50 to 100	2 to 4	Packing tool (16 mm plug stem diameter)	1280-3038	
125 to 150	5 to 6	Packing tool (25 mm plug stem diameter)	1280-3040	
200 and larger	8 and larger	Packing tool (40 mm plug stem diameter)	1280-3041	

#### Packing extractor

Valve size		Tool	Item no.	Photo
DN	NPS			
15 to 150	½ to 6	Packing extractor	1280-3037	
150 and larger	6 and larger	Packing extractor	1280-3035	
200 to 400	8 to 16	Packing extractor to pull out spacers out of the packing chamber	1280-3036	

#### Hook wrench for threaded bushing

Valve size		Tool	Item no.	Photo
DN	NPS			
Up to 200	Up to 8	Hook wrench to loosen and tighten the threaded bushing (packing nut)	1280-3000	

#### Tool for high-temperature packings

Valve size		Tool	Item no.	Photo
DN	NPS			
15 to 40	½ to 1½	Tool (modified threaded bushing), 12 mm plug stem diameter	1280-2007	
50 to 100	2 to 4	Tool (modified threaded bushing), 16 mm plug stem diameter	1280-2006	
125 to 150	5 to 6	Tool (modified threaded bushing), 25 mm plug stem diameter	1280-2008	
200 to 500	8 to 20	Tool (modified threaded bushing), 40 mm plug stem diameter	1280-2009	

## 4.2 Lifting equipment

Valve size		Tool	Item no.	Photo
DN	NPS			
15 to 40	½ to 1½	Sling for bonnet	1280-3032	
50 to 100	2 to 4	Sling for bonnet	1280-3033	
125 to 400	5 to 16	Sling for bonnet	1280-3034	
200 and larger	8 and larger	Ring nut to lift large plug with 40 mm plug stem diameter Connecting thread: M36 x 1.5	1280-3093	



## 1 Information on Type 3251 and Type 3256 Valves

### 1.1 Technical data for Type 3251

	Type 3251	
Photo		
Valve size	DIN	DN 15 to 500
	ANSI	NPS ½ to 20
Associated product documentation	Data sheet Mounting and operating instructions	► T 8051 (DIN) and ► T 8052 (ANSI) ► EB 8051 (DIN) and ► EB 8052 (ANSI)

### 1.2 Technical data for Type 3256

	Type 3256	
Photo		
Valve size	DIN	DN 15 to 500
	ANSI	NPS ½ to 20
Associated product documentation	Data sheet Mounting and operating instructions	► T 8065 (DIN) and ► T 8066 (ANSI) ► EB 8065 (DIN) and ► EB 8066 (ANSI)

### 1.3 Parts

Parts of the valve assembly are listed in the Parts section for Series 250 Valves.

## 2 Tools

### 2.1 Tools for standard version

#### 2.1.1 Seat wrenches

Valve size		Pressure rating	Item no.	Photo
DN	NPS			
15 to 25	½ to 1	–	0440-0065	
32 to 40	1¼ to 1½	–	1280-0110	
50	2	–	1280-0211	
65 to 80	2½ to 3	–	1280-0311	
100	4	–	1280-0411	
125	5	–	1280-3159	
150	6	–	1280-3157	
125 to 150	6	–	1280-3154	
200	8	PN 16 to 160 Class 150 to 900	1280-1000	
250	10	PN 16 to 160 Class 150 to 900	1280-1101	
300	12	PN 16 to 160 Class 150 to 900	1280-1200	
300	12	PN 250 to 400 Class 1500 to 2500	1280-1201	
350 to 400	14 to 16	PN 16 to 160	1280-1300	
400	16	PN 250 Class 1500	1280-1305	
500	20	PN 10 to 160	1280-1400	

## Special tools

The following tools are additionally required to install and remove the seat:

Valve size				
DN	NPS	Tool	Item no.	Photo
32 to 150	1½ to 6	Torque multiplier SX30, gear ratio 1:12.5, max. 3000 Nm	9932-3808	
125 and 150	6	Torque multiplier KWN8000 – Transmission ratio 1:40 – Max. 8000 Nm Torque multiplier BOLTMX MX80 – Transmission ratio 1:49 – Max. 8000 Nm	9932-3802	
32 to 50	1½ to 2	Torque wrench	9932-3812	
80 to 150	3 to 6	Torque wrench	9932-3814	
200 to 500	8 to 20	Hydraulic power tool	1280-1010	

### i Note

Both the torque multipliers KWN8000 and BOLTMX MX80 have the same item number. However, they have different gear ratios and spare shear pins. Therefore, always check which torque multiplier you are using.

## 2.1.2 Tools for guide bushing

Special tools are required to mount or remove guide bushings in standard valves:

### Disassembly tool

Valve size				
DN	NPS	Tool	Item no.	Photo
15 to 500	½ to 20	Disassembly tool	1280-4013	–

**Assembly tools**

Valve size		Tool	Item no.	Photo
DN	NPS			
15 to 40	½ to 1½	Assembly tool	1280-0608	
50 to 100	2 to 4	Assembly tool	1280-3063	
125 to 150	6	Assembly tool	1280-0612	
200 to 500	8 to 20	Assembly tool	1280-3102	
200 to 500 <sup>1)</sup>	8 to 20 <sup>1)</sup>	Assembly tool	1280-3103	

**Caulking tools**

Valve size		Tool	Item no.	Photo
DN	NPS			
15 to 40	½ to 1½	Caulking tool	1280-0609	
50 to 100	2 to 4	Caulking tool	1280-3064	
125 to 150	6	Caulking tool	1280-3146	

**2.2 Tools for version with insulating section or bellows seal****2.2.1 Tools for guide bushing**

Special tools are required to mount or remove guide bushings in valves with insulating section or bellows seal:

**Disassembly tool**

Valve size		Tool	Item no.	Photo
DN	NPS			
15 to 500	½ to 20	Disassembly tool	1280-4013	-

**Assembly tools for version with insulating section**

Valve size		Tool	Item no.	Photo
DN	NPS			
15 to 40	½ to 1½	Assembly tool	1280-0608	
50 to 100	2 to 4	Assembly tool	1280-3063	
125 to 150	6	Assembly tool	1280-0612	
200 to 500	8 to 20	Assembly tool	1280-3102	
200 to 500 <sup>1)</sup>	8 to 20 <sup>1)</sup>	Assembly tool	1280-3103	

### Caulking tools for version with insulating section

Valve size		Tool	Item no.	Photo
DN	NPS			
15 to 40	½ to 1½	Caulking tool	1280-0609	
50 to 100	2 to 4		1280-3064	
125 to 150	6		1280-3146	

### Assembly tools for version with bellows seal

Valve size		Tool	Item no.	Photo
DN	NPS			
125 to 150	6	Assembly tool	1280-3104	
125 to 150	6		1280-3106	
200 to 500	8 to 20		1280-3105	
200 to 500 <sup>1)</sup>	8 to 20 <sup>1)</sup>		1280-3107	

### Caulking tools for version with bellows seal



Valve size		Tool	Item no.	Photo
DN	NPS			
15 to 40	½ to 1½	Caulking tool	1280-3092	
50 to 100	2 to 4		1280-3090	

## 2.3 Tools for version with pressure balancing

Special wrench fittings and torque wrenches are required for Type 3251 Valves with pressure balancing with ring nut to install the ring nut. No special tools are required for valve versions with clamping rings.

### i Note

Contact SAMSON's After-sales Service department to find out which version is used in the valve (ring nut or clamping ring).

Valve size		Seat bore	Wrench fitting		Ring nut	Torque wrench	
DN	NPS		Item no.	Photo		Item no.	Photo
80	3		1280-6043		0250-1702		
100	4		1280-6044		0250-1704		
150	6		1280-6046		0250-1715		
200	8		1280-6045		0250-1791		
250	10		1280-2145		0250-2145		
300	12						
150 to 400	6 to 16						
200 to 300	8 to 12						

## 2.4 Tools for PSA valves

The Type 3256 Angle Valve is not available as a PSA valve.

### 2.4.1 Tools for guide bushing

Special tools are required to mount or remove guide bushings in PSA valves:

#### Disassembly tool

Valve size		Tool	Item no.	Photo
DN	NPS			
15 to 500	½ to 20	Disassembly tool	1280-4013	-

#### Assembly tools

Valve size		Tool	Item no.	Photo
DN	NPS			
15 to 40	½ to 1½	Assembly tool	1280-3153	-
125 to 150	6		1280-3152	

## 2.5 Tools for valves with AC trims

### 2.5.1 Seat wrenches for AC trims

Valve size		AC trim	Item no.	Photo
DN	NPS			
25	1	AC-3, AC-5	0440-0065	
32 to 40	1½	AC-3, AC-5	1280-0110	
50	2	AC-1, AC-2, AC-3, AC-5	1280-0211	
80	3	AC-1, AC-2, AC-3, AC-5	1280-0311	
100	4	AC-1, AC-2	0410-3028	
100	4	AC-3, AC-5	1280-0411	
150	6	AC-1, AC-2, AC-3, AC-5	1280-3154	-
200	8	AC-1, AC-2	1280-1005 1280-1010	

## Special tools

The following tools are additionally required to install and remove the seat with AC trims:

Valve size				
DN	NPS	Tool	Item no.	Photo
Up to 100	Up to 4	Torque multiplier SX30, gear ratio 1:12.5, max. 3000 Nm	9932-3808	
125 and 150	6	Torque multiplier KWN8000 – Transmission ratio 1:40 – Max. 8000 Nm Torque multiplier BOLTMX MX80 – Transmission ratio 1:49 – Max. 8000 Nm	9932-3802	
32 to 50	1 1/4 to 2	Torque wrench	9932-3812	
80 to 150	3 to 6	Torque wrench	9932-3814	
200 to 500	8 to 20	Hydraulic power tool	1280-1010	

### i Note

Both the torque multipliers KWN8000 and BOLTMX MX80 have the same item number. However, they have different gear ratios and spare shear pins. Therefore, always check which torque multiplier you are using.

## 2.5.2 Socket for AC trims

Valve size				
DN	NPS	Tool	Item no.	Photo
100	4	Socket for AC-1 and AC-2 trims for seat wrench (0410-3028)	0440-0069	
150	6	Special socket for AC-1, AC-2, AC-3, and AC-5 trims for seat wrench (1280-3157)	0440-0213	–
150	6	Special socket for AC-1, AC-2, AC-3, and AC-5 trims	0440-0259	–



## 1 Information on Type 3281 and Type 3286 Valves

### 1.1 Technical data for Type 3281

	Type 3281
Photo	 A vertical globe valve with a top-mounted pressure gauge and a lever-operated handle.
Form	Globe valve
Valve size	DIN DN 50 to 500 ANSI NPS 1 to 20
Associated product documentation	Data sheet ▶ T 8251 (DIN) and ▶ T 8252 (ANSI) Mounting and operating instructions ▶ EB 8251 (DIN) and ▶ EB 8252 (ANSI)

### 1.2 Technical data for Type 3286

	Type 3286
Photo	 An angle valve with a top-mounted pressure gauge and a lever-operated handle.
Form	Angle valve
Valve size	DIN DN 50 to 300 ANSI NPS 1 to 12
Associated product documentation	Data sheet ▶ T 8256 (DIN) and ▶ T 8257 (ANSI) Mounting and operating instructions ▶ EB 8256 (DIN) and ▶ EB 8257 (ANSI)

### 1.3 Parts

The Type 3281 and Type 3286 Steam Conditioning Valves are almost identical to a Type 3251 Globe Valve or Type 3256 Angle Valve fitted with a flow divider ST 3. A summary of the valve structure is available in the section on parts for Series 250 Valves.

## 2 Tools

### 2.1 Seat wrenches

Valve size		Pressure rating	Item no.	Photo
DN	NPS			
15 to 25	½ to 1	–	0440-0065	
32 to 40	1¼ to 1½	–	1280-0110	
50	2	–	1280-0211	
65 to 80	2½ to 3	–	1280-0311	
100	4	–	1280-0411	
125	5	–	1280-3159	
150	6	–	1280-3157	
125 to 150	6	–	1280-3154	
200	8	PN 16 to 160 Class 150 to 900	1280-1000	
250	10	PN 16 to 160 Class 150 to 900	1280-1101	
300	12	PN 16 to 160 Class 150 to 900	1280-1200	
300	12	PN 250 to 400 Class 1500 to 2500	1280-1201	
350 to 400	14 to 16	PN 16 to 160	1280-1300	
400	16	PN 250 Class 1500	1280-1305	
500	20	PN 10 to 160	1280-1400	

## Special tools

The following tools are additionally required to install and remove the seat:

Valve size				
DN	NPS	Tool	Item no.	Photo
32 to 150	1¼ to 6	Torque multiplier SX30, gear ratio 1:12.5, max. 3000 Nm	9932-3808	
125 and 150	6	Torque multiplier KWN8000 - Transmission ratio 1:40 - Max. 8000 Nm Torque multiplier BOLTMX MX80 - Transmission ratio 1:49 - Max. 8000 Nm	9932-3802	
32 to 50	1¼ to 2	Torque wrench	9932-3812	
80 to 150	3 to 6	Torque wrench	9932-3814	
200 to 500	8 to 20	Hydraulic power tool	1280-1010	

### i Note

Both the torque multipliers KWN8000 and BOLTMX MX80 have the same item number. However, they have different gear ratios and spare shear pins. Therefore, always check which torque multiplier you are using.




---

## 1 Information on Type 3321 Valve

### 1.1 Technical data

	Type 3321				
Photo					
Series	V2001				
Valve size	<table><tr><td>DIN</td><td>DN 15 to 100</td></tr><tr><td>ANSI</td><td>NPS ½ to 4</td></tr></table>	DIN	DN 15 to 100	ANSI	NPS ½ to 4
DIN	DN 15 to 100				
ANSI	NPS ½ to 4				
Associated product documentation	<table><tr><td>Data sheet</td><td><a href="#">► T 8111 (DIN)</a> and <a href="#">► T 8112 (ANSI)</a></td></tr><tr><td>Mounting and operating instructions</td><td><a href="#">► EB 8111/8112</a></td></tr></table>	Data sheet	<a href="#">► T 8111 (DIN)</a> and <a href="#">► T 8112 (ANSI)</a>	Mounting and operating instructions	<a href="#">► EB 8111/8112</a>
Data sheet	<a href="#">► T 8111 (DIN)</a> and <a href="#">► T 8112 (ANSI)</a>				
Mounting and operating instructions	<a href="#">► EB 8111/8112</a>				

## 1.2 Parts

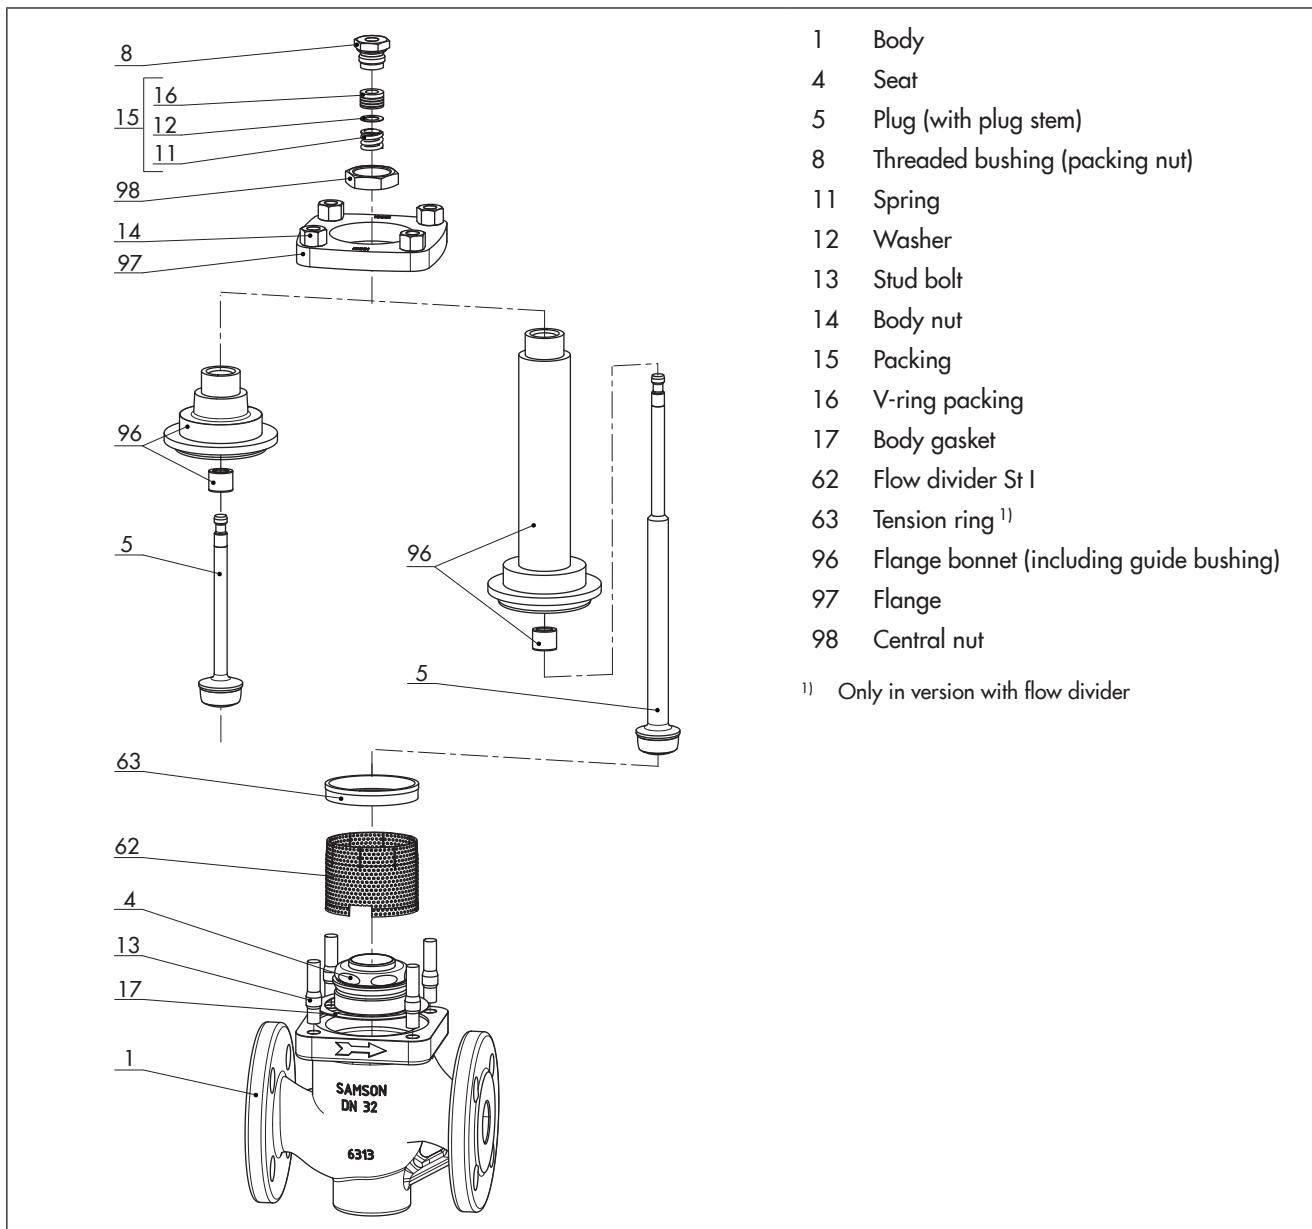

## 2 Tightening torques

### Note concerning the following specifications

- All tightening torques specified in Nm
- Tightening torque tolerance:  $\pm 10\%$
- The tightening torques are based on a friction coefficient of 0.06 with a lubricated seat thread and facing.
- After long operating times or long periods or use at temperatures above 250 °C, the breakaway torque may be twice as high as the tightening torque.

### 2.1 Tightening torques to install the seat

Number of seat within drawing: 4

Valve size			Seats made of 1.4006		Seats made of all other materials	
DN	NPS	Thread	Without torque multiplier	With torque multiplier <sup>1)</sup>	Without torque multiplier	With torque multiplier <sup>1)</sup>
15 to 25	1/2 to 1	M32 x 1.5	3 to 12 mm seat Ø: 120 24 mm seat Ø: 170	— <sup>2)</sup>	160	— <sup>2)</sup>
32 to 50	1½ to 2	M58 x 1.5	500	40	480	38
65 to 80	2½ to 3	M90 x 1.5 <sup>3)</sup>	1050	84	900	72
100	4	M110x1.5 <sup>3)</sup>	1550	124	1250	100

<sup>1)</sup> Torque multiplier with gear ratio 1:12.5

<sup>2)</sup> Only use a torque wrench to tighten the seat (do not use an additional torque multiplier).

<sup>3)</sup> The seat thread is not required when the body is made of stainless steel.

### Special tools

The following tools are additionally required to install and remove the seat:

Valve size		Tool	Item no.	Photo
DN	NPS			
32 to 100	1¼ to 4	Torque multiplier SX30, gear ratio 1:12.5, max. 3000 Nm	9932-3808	
32 to 50	1¼ to 2	Torque wrench	9932-3812	
80 to 100	3 to 4	Torque wrench	9932-3814	

### 2.2 Tightening torques for connection of body and bonnet

Valve size		Tightening torque for stud bolt (13) in Nm
DN	NPS	For standard version
15 to 25	1/2 to 1	30
32 to 50	1½ to 2	50
65 to 80	2½ to 3	100
100	4	150
DN	NPS	For version with insulating section
15 to 25	1/2 to 1	50
32 to 50	1½ to 2	50
65 to 80	2½ to 3	160
100	4	160

### 2.3 Tightening torques for threaded bushing

Valve size		Tightening torque for threaded bushing (8) in Nm
DN	NPS	
15 to 50	½ to 2	50
65 to 100	2½ to 4	80

### 2.4 Tightening torques for central nuts

Valve size		Tightening torque for central nut (98) in Nm
DN	NPS	
15 to 50	½ to 2	150

## 3 Lubricant

### ⚠ WARNING

Damage to health after contact with hazardous substances.

Certain lubricants (e.g. Gleitmo® 1763 V) are classified as hazardous substances. These substances have a special label and a material safety data sheet (MSDS) issued by the manufacturer.

- Make sure that an MSDS is available for any hazardous substance used. If necessary, contact the manufacturer to obtain an MSDS.
- Inform operating personnel about the hazardous substances and their correct handling.

### 3.1 Recommended lubricant

Application	Quantity in g	Temperature range in °C	Color	Item no.
Seat thread, stud bolts	250	-180 to +1200	Gray	8150-4008
Plug stem seal, packing, threaded bushing	10	-200 to +220	White	8150-4000
	60			8150-4007
	650			8150-0073

### 3.2 Lubricant sorted by parts and versions

Component	Seat	Plug and plug stem	Threaded bushing	Stud bolt	Body nut	Packing
Number within drawing (see section 1.2)	4	5	8	13	14	15
Lubricant	8150-4008	8150-4000/ 8150-4007/ 8150-0073	8150-4008	8150-4008	8150-4008	8150-4000/ 8150-4007/ 8150-0073

## 4 Tools

### 4.1 Seat wrenches

Valve size		Tool	Item no.	Photo
DN	NPS			
15 to 25	½ to 1	Seat wrench	1280-3030	
32 to 50	1¼ to 2	Seat wrench	1280-3009	
65 to 80	2½ to 3	Seat wrench	9110-2467	
100	4	Seat wrench	9110-2471	

### Special tools

The following tools are additionally required to install and remove the seat:

Valve size		Tool	Item no.	Photo
DN	NPS			
32 to 100	1¼ to 4	Torque multiplier SX30, gear ratio 1:12.5, max. 3000 Nm	9932-3808	
32 to 50	1¼ to 2	Torque wrench	9932-3812	
80 to 100	3 to 4	Torque wrench	9932-3814	

### 4.2 Packing extractor

Valve size		Tool	Item no.	Photo
DN	NPS			
15 to 100	½ to 4	Packing extractor	1280-3037	



## 1 Information on Type 3510 Valve

### 1.1 Technical data

	Type 3510	
Photo		
Valve size	DIN	DN 15 to 25
	ANSI	NPS ½ to 1
Associated product documentation	Data sheet Mounting and operating instructions	► T 8091 and ► T 8091-1 ► EB 8091 and ► EB 8091-1

### 1.2 Note on replacing the trim

#### Note


Different seat threads (M10 x 1 and M16 x 1) are assigned to the  $K_{VS}$  ranges 0.0001 to 0.4 and 0.63 to 1.6. Therefore, the trims are only interchangeable in the same valve size within the specified range.

#### NOTICE

Incorrect control due to a combination of trim parts that do not match each other.

The trim parts (seat, plug, anti-rotation fixture, and body gasket) are matched to exactly fit each other. The trim parts are delivered together and marked accordingly (see associated valve documentation ► EB 8091 or ► EB 8091-1). Only install matching trim parts.

## 1.3 Parts

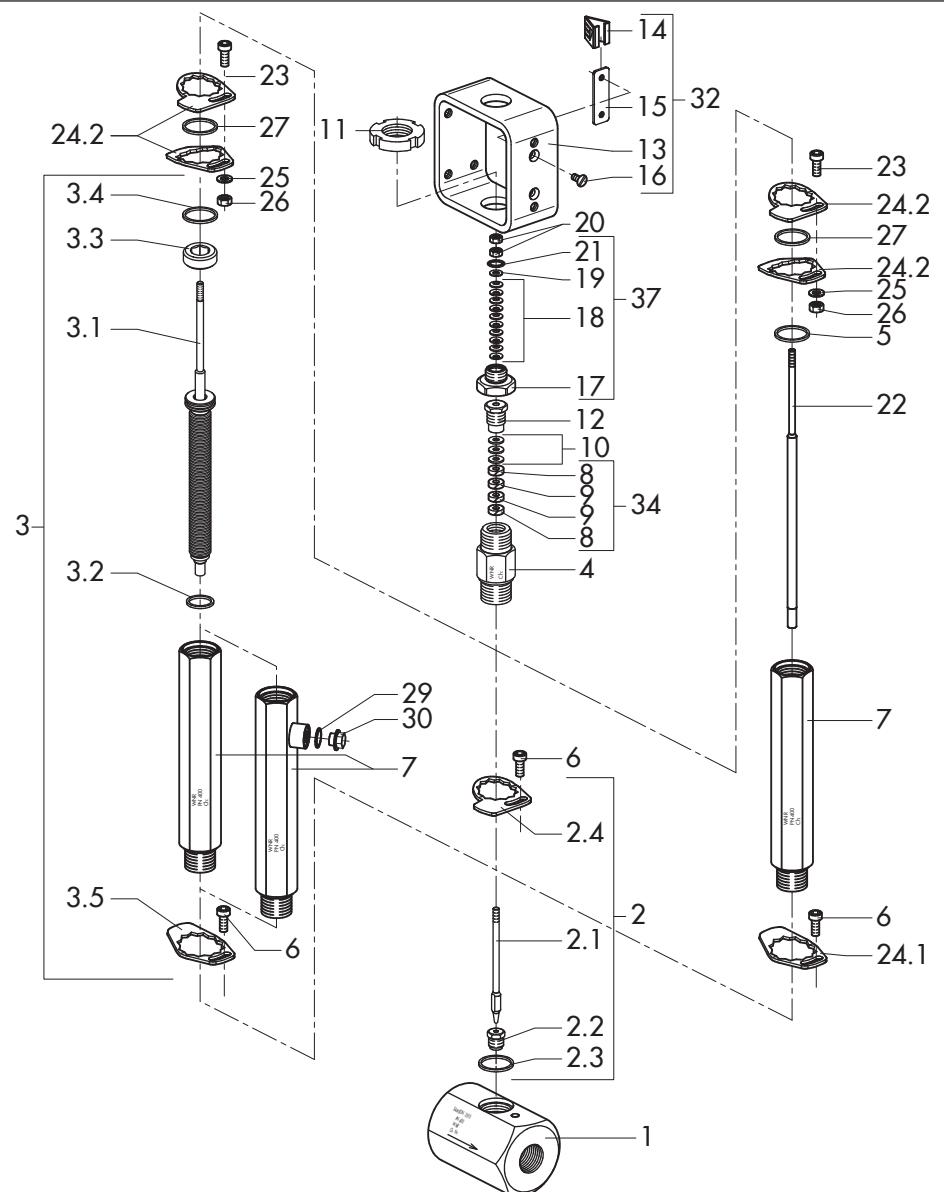

- |     |                              |    |                                 |      |                                             |
|-----|------------------------------|----|---------------------------------|------|---------------------------------------------|
| 1   | Body                         | 7  | Bellows seal/insulating section | 22   | Plug stem extension                         |
| 2   | Trim                         | 8  | Seal                            | 23   | Cap screw                                   |
| 2.1 | Plug with plug stem          | 9  | Seal                            | 24.1 | Bottom anti-rotation fixture                |
| 2.2 | Seat                         | 10 | Packing washer                  | 24.2 | Top anti-rotation fixture (two-piece)       |
| 2.3 | Body gasket                  | 11 | Slotted round nut               | 25   | Washer                                      |
| 2.4 | Anti-rotation fixture        | 12 | Threaded bushing (packing nut)  | 26   | Hexagon nut                                 |
| 3   | Bellows (assembly)           | 13 | Yoke                            | 27   | Washer                                      |
| 3.1 | Plug stem with bellows       | 14 | Travel indicator scale          | 29   | Seal for test connection                    |
| 3.2 | Seal                         | 15 | Retaining plate                 | 30   | Screw plug                                  |
| 3.3 | Bellows nut                  | 16 | Countersunk screw               | 32   | Yoke (ready mounted)                        |
| 3.4 | Seal (on intermediate piece) | 17 | Bearing sleeve                  | 34   | Packing                                     |
| 3.5 | Bottom anti-rotation fixture | 18 | Disk spring                     | 37   | Lower part of the stem connector (assembly) |
| 4   | Intermediate piece           | 19 | Packing washer                  |      |                                             |
| 5   | Seal                         | 20 | Hexagon nut                     |      |                                             |
| 6   | Cap screw                    | 21 | Snap ring                       |      |                                             |

## 2 Tightening torques

### Note concerning the following specifications

- All tightening torques specified in Nm
- Tightening torque tolerance:  $\pm 10\%$
- The tightening torques are based on a friction coefficient of 0.06 with a lubricated seat thread and facing.
- After long operating times or long periods or use at temperatures above 250 °C, the breakaway torque may be twice as high as the tightening torque.

### 2.1 Tightening torques to install the seat

Valve size		Tightening torque for seat (2.2) in Nm
DN	NPS	
15 to 25	½ to 1	20

### 2.2 Tightening torques for threaded bushing

Valve size		Tightening torque for threaded bushing (12) in Nm
DN	NPS	
15 to 25	½ to 1	4

### 2.3 Tightening torques for intermediate piece

Valve size		Tightening torque for intermediate piece (4) in Nm
DN	NPS	
15 to 25	½ to 1	120

### 2.4 Tightening torques for bottom slotted nut

Valve size		Tightening torque for bottom slotted nut (11) in Nm
DN	NPS	
15 to 25	½ to 1	100

### 2.5 Tightening torques for top slotted nut (ring nut)

#### i Note

The top slotted nut (ring nut) is used to attach the SAMSON Type 3271 or Type 3277 Actuator. This nut is not shown in the exploded diagram in section 1.3.

Valve size		Tightening torque for top slotted nut (ring nut) in Nm
DN	NPS	
15 to 25	½ to 1	100

### 2.6 Tightening torques for hex nuts on the tip of the plug stem

Valve size		Tightening torque for hex nuts (20) in Nm
DN	NPS	
15 to 25	½ to 1	7

**2.7 Tightening torques for bellows**

Valve size		Tightening torque for bellows (3) in Nm
DN	NPS	
15 to 25	½ to 1	90

**2.8 Tightening torques for bellows seal/insulating section on the body**

Valve size		Tightening torque for bellows seal/insulating section (7) in Nm
DN	NPS	
15 to 25	½ to 1	120

### 3 Lubricant

#### **⚠ WARNING**

Damage to health after contact with hazardous substances.

Certain lubricants (e.g. Gleitmo® 1763 V) are classified as hazardous substances. These substances have a special label and a material safety data sheet (MSDS) issued by the manufacturer.

- Make sure that an MSDS is available for any hazardous substance used. If necessary, contact the manufacturer to obtain an MSDS.
- Inform operating personnel about the hazardous substances and their correct handling.

#### 3.1 Recommended lubricant

Application	Quantity in g	Temperature range in °C	Color	Item no.
Valves for oxygen service (free of oil and grease)	60	-60 to +250	White	8150-0116
Plug stem seal	10	-200 to +220	White	8150-4000
	60			8150-4007
	650			8150-0073

#### 3.2 Lubricant sorted by parts

Application	Plug <sup>1)</sup>	Seat	Bellows	Intermediate piece
Number within drawing (see section 1.3)	2.1	2.2	3	4
Type 3510	8150-4000/ 8150-4007/ 8150-0073	8150-4000/ 8150-4007/ 8150-0073	8150-4000/ 8150-4007/ 8150-0073	8150-4000/ 8150-4007/ 8150-0073
Version for oxygen service (cold box)	8150-0116	8150-0116	8150-0116	8150-0116
Application	Bellows seal/insulating section	Packing	Threaded bushing	
Number within drawing (see section 1.3)	7	34	12	
Type 3510	8150-4000/ 8150-4007/ 8150-0073	8150-4000/ 8150-4007/ 8150-0073	8150-4000/ 8150-4007/ 8150-0073	
Version for oxygen service (cold box)	8150-0116	8150-0116	8150-0116	

<sup>1)</sup> Only for version with bellows seal/insulating section

## 4 Tools

### 4.1 Tool sets

Valve size				
DN	NPS	Tool	Item no.	Fig.
15 to 25	½ to 1	Tool kit for standard version of micro-flow valve	1280-3050	
15 to 25	½ to 1	Tool kit (discontinued) for low-temperature version of micro-flow valve	1280-3071	

### Special tools

The following tools are additionally required for installation or removal:

Valve size				
DN	NPS	Tool	Item no.	Fig.
15 to 25	½ to 1	Torque wrench	9932-3812	
15 to 25	½ to 1	Socket wrench <sup>1)</sup> Version with groove	9118-8425	-

<sup>1)</sup> Only required for old bellows seal version (manufactured until around 1998). The socket wrench (item no. 1280-3002) for new bellows seal versions (manufactured from 1998 onwards) is included in the tool kit for micro-flow valves.

## 1 Information on Type 3349 Valve

### 1.1 Technical data

	Type 3349	
Fig.		
Valve size (standard)	DIN	DN 15 to 50
	ANSI	NPS ½ to 2
Valve size (micro-flow valve)	DIN	DN 8 to 25
	ANSI	NPS ¼ to 1 (version for Type 3271/Type 3277) NPS ¾ to 1 (version for Type 3379)
Associated product documentation	Data sheet	► T 8048-2 ► T 8048-3
	Mounting and operating instructions	► EB 8048-2/-3

### 1.2 Note on Type 3349

The Type 3349 Angle Valve is designed for aseptic applications in the food and pharmaceutical industries according to DIN or ANSI standards. Special standards and regulators apply in these industries, which are essential for the correct and safe handling of products. Contact SAMSON's After-sales Service department if you have any questions.


### 1.3 Note on actuators

The Type 3349 Angle Valve can be combined with either a Type 3271, Type 3277 or Type 3379 Pneumatic Actuator. The valve construction differs depending on the version. Therefore, a difference is made in following based on the actuator mounted on the valve.


- Tightening torques, lubricants, and tools for the Type 3271 and Type 3277 Pneumatic Actuators are listed in the section on Type 3271 and Type 3277 Actuators in this document.
- Tightening torques, lubricants, and tools for the Type 3379 Pneumatic Actuator are listed in ► EB 8315.

## 1.4 Parts

Without packing

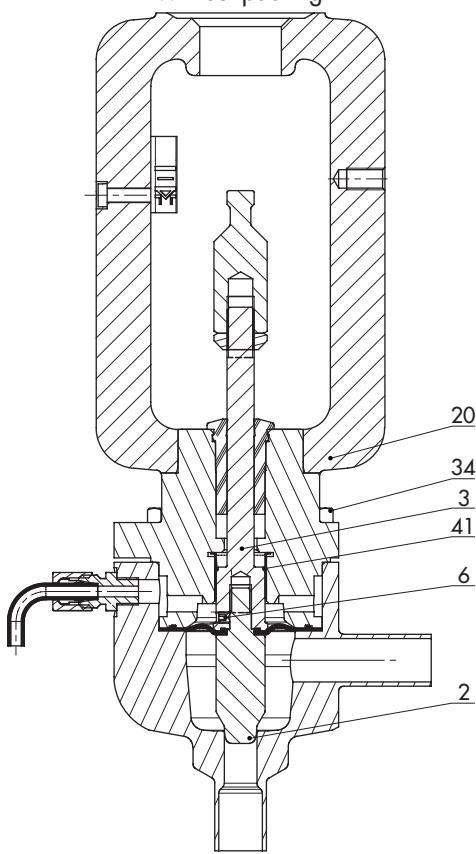


With packing

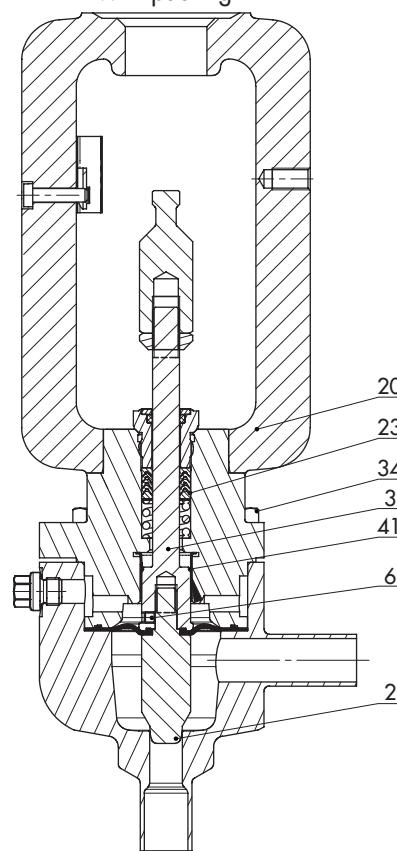


- 2 Plug
- 3 Plug stem
- 6 Threaded pin
- 20 Flange
- 23 Packing
- 34 Screw
- 41 Bearing

Parts of Type 3349 (version for Type 3271 and Type 3277 Pneumatic Actuators)

Without packing

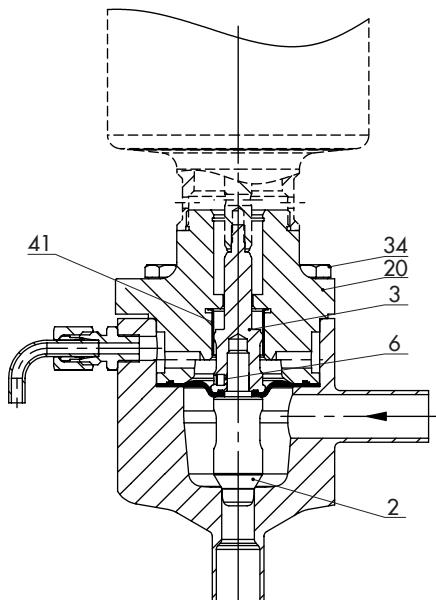

With packing

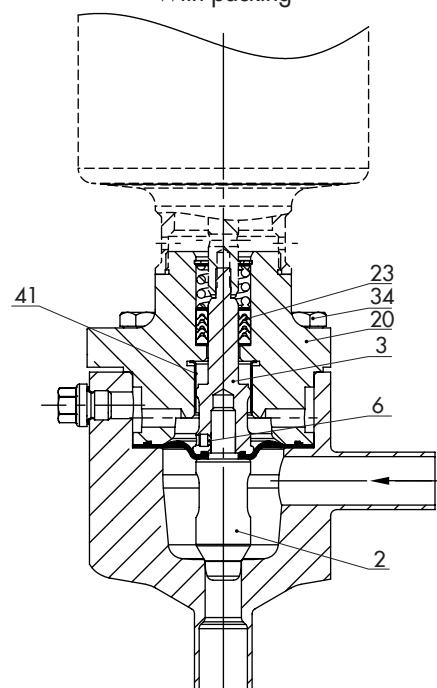

- 2 Plug
- 3 Plug stem
- 6 Threaded pin
- 20 Valve bonnet
- 23 Packing
- 34 Screw
- 41 Bearing

Parts of Type 3349 (version for Type 3379 Actuator)

## 2 Tightening torques

### 2.1 Tightening torques for Type 3349 with Type 3271 or Type 3277 Actuator

**i Note**

Tightening torques for the Type 3271 and Type 3277 Pneumatic Actuators are listed in the section on Type 3271 and Type 3277 Actuators in this document.

#### 2.1.1 Tightening torques for connection of plug and plug stem

Valve size		Tightening torque for plug (2) and plug stem (3) in Nm
DN	NPS	
8 to 25	1/4 to 1	4
15 to 25	1/2 to 1	16
32 to 65	1 1/4 to 2 1/2	135
80 and 100	3 and 4	200

#### 2.1.2 Tightening torques for connection of body and valve bonnet

**! NOTICE**

Risk of damage to the body screws due to excessively high tightening torques.

Older valve versions have body screws (34), which are no longer suitable for the specified tightening torques.

Make sure that the new screws are used for all versions. If necessary, contact SAMSON's After-sales Service department.

Valve size		Tightening torque for screw (34) in Nm
DN	NPS	
8 to 25	1/4 to 1	7
15 to 25	1/2 to 1	16
32 to 65	1 1/4 to 2 1/2	40
80 and 100	3 and 4	135

### 2.2 Tightening torques for Type 3349 with Type 3379 Actuator

#### 2.2.1 Tightening torques for connection of plug and plug stem

Valve size		Tightening torque for plug (2)/plug stem (3) in Nm
DN	NPS	
8 to 25	3/8 to 1	4
15 to 25	1/2 to 1	16
32 to 50	1 1/4 to 2	135

## 2.2.2 Tightening torques for connection of body and valve bonnet

Valve size		Tightening torque for screw (34) in Nm
DN	NPS	
8 to 25	3/8 to 1	7
15 to 25	1/2 to 1	16
32 to 50	1 1/4 to 2	40

## 2.2.3 Tightening torques for connection of actuator stem and plug stem

Valve size		Tightening torque for actuator stem and plug stem (3) in Nm
DN	NPS	
8 to 50	1/4 to 2	4

## 3 Lubricant

### ⚠ WARNING

Damage to health after contact with hazardous substances.

Certain lubricants (e.g. 8150-4008) are classified as hazardous substances. These substances have a special label and a material safety data sheet (MSDS) issued by the manufacturer.

- Make sure that an MSDS is available for any hazardous substance used. If necessary, contact the manufacturer to obtain an MSDS.
- Inform operating personnel about the hazardous substances and their correct handling.


### 3.1 Recommended lubricant

Application	Temperature range in °C	Color	Item no. of lubricant
Valves for food processing	-50 to +150	White	8150-9002

### 3.2 Lubricant sorted by parts and versions

Application	Plug	Plug stem	Threaded pin	Bearing
Number within drawing (see section 1.4)	2	3	6	41
Standard version	8150-9002	8150-9002	8150-9002	8150-9002
Micro-flow valve version	8150-9002	8150-9002	–	8150-9002
Application	Packing	Flange/valve bonnet	Screw	
Number within drawing (see section 1.4)	23	20	34	
Standard version	8150-9002	8150-9002	–	
Micro-flow valve version	8150-9002	–	–	

## 4 Tools

Valve size		Tool	Connections		Item no.	Photo
DN	NPS					
8 to 25	1/4 to 1	Set of tools consisting of clamping rings to clamp the plug stem in a vise	–	–	1281-0035	
15 to 25	1/2 to 1		–	–		
32 to 50	1 1/4 to 2		–	–		
32 to 65	1 1/4 to 2 1/2	Special wrench for plug stem	1/2"	■	1281-0092	
80 and 100	3 and 4	Special wrench for plug stem	1/2"	■	1281-0093	

### Special tools

The following tools are additionally required to mount the plug:

Valve size		Tool	Reference <sup>1)</sup>
DN	NPS		
32 to 100	1 1/4 to 4	ISI torque wrench, 20 to 100 Nm	3345-2

<sup>1)</sup> ISI order number (not a SAMSON item no.)



## 1 Information on Type 3271 and Type 3277 Actuators

### 1.1 Technical data for Type 3271

	Type 3271
Photo	
Actuator areas cm <sup>2</sup>	60, 80, 120, 175, 240, 350, 355, 700, 750, 1000, 1400-60, 1400-120, 1400-250, 2800, 2 x 2800
Travel mm	7.5 to 250
Associated product documentation Data sheets	► T 8310-1, ► T 8310-2, ► T 8310-3, ► T 8310-8
Associated product documentation Mounting and operating instructions	► EB 8310-X

### 1.2 Technical data for Type 3277

	Type 3277
Photo	
Actuator area cm <sup>2</sup>	120, 175, 240, 350, 355, 700, 750
Travel mm	7.5 to 60
Associated product documentation Data sheet	► T 8310-1
Associated product documentation Mounting and operating instructions	► EB 8310-X

### 1.3 Note on actuators with preloaded springs


#### **! WARNING**

Risk of personal injury due to preloaded springs.

Valves in combination with pneumatic actuators with preloaded springs are under tension. These control valves with SAMSON pneumatic actuators can be identified by the long bolts protruding from the bottom of the actuator. Additionally, these actuators are marked by an adhesive label.

Before starting any work on the actuator, relieve the compression from the preloaded springs (see associated actuator documentation).

## 1.4 Parts

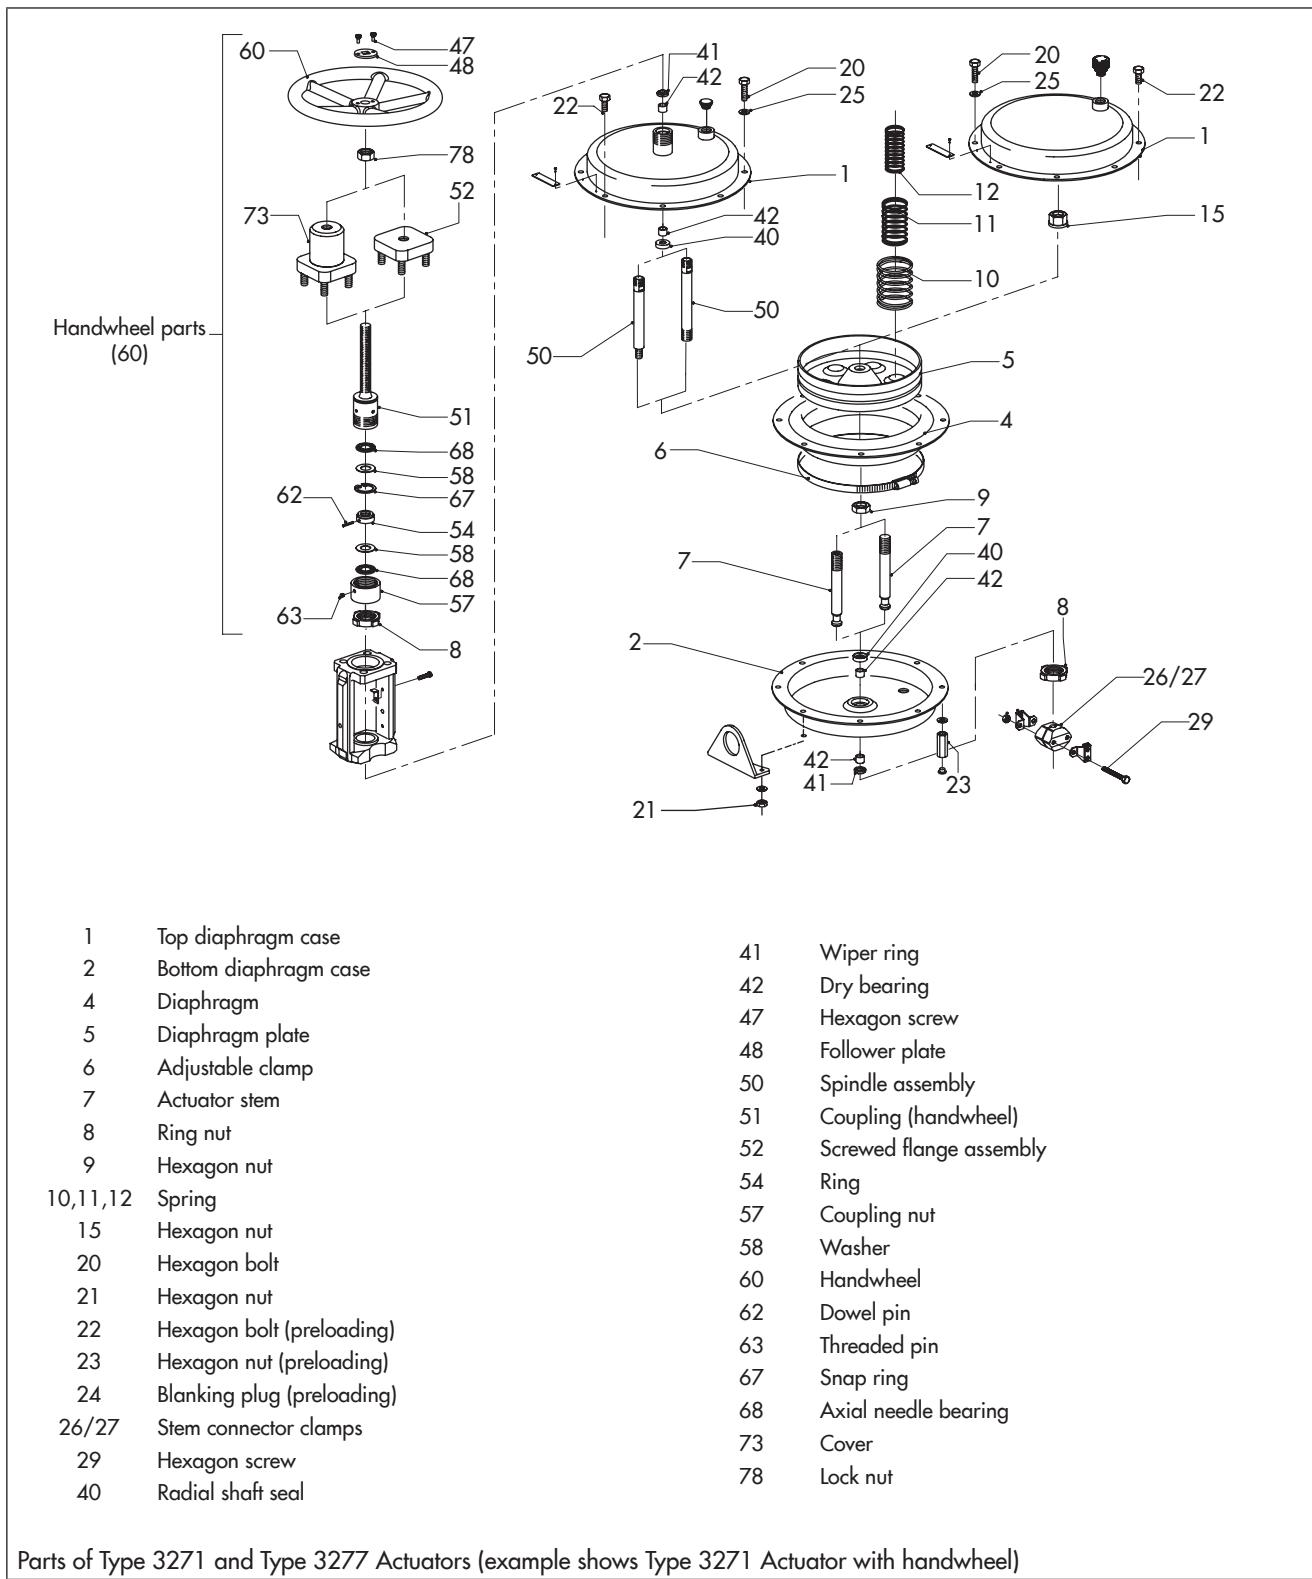

Parts of Type 3271 and Type 3277 Actuators (example shows Type 3271 Actuator with handwheel)

### Note

Actuators with other actuator areas are listed at ► [www.samson.de](http://www.samson.de) > Product documentation.

## 2 Tightening torques

### 2.1 Tightening torques for nuts to connect the top and bottom diaphragm cases

Actuator area in cm <sup>2</sup>	Tightening torque for nuts (21) in Nm
120	8
175	15
240	15
350, 355	15
700	20
750	30
1000	35
1400-60	30
1400-120	15 to 20
1400-250	30
2800	50

### 2.2 Tightening torques for nuts to connect the top and bottom diaphragm cases when the actuator springs are compressed

Actuator area in cm <sup>2</sup>	Tightening torque for nuts (23) in Nm
175	15
240	15
350, 355	15
700	20
750	25
1000	35
1400-60	30
1400-120	60
1400-250	50
2800, 2 x 2800	50

### 2.3 Tightening torques for ring nut

Actuator area in cm <sup>2</sup>	Thread	Tightening torque for ring nut (8) in Nm
120, 175 (for micro-flow valve)	M20x1.5	100
120 to 750	M30 x 1.5	150
1000	M60 x 1.5	–
1400-60	M60 x 1.5	–
1400-120	M100 x 2	–
1400-250	M100 x 2	–
2800	M100 x 2	–

### Special tools

The following tools are additionally required to tighten the ring nut (8) of actuators with 750 cm<sup>2</sup> and smaller:

Nm	Connections	Tool	Item no.	Photo
60 to 320	14x18 mm	□	Interchangeable head torque wrench	9932-2238
110	-	-	Slotted nut wrench for torque wrench in 120 cm <sup>2</sup> version for micro-flow valve	1280-3015
150	-	-	Castellated nut wrench for torque wrench	1280-3118

### 2.4 Tightening torques for collar nut

Actuator area in cm <sup>2</sup>	Tightening torque for collar nut (15 or 83 <sup>1)</sup> ) in Nm
175	-
240	35
350, 355, 700, 750, 1000	160
2800, 2 x 2800	600

<sup>1)</sup> 83 only applies to 2800 and 2 x 2800 cm<sup>2</sup> actuators

### 2.5 Tightening torques for retaining nut

Actuator area in cm <sup>2</sup>	Tightening torques for retaining nut (82) in Nm
1400-60	260
1400-120	250
1400-250 <sup>1)</sup>	250

<sup>1)</sup> For "stem retracts" direction of action: 82; for "stem extends" direction of action: 174

### 2.6 Tightening torques for nut on compressor

Actuator area in cm <sup>2</sup>	Tightening torque for nut (92) in Nm
1000	200

### 2.7 Tightening torques for adjustable clamp

Actuator area in cm <sup>2</sup>	Tightening torque for adjustable clamp (6) in Nm
240, 350, 700	6
1400-60	Connection between two adjustable clamps: 3 Nm
	Clamp lock of the adjustable clamps: 8 Nm

#### **! NOTICE**

Risk of property damage and malfunction due to incorrect mounting of the adjustable clamp.

The clamp lock must be fastened between the two fastening bolts on the top and bottom diaphragm case. Observe instructions in the associated actuator documentation.

**i Note**

- After performing any repair or maintenance work on the actuator, renew the adjustable clamp.
- Actuators with 120, 175, 355, 750, 1000, and 2800 cm<sup>2</sup> actuator areas do not have an adjustable clamp.
- Versions of the 1400 cm<sup>2</sup> actuator exist with and without adjustable clamp. Therefore, it is important to always specify the actuators's configuration ID or the SAMSON order number (including position within the order) when ordering spare parts, for repairs, and after-sales inquiries. These data include information on which version is used.

**Special tools**

The following tools are additionally required to tighten the adjustable clamp (6):

Size/Nm	Tool	Connections		Item no.	Photo
2 to 10 Nm	Torque wrench with scale	1/4"	■	9932-3811	
	1/4" extension			9932-3228	
	1/4" socket			9932-3302	

**2.8 Tightening torques for rod of anti-rotation fixture**

Actuator area in cm <sup>2</sup>	Tightening torque for rod of anti-rotation fixture (88) in Nm
1400-120	30
1400-250	30

**2.9 Tightening torques for stem connector clamps**

Plug stem diameter	Thread size	Tightening torque for stem connector clamps (26/27) in Nm
10	M5	5
16	M6	9
22	M12	75 ( $\pm 5$ )
40	M16	140 ( $\pm 5$ )

### 3 Lubricant

#### **⚠ WARNING**

*Damage to health after contact with hazardous substances.*

Certain lubricants (e.g. 8150-4008) are classified as hazardous substances. These substances have a special label and a material safety data sheet (MSDS) issued by the manufacturer.

- Make sure that an MSDS is available for any hazardous substance used. If necessary, contact the manufacturer to obtain an MSDS.
- Inform operating personnel about the hazardous substances and their correct handling.

#### 3.1 Recommended lubricant

Application	Gasket material and operating medium	Quantity in g	Temperature range in °C	Color	Item no. of lubricant
Mechanical bearings in the actuators (version for water) Valve lubricant	NBR: water	100	-20 to +160	Light brown	8150-4032
Points of support and threaded spindle in actuators	NBR: air	100	-30 to +130	Black	8152-1002
		400			8152-1001
Mechanical bearings in Type 3271 Actuators	–	–	Up to +200	Red	8150-0012
Screws (stainless steel)	–	–	Up to +200	White/gray	8150-0085
Valves for oxygen service (free of oil and grease)	EPDM/PVMQ: air EPDM: oxygen	60	-60 to +250	White	8150-0116
Spring compression	–	250	-180 to +1200	Gray	8150-4008
2800 and 2 x 2800 cm <sup>2</sup> actuators	–	400	Up to +200 °C	Red	8150-0012

#### 3.2 Lubricant sorted by parts and versions

Application	Thread on the bottom diaphragm case	Actuator stem	Hexagon bolt	Dry bearing	Hexagon nut (actuator stem)	Handwheel parts	
Number within drawing (see section 1.4)	2	7	20/22	42	15	60	
Type 3271	8150-4008	8152-1002/ 8152-1001	8150-0085	8152-1002/ 8152-1001	8152-1002/ 8152-1001	8152-1002/ 8152-1001	
Type 3277	8150-4008	8152-1002/ 8152-1001	8150-0085	8152-1002/ 8152-1001	8152-1002/ 8152-1001	8152-1002/ 8152-1001	
Version for oxygen service (cold box)	8150-0116	8150-0116	8150-0116	8150-0116	8150-0116	8150-0116	
Application	Radial shaft seal	Wiper ring	Dry bearing <sup>1)</sup>				
Number within drawing (see section 1.4)	40	41	126, 187				
Type 3271	8152-1002/ 8152-1001	8152-1002/ 8152-1001	8152-1002/ 8152-1001				
Type 3277	8152-1002/ 8152-1001	8152-1002/ 8152-1001	–				
Version for oxygen service (cold box)	8150-0116	8150-0116	8150-0116				

<sup>1)</sup> Type 3271 with 1400-250 cm<sup>2</sup> actuator area only

### 3.3 Sealant

Application	Item no.
Between top diaphragm case (1) and intermediate ring (180) <sup>1)</sup>	8121-4005

<sup>1)</sup> Type 3271 with 1400-250 cm<sup>2</sup> actuator area only

## 4 Tools

### 4.1 Type 3271 and Type 3277, 60 to 120 cm<sup>2</sup> actuator areas

Actuator area	Tool description	Item no.	Photo
60 to 120 cm <sup>2</sup>	Mandrel for wiper (41)	1280-3023	
	Mandrel for radial shaft seal (40)	1280-3061 (1280-3024)	
	Mandrel for dry bearing (42)	1280-3025	
60 to 120 cm <sup>2</sup>	Punch	1280-3084	
60 to 120 cm <sup>2</sup>	Gripping device for lifting	1280-3094	
60 to 120 cm <sup>2</sup>	Travel adjusting gauge	1280-2001	

### 4.2 Type 3271 and Type 3277, 175 cm<sup>2</sup> actuator area

Actuator area	Tool description	Item no.	Photo
175 cm <sup>2</sup>	Mandrel for wiper (41)	1280-3023	
	Mandrel for radial shaft seal (40)	1280-3061 (1280-3024)	
	Mandrel for dry bearing (42)	1280-3025	
175 cm <sup>2</sup>	Punch	1280-3084	
175 cm <sup>2</sup>	Gripping device for lifting	1280-3072	

Actuator area	Tool description	Item no.	Photo
175 cm <sup>2</sup>	Travel adjusting gauge	1280-2001	

#### 4.3 Type 3271 and Type 3277, 240 cm<sup>2</sup> actuator area

Actuator area	Tool description	Item no.	Photo
240 cm <sup>2</sup> (Type 3271 only)	Mandrel for wiper (41)	1280-3023	
	Mandrel for radial shaft seal (40)	1280-3061 (1280-3024)	
	Mandrel for dry bearing (42)	1280-3025	
240 cm <sup>2</sup> (Type 3277 only)	Mandrel for wiper (41)	1280-3020	
	Mandrel for radial shaft seal (40)	1280-3021	
	Mandrel for dry bearing (42)	1280-3022	
240 cm <sup>2</sup>	Punch	1280-3084	
240 cm <sup>2</sup>	Gripping device for lifting	1280-3072	
240 cm <sup>2</sup>	Travel adjusting gauge	1280-2001	

#### 4.4 Type 3271 and Type 3277, 350 and 355 cm<sup>2</sup> actuator areas

Actuator area	Tool description	Item no.	Photo
350/355 cm <sup>2</sup>	Mandrel for wiper (41)	1280-3020	
	Mandrel for radial shaft seal (40)	1280-3021	
	Mandrel for dry bearing (42)	1280-3022	
355 cm <sup>2</sup>	Mandrel for radial shaft seal (40) Special version for actuator with travel stop	1280-3169	
	Mandrel for dry bearing (42) Special version for actuator with travel stop	1280-3170	
350/355 cm <sup>2</sup>	O-ring sleeve, for actuators with travel stop on both sides (to protect the O-ring from chafing while being mounted)	1280-3198	

Actuator area	Tool description	Item no.	Photo
350/355 cm <sup>2</sup>	Punch	1280-3084	
350/355 cm <sup>2</sup>	Gripping device for lifting	1280-3072	
350/355 cm <sup>2</sup>	Travel adjusting gauge	1280-2001	

#### 4.5 Type 3271 and Type 3277, 700 and 750 cm<sup>2</sup> actuator areas

Actuator area	Tool description	Item no.	Photo
700/750 cm <sup>2</sup>	Mandrel for wiper (41)	1280-3020	
	Mandrel for radial shaft seal (40)	1280-3021	
	Mandrel for dry bearing (42)	1280-3022	
700 cm <sup>2</sup>	O-ring sleeve, for actuators with travel stop on both sides (to protect the O-ring from chafing while being mounted)	1280-3206	
750 cm <sup>2</sup>	O-ring sleeve (to protect the O-ring from chafing while being mounted)	1280-3198	
750 cm <sup>2</sup>	Wrench for slotted nut, SW 24, for actuators with travel stop	1280-3197	
700/750 cm <sup>2</sup>	Punch	1280-3084	
750 cm <sup>2</sup>	Swivel lifting hook for lifting the actuator and setting it upright	8442-1017	

Actuator area	Tool description	Item no.	Photo
750 cm <sup>2</sup>	Eyebolt to vertically lift the actuator Thread: M16 Increased height compared to the version without lifting eyelet (measured from top of the diaphragm case): 32 mm <sup>1)</sup>	8325-0131	
700/750 cm <sup>2</sup>	Travel adjusting gauge	1280-2001	

**Special tools**

The following tools are additionally required:

Size/Nm	Tool	Connections		Item no.	Photo
60 to 320 Nm	Torque wrench with scale	14x18 mm	<input type="checkbox"/>	9932-2238	
	Open-end wrench	14x18 mm	SW 32 mm	9932-3371	

**4.6 Type 3271, 1000 cm<sup>2</sup> actuator area**

Actuator area	Tool description	Item no.	Photo
1000 cm <sup>2</sup>	Mandrel for wiper (41)	1280-3077	
	Mandrel for radial shaft seal (40)	1280-3075	
1000 cm <sup>2</sup>	Socket wrench SW 24 (actuator stem extends)	1280-3181	
	Socket wrench SW 24 (actuator stem retracts)	1280-3199	
	Socket wrench SW 36	1280-3182	
1000 cm <sup>2</sup>	Punch	1280-3083	
1000 cm <sup>2</sup>	Swivel lifting hook for lifting the actuator and setting it upright	8442-1018	

Actuator area	Tool description	Item no.	Photo
1000 cm <sup>2</sup>	Eyebolt to vertically lift the actuator Thread: M24 Increased height compared to the version without lifting eyelet (measured from top of the diaphragm case): 46 mm <sup>1)</sup>	8325-0135	
1000 cm <sup>2</sup>	Travel adjusting gauge	1280-2001	

### Special tools

The following tools are additionally required:

Size/Nm	Tool	Connections		Item no.	Photo
60 to 320 Nm	Torque wrench with scale	14x18 mm		9932-2238	
	Open-end wrench	14x18 mm	SW 32 mm	9932-3371	


### 4.7 Type 3271, 1400 cm<sup>2</sup> actuator area

Actuator area	Tool description	Item no.	Photo
1400-60 cm <sup>2</sup>	Mandrel for wiper (41)	1280-3077	
	Mandrel for radial shaft seal (40)	1280-3075	
1400-120 cm <sup>2</sup> 1400-250 cm <sup>2</sup>	Mandrel for wiper (41)	1280-3076	
	Mandrel for radial shaft seal (40)	1280-3078	
1400 cm <sup>2</sup>	Mandrel for 1400 cm <sup>2</sup> actuators with travel stop on both sides	1280-3205	
1400-60 cm <sup>2</sup>	Punch for dry bearing (42)	1280-3084	
1400-120 cm <sup>2</sup> 1400-250 cm <sup>2</sup>	Punch for dry bearing (42, 187 <sup>1)</sup> )	1280-3082	
1400-250 cm <sup>2</sup>	Punch for dry bearing (126)	1280-3083	
1400 cm <sup>2</sup>	Punch for 1400 cm <sup>2</sup> actuators with travel stop on both sides	1280-3204	

Actuator area	Tool description	Item no.	Photo
1400-120 cm <sup>2</sup> 1400-250 cm <sup>2</sup>	Swivel lifting hook for lifting the actuator and setting it upright	8442-1019	
1400-120 cm <sup>2</sup> 1400-250 cm <sup>2</sup>	Eyebolt to vertically lift the actuator Increased height compared to the version without lifting eyelet (measured from top of the diaphragm case): 90 mm	8325-1101	
1400 cm <sup>2</sup>	Travel adjusting gauge	1280-2001	

<sup>1)</sup> Type 3271 with 1400-250 cm<sup>2</sup> actuator area only

#### 4.8 Type 3271, 2800 and 2 x 2800 cm<sup>2</sup> actuator areas

Actuator area	Tool description	Item no.	Photo
2800/2 x 2800 cm <sup>2</sup>	Tool set Facilitates diaphragm replacement and reversal of the fail-safe action	1280-4010	–
2800 cm <sup>2</sup>	Mandrel for wiper (41)	1280-3076	
	Mandrel for radial shaft seal (40)	1280-3078	
2800 cm <sup>2</sup>	Punch	1280-3082	
2800/2 x 2800 cm <sup>2</sup>	Swivel lifting hook for lifting the actuator and setting it upright	8442-1019	
2800/2 x 2800 cm <sup>2</sup>	Eyebolt to vertically lift the actuator Thread: M38 Increased height compared to the version without lifting eyelet (measured from top of the diaphragm case): 65 mm <sup>1)</sup>	8325-1101	
2800/2 x 2800 cm <sup>2</sup>	Travel adjusting gauge	1280-2001	

## 1 Information on Type 3371 and Type 3372 Actuators

### 1.1 Technical data for Type 3371

	Type 3371	
Photo		
Actuator area	cm <sup>2</sup>	120      350
Associated product documentation	Data sheet Mounting and operating instructions	▶ T 8317 ▶ EB 8317

### 1.2 Technical data for Type 3372

	Type 3372	
Photo		
Actuator area	cm <sup>2</sup>	120      350
Associated product documentation	Data sheet Mounting and operating instructions	▶ T 8313 ▶ EB 8313-1 (with integral positioner) ▶ EB 8313-3 (with directly attached positioner)

### 1.3 Note on versions of Type 3372

#### **i Note**

The Type 3372 Pneumatic Actuator is available in different versions:

- Type 3372 with 120 cm<sup>2</sup> actuator area and integral positioner
- Type 3372 with 120 or 350 cm<sup>2</sup> actuator area and Type 3725 Positioner (direct attachment)

### 1.4 Note on actuators with preloaded springs


#### **⚠ WARNING**


Risk of personal injury due to preloaded springs.

Valves in combination with pneumatic actuators with preloaded springs are under tension. These control valves with SAMSON pneumatic actuators can be identified by the long bolts protruding from the bottom of the actuator. Additionally, these actuators are marked by an adhesive label.

Before starting any work on the actuator, relieve the compression from the preloaded springs (see associated actuator documentation).

## 1.5 Parts

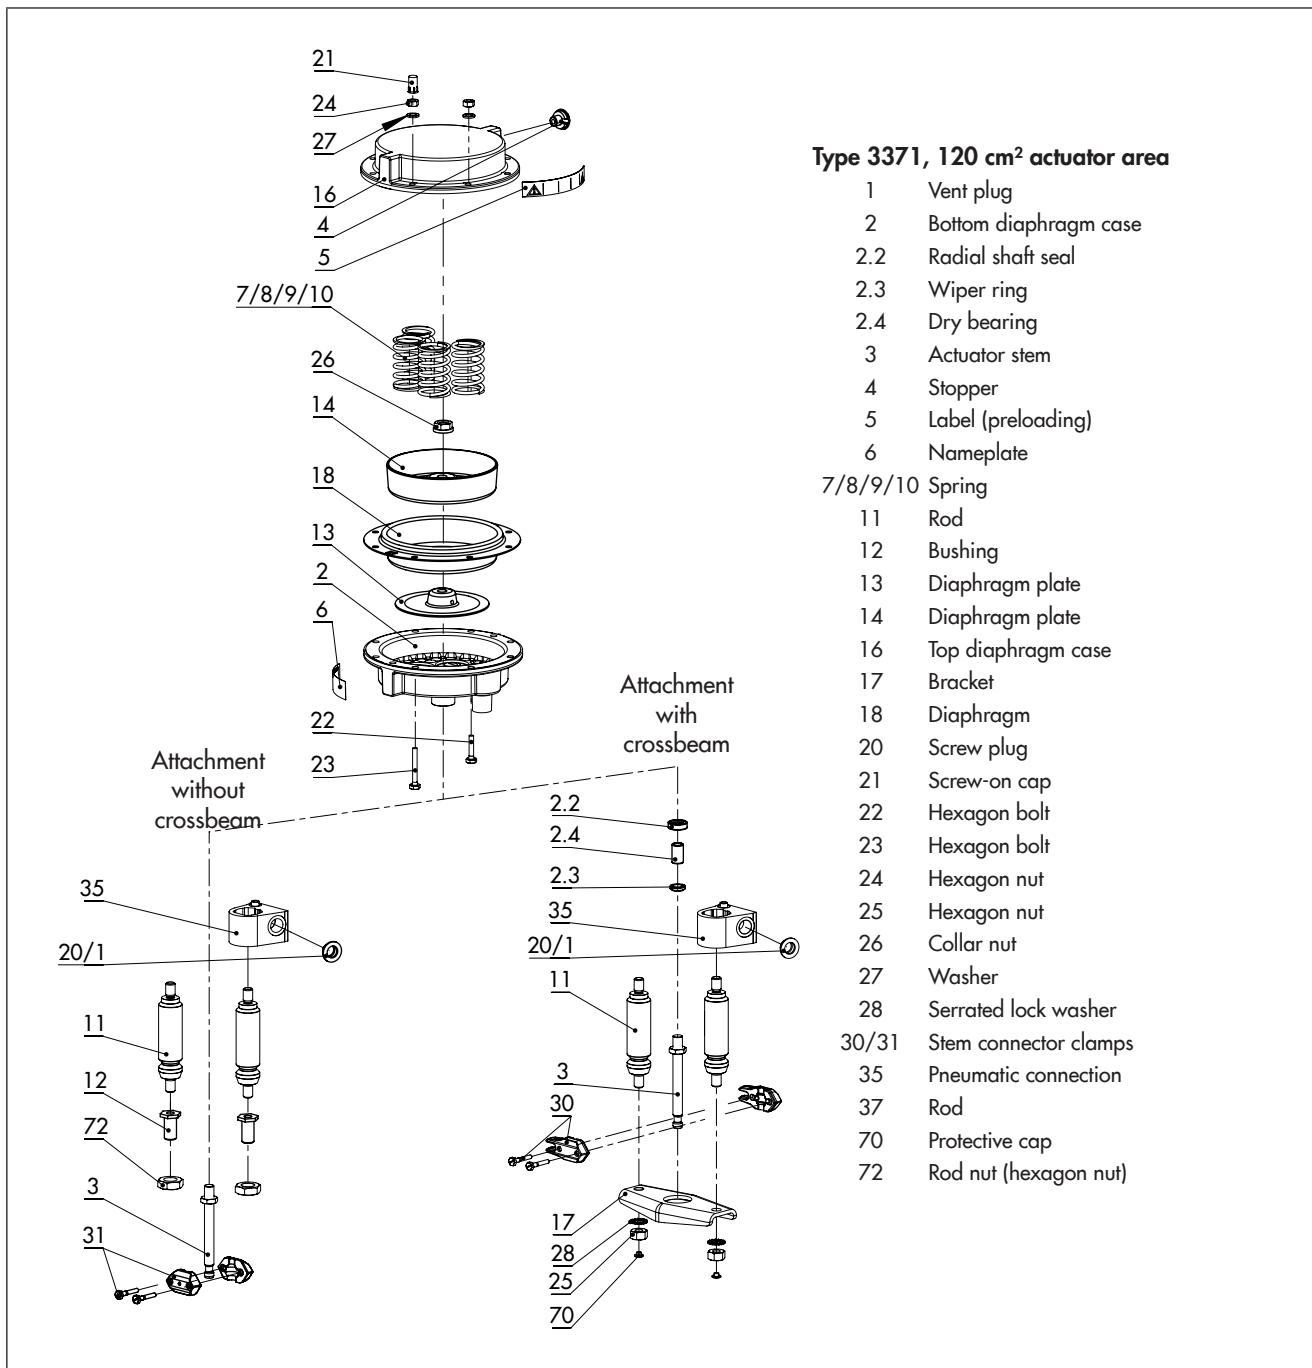

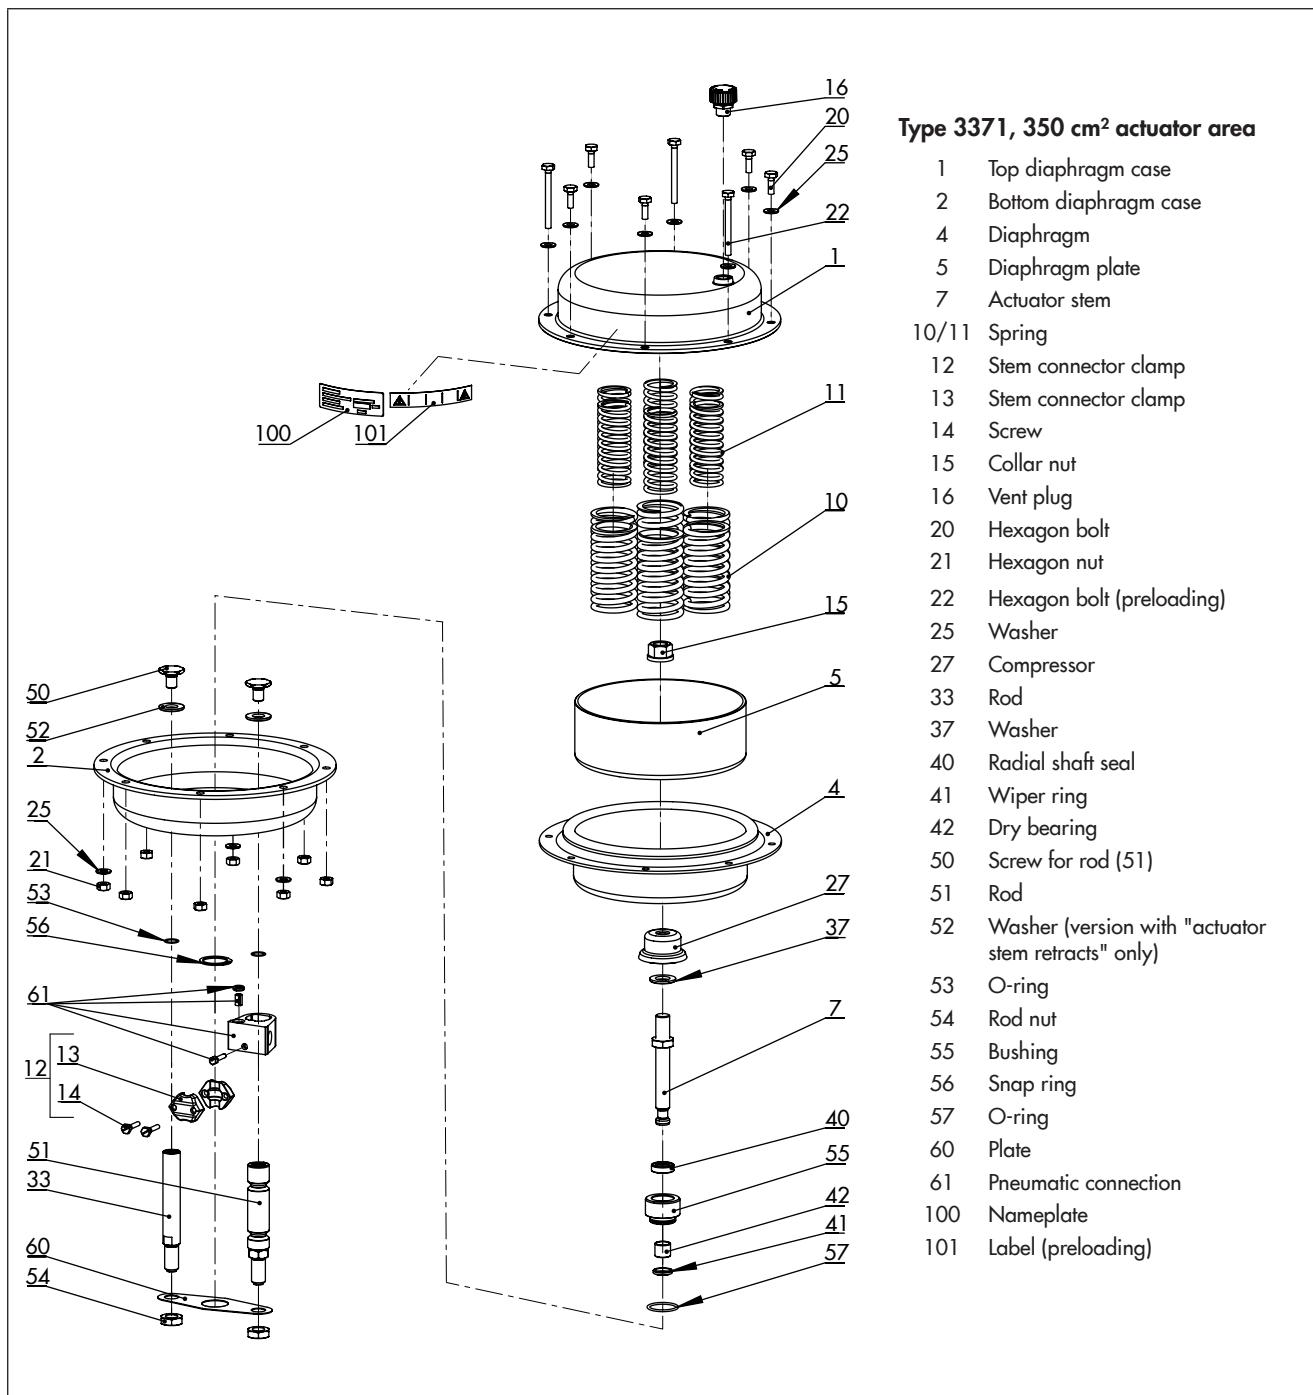

## 2 Tightening torques

### Note concerning the following specifications

- All tightening torques specified in Nm
- Tightening torque tolerance:  $\pm 10\%$
- The tightening torques are based on a friction coefficient of 0.06 with a lubricated seat thread and facing.
- After long operating times or long periods or use at temperatures above 250 °C, the breakaway torque may be twice as high as the tightening torque.

**i Note**

The tightening torques apply to both Type 3371 and Type 3372.

### 2.1 Tightening torques for nuts to connect the top and bottom diaphragm cases

Actuator area in cm <sup>2</sup>	Tightening torque for nuts (21, 23) in Nm
120	7
350	15

### 2.2 Tightening torques for screws on rods

Actuator area in cm <sup>2</sup>	Tightening torque for screw (50) in Nm
120	35
350	70 ( $\pm 10$ )

### 2.3 Tightening torques for collar nut

Actuator area in cm <sup>2</sup>	Tightening torque for collar nut (15) in Nm
120	35
350	160

### 2.4 Tightening torques for stem connector clamps

Actuator area in cm <sup>2</sup>	Tightening torque for stem connector clamps (30/31 for 120 cm <sup>2</sup> ; 12 for 350 cm <sup>2</sup> ) in Nm
120	5
350	9

### 3 Lubricant

#### **⚠ WARNING**

Damage to health after contact with hazardous substances.

Certain lubricants (e.g. 8150-4008) are classified as hazardous substances. These substances have a special label and a material safety data sheet (MSDS) issued by the manufacturer.

- Make sure that an MSDS is available for any hazardous substance used. If necessary, contact the manufacturer to obtain an MSDS.
- Inform operating personnel about the hazardous substances and their correct handling.

#### 3.1 Recommended lubricant

Application	Gasket material and operating medium	Quantity in g	Temperature range in °C	Color	Item no. of lubricant
Mechanical bearings in the actuators (version for water) Valve lubricant	NBR: water	100	-20 to +160	Light brown	8150-4032
Points of support and threaded spindle in actuators	NBR: air	100	-30 to +130	Black	8152-1002
		400			8152-1001
Spring compression	–	250	-180 to +1200	Gray	8150-4008
Screws (stainless steel)	–	–	Up to 200 °C	White	8150-0085

#### 3.2 Lubricant sorted by parts and versions

Application	Actuator stem	Collar nut	Hexagon bolt	Radial shaft seal	Wiper ring	Dry bearing	Screw
Number within drawing (see section 1.5)	7	15	20/22	40	41	42	50
Type 3371	8152-1002 8152-1001	8152-1002 8152-1001	8150-0085	8152-1002 8152-1001	8152-1002 8152-1001	8152-1002 8152-1001	8152-1002 8152-1001
Type 3372	8152-1002 8152-1001	8152-1002 8152-1001	8150-0085	8152-1002 8152-1001	8152-1002 8152-1001	8152-1002 8152-1001	8152-1002 8152-1001

## 4 Tools

### 4.1 Type 3371 and Type 3372, 120 cm<sup>2</sup> actuator area

Actuator area	Tool description	Item no.	Photo
120 cm <sup>2</sup>	Mandrel for wiper	1280-3023	
	Mandrel for radial shaft seal	1280-3061 (1280-3024)	
	Mandrel for dry bearing	1280-3025	
120 cm <sup>2</sup>	Punch	1280-3084	
120 cm <sup>2</sup>	Gripping device for lifting	1280-3094	
120 cm <sup>2</sup>	Travel adjusting gauge	1280-2001	

### 4.2 Type 3371 and Type 3372, 350 cm<sup>2</sup> actuator area

Actuator area	Tool description	Item no.	Photo
350 cm <sup>2</sup>	Mandrel for wiper (41)	1280-3020	
	Mandrel for radial shaft seal (40)	1280-3021	
	Mandrel for dry bearing (42)	1280-3022	
350 cm <sup>2</sup>	O-ring sleeve, for actuators with travel stop on both sides (to protect the O-ring from chafing while being mounted)	1280-3198	
350 cm <sup>2</sup>	Punch	1280-3084	
350 cm <sup>2</sup>	Gripping device for lifting	1280-3072	

Actuator area	Tool description	Item no.	Photo
350 cm <sup>2</sup>	Travel adjusting gauge	1280-2001	

**Special tools**

The following tools are additionally required:

Size/Nm	Tool	Connections		Item no.	Photo
60 to 320 Nm	Torque wrench with scale	14x18 mm		9932-2238	
	Open-end wrench	14x18 mm	Width across flats 32	1280-3186	
	Socket (assembly)	-	Width across flats 13	1280-3108	-




## 1 Information on Type 3275 Valve

### 1.1 Technical data

	Type 3275
Photo	
Actuator areas	314, 490, and 804 cm <sup>2</sup>
Travel	15 or 30 mm
Associated product documentation	Data sheet <a href="#">► T 8314</a> Mounting and operating instructions <a href="#">► EB 8314</a>

### 1.2 Parts

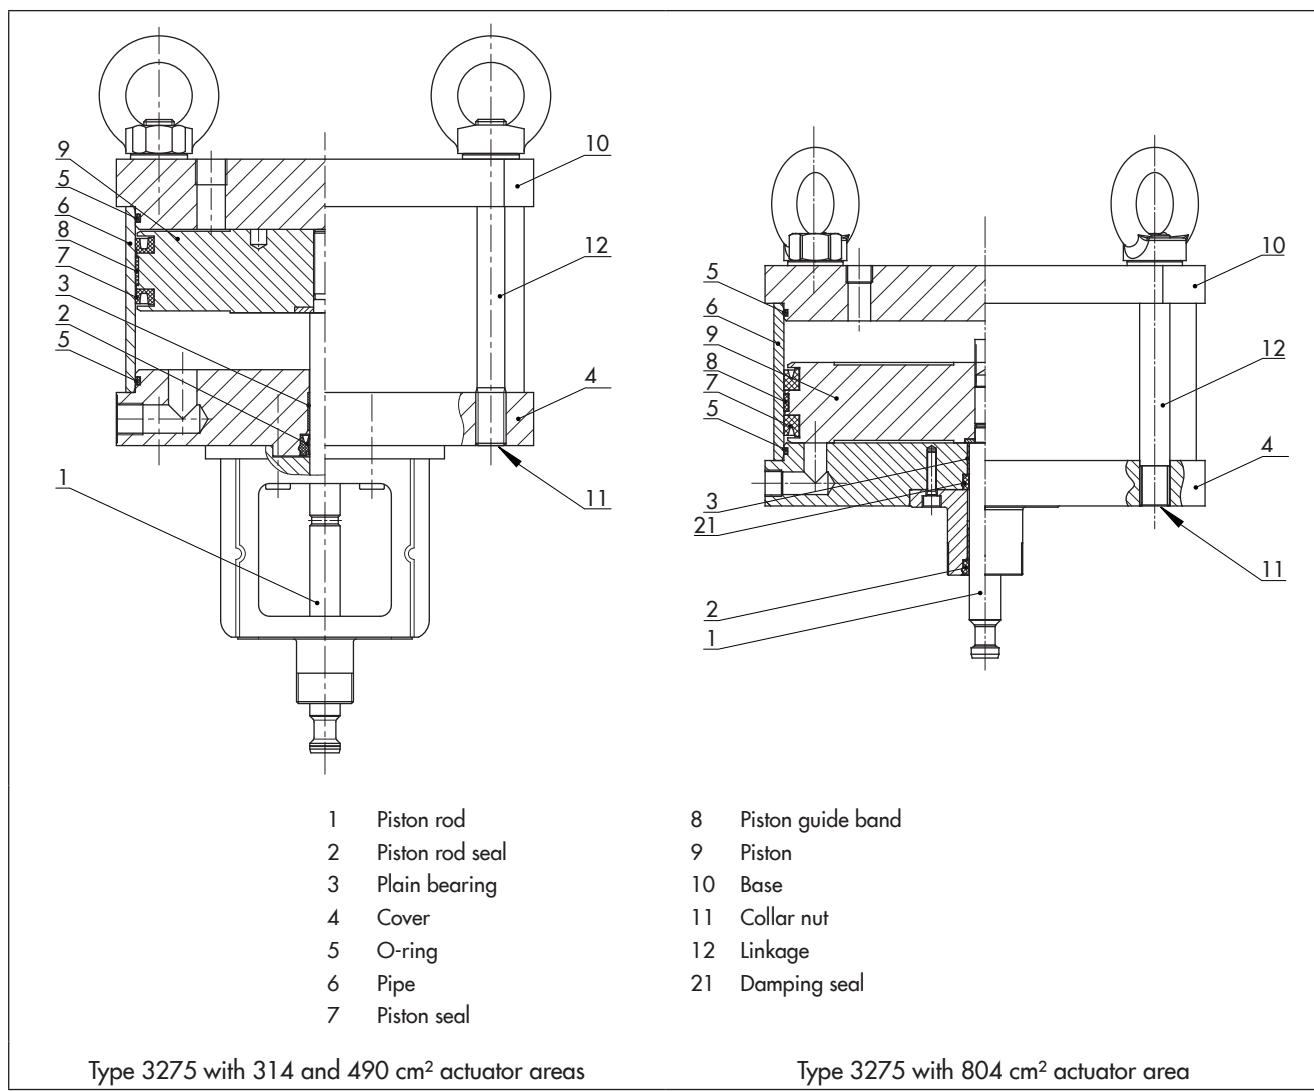

## 2 Tightening torques

### 2.1 Tightening torques for tie rods

Cylinder diameter in mm	Tightening torque for tie rod (12) in Nm
32	7.0 to 9.5
40	7.0 to 9.5
50	13.6 to 18.4
63	13.6 to 18.4
80	21 to 28
100	21 to 28
125	40 to 54
160	106 to 143
200	106 to 143
250	187 to 253
320	298 to 403

### 2.2 Tightening torques for collar nuts

Cylinder diameter in mm	Tightening torque for collar nut (11) in Nm
32	13.6 to 18.4
40	13.6 to 18.4
50	13.6 to 18.4
63	13.6 to 18.4
80	32 to 40
100	32 to 40

## 3 Lubricants

### Note

The lubricant to be used is included with the set of parts subject to wear.

Do not use any other lubricants.

If necessary, contact SAMSON's After-sales Service department.

### Parts to be lubricated

- Spaces where the seals are to be installed
- Seals: piston rod seal (2), O-ring (5), damping seal (21), piston seal (7), piston guide band (8)
- Face of the cylinder barrel (6)
- Face of the piston rod (1)
- Grease chambers at the piston seal (7)
- Grease chambers at the piston rod seal (2)

## 4 Tools

No special tools are required to assemble or disassemble the Type 3275 Pneumatic Piston Actuator.

## 1 Information on Type 3571 Valve

### 1.1 Technical data

	Type 3571				
Photo	 A 3D rendering of the Type 3571 actuator. It is a cylindrical device with a copper-colored top cap featuring a digital display and several mounting holes. A blue rod extends from the bottom.				
Actuator area	<table><tr><td>in<sup>2</sup></td><td>27, 54, 116</td></tr><tr><td>cm<sup>2</sup></td><td>175, 350, 750</td></tr></table>	in <sup>2</sup>	27, 54, 116	cm <sup>2</sup>	175, 350, 750
in <sup>2</sup>	27, 54, 116				
cm <sup>2</sup>	175, 350, 750				
Associated product documentation	<table><tr><td>Data sheet</td><td>► T 8820</td></tr><tr><td>Mounting and operating instructions</td><td>► EB 8820</td></tr></table>	Data sheet	► T 8820	Mounting and operating instructions	► EB 8820
Data sheet	► T 8820				
Mounting and operating instructions	► EB 8820				

**i Note**

The Type 3571 Actuator is only sold through SAMSON USA.

### 1.2 Note on actuators with preloaded springs

**⚠ WARNING**


Risk of personal injury due to preloaded springs.

Valves in combination with pneumatic actuators with preloaded springs are under tension. These control valves with SAMSON pneumatic actuators can be identified by the long bolts protruding from the bottom of the actuator. These actuators are labeled correspondingly.

Before starting any work on the actuator, relieve the compression from the preloaded springs (see associated actuator documentation).


### 1.3 Parts

- Exploded diagram of actuator with 27 and 116 in<sup>2</sup> (175 and 750 cm<sup>2</sup>) actuator area, see page 106
- Exploded diagram of actuator with 54 in<sup>2</sup> (350 cm<sup>2</sup>) actuator area, see page 107

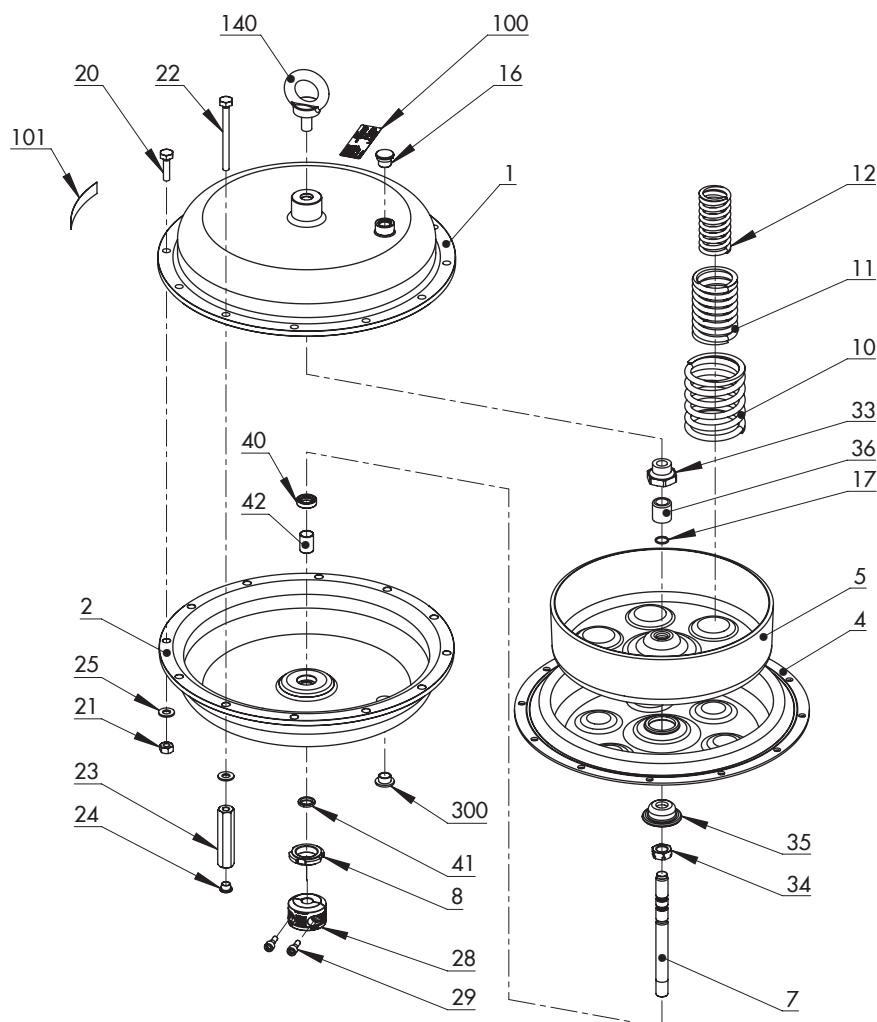

27 and 116 in<sup>2</sup> (175 and 750 cm<sup>2</sup>) actuator areas

- |    |                           |                                                                     |                              |
|----|---------------------------|---------------------------------------------------------------------|------------------------------|
| 1  | Top diaphragm case        | 25                                                                  | Washer                       |
| 2  | Bottom diaphragm case     | 28                                                                  | Stem connector clamp         |
| 4  | Diaphragm                 | 29                                                                  | Hexagon screw                |
| 5  | Diaphragm plate           | 33                                                                  | Nut                          |
| 7  | Actuator stem             | 34                                                                  | Slotted nut <sup>1)</sup>    |
| 8  | Ring nut                  | 35                                                                  | Compressor                   |
| 10 | Spring (external)         | 36                                                                  | Distance pipe                |
| 11 | Spring (internal)         | 40                                                                  | Radial shaft seal            |
| 12 | Spring (internal)         | 41                                                                  | Wiper ring                   |
| 16 | Vent plug                 | 42                                                                  | Dry bearing                  |
| 17 | O-ring                    | 100                                                                 | Nameplate                    |
| 20 | Hexagon screw             | 101                                                                 | Label (preloading)           |
| 21 | Hexagon nut               | 140                                                                 | Lifting eyelet <sup>1)</sup> |
| 22 | Hexagon bolt (preloading) | 300                                                                 | Stopper                      |
| 23 | Hexagon nut (preloading)  | 1) Only for 116 in <sup>2</sup> /750 cm <sup>2</sup> actuator areas |                              |
| 24 | Stopper                   |                                                                     |                              |

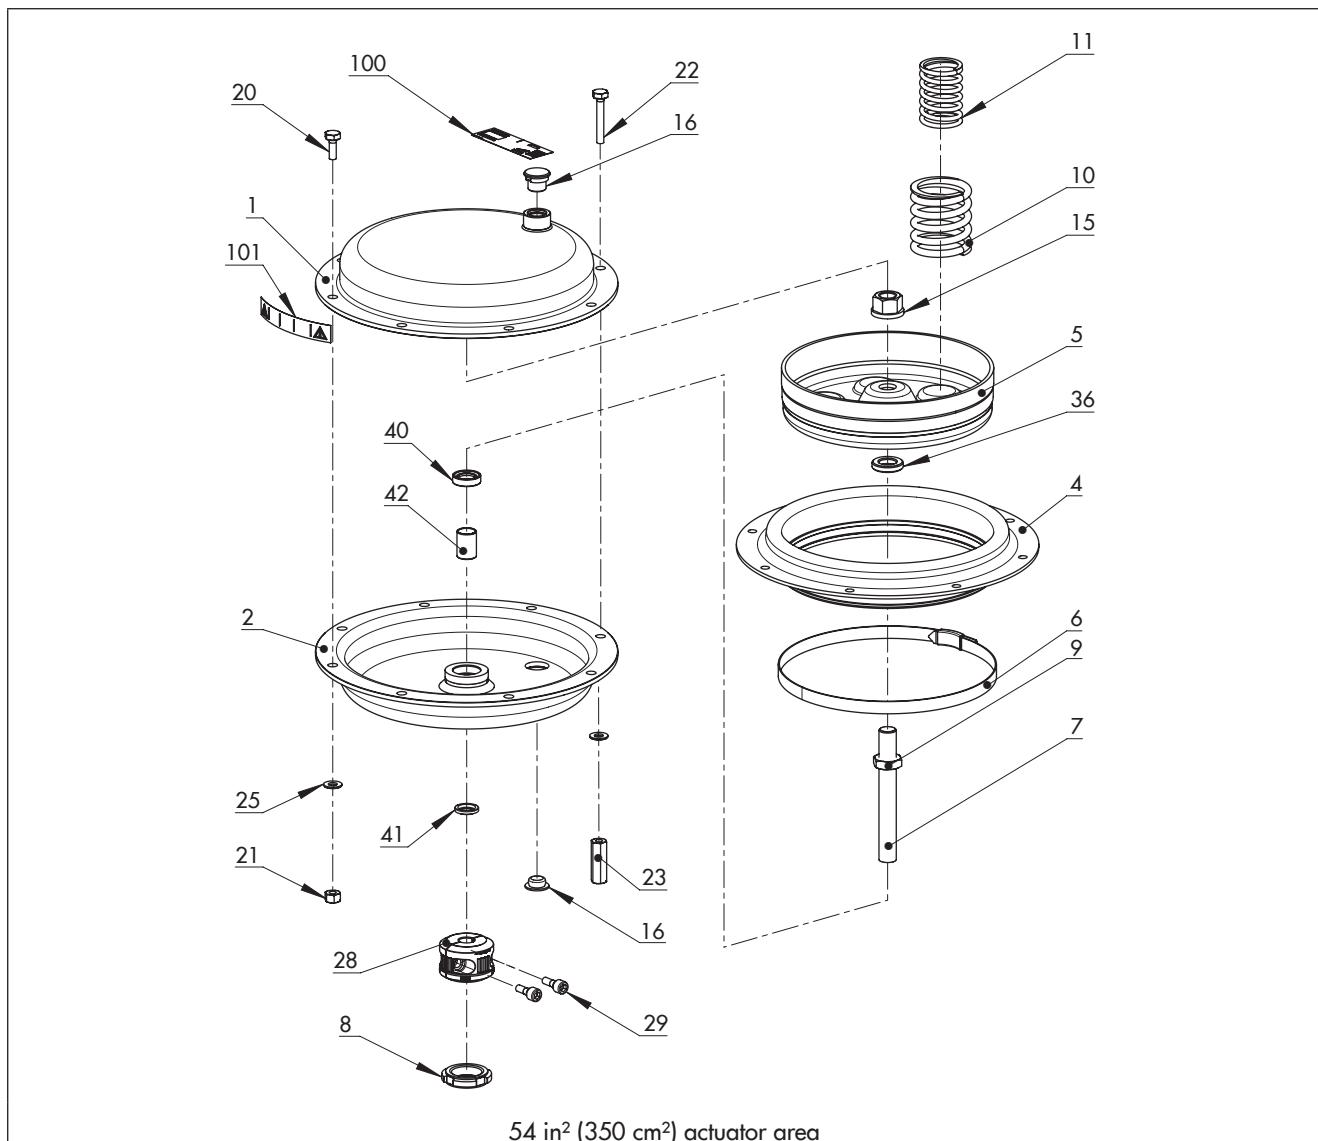

- |    |                                      |     |                      |
|----|--------------------------------------|-----|----------------------|
| 1  | Top diaphragm case                   | 28  | Stem connector clamp |
| 2  | Bottom diaphragm case                | 29  | Hexagon screw        |
| 4  | Diaphragm                            | 36  | Distance pipe        |
| 5  | Diaphragm plate                      | 40  | Radial shaft seal    |
| 6  | Adjustable clamp with compressor     | 41  | Wiper ring           |
| 7  | Actuator stem                        | 42  | Dry bearing          |
| 8  | Ring nut                             | 100 | Nameplate            |
| 9  | Nut (glued to the actuator stem (7)) | 101 | Label (preloading)   |
| 10 | Spring (external)                    |     |                      |
| 11 | Spring (internal)                    |     |                      |
| 16 | Vent plug                            |     |                      |
| 20 | Hexagon screw                        |     |                      |
| 21 | Hexagon nut                          |     |                      |
| 22 | Hexagon bolt (preloading)            |     |                      |
| 23 | Hexagon nut (preloading)             |     |                      |
| 25 | Washer                               |     |                      |

## 2 Tightening torques

See section 1.3 for position numbers

### 2.1 Tightening torques for nuts to connect the top and bottom diaphragm cases

Actuator area		Tightening torque for nuts (21 and 23) in Nm
in <sup>2</sup>	cm <sup>2</sup>	
27	175	12 to 15
54	350	15
116	750	25

### 2.2 Tightening torques for ring nut

Actuator area		Tightening torque for ring nut (8) in Nm
in <sup>2</sup>	cm <sup>2</sup>	
27	175	150
54	350	150
116	750	150

#### Special tools

The following tools are additionally required to tighten the ring nut (8):

Nm	Connections	Tool	Item no.	Photo
60 to 320	14x18 mm	□	9932-2238	
150	-	-	1280-3118	

### 2.3 Tightening torques for collar nut

Actuator area		Tightening torque for collar nut (15) in Nm
in <sup>2</sup>	cm <sup>2</sup>	
27	175	-
54	350	160
116	750	-

### 2.4 Tightening torques for nut on compressor

Actuator area		Tightening torque for nuts (33) on compressor (35) in Nm
in <sup>2</sup>	cm <sup>2</sup>	
27	175	25
54	350	-
116	750	75

## 2.5 Tightening torques for adjustable clamp

Actuator area		Tightening torque for adjustable clamp (6) in Nm
in <sup>2</sup>	cm <sup>2</sup>	
27	175	–
54	350	6
116	750	–

**! NOTICE**

Risk of property damage and malfunction due to incorrect mounting of the adjustable clamp.  
The clamp lock must be fastened between the two fastening bolts on the top and bottom diaphragm case.

**i Note**

After performing any repair or maintenance work on the actuator, renew the adjustable clamp.

### Special tools

The following tools are additionally required to tighten the adjustable clamp (6):

Size/Nm	Tool	Connections		Item no.	Photo
2 to 10 Nm	Torque wrench with scale	1/4"		9932-3811	
	1/4" extension			9932-3228	
	1/4" socket			9932-3302	

## 2.6 Tightening torques for stem connector clamps

Type 3525 Valve	Valve size	Tightening torque for screw (29) on stem connector clamps (28) in Nm
Standard	NPS 1 to 3	15
Compact	NPS 1	5

### 3 Lubricant

#### **⚠ WARNING**

Damage to health after contact with hazardous substances.

Certain lubricants (e.g. Gleitmo® 1763 V) are classified as hazardous substances. These substances have a special label and a material safety data sheet (MSDS) issued by the manufacturer.

- Make sure that an MSDS is available for any hazardous substance used. If necessary, contact the manufacturer to obtain an MSDS.
- Inform operating personnel about the hazardous substances and their correct handling.

#### 3.1 Recommended lubricant

Application	Gasket material and operating medium	Quantity in g	Temperature range in °C	Color	Item no.
Points of support and threaded spindle in actuators	NBR: air	400	-30 to +130	Black	8152-1001
Valves for oxygen service (free of oil and grease)	EPDM/PVMO: air EPDM: oxygen	60	-60 to +250	White	8150-0116

#### 3.2 Lubricant sorted by parts and versions

Application	Radial shaft seal	Wiper ring	Dry bearing
Number within drawing (see section 1.3)	40	41	42
Type 3571	8152-1001/8150-0116	8152-1001/8150-0116	8152-1001/8150-0116

## 4 Tools

### 4.1 Type 3571, 27 in<sup>2</sup> or 175 cm<sup>2</sup> actuator area

Actuator area in <sup>2</sup>	cm <sup>2</sup>	Tool description	Item no.	Photo
27	175	Mandrel for wiper (41)	1280-3023	
		Mandrel for radial shaft seal (40)	1280-3061	
		Mandrel for dry bearing (42)	1280-3025	
		Punch	1280-3084	

### 4.2 Type 3571, 54 in<sup>2</sup> or 350 cm<sup>2</sup> actuator area

Actuator area in <sup>2</sup>	cm <sup>2</sup>	Tool description	Item no.	Photo
54	350	Mandrel for wiper (41)	1280-3020	
		Mandrel for radial shaft seal (40)	1280-3063	
		Mandrel for dry bearing (42)	1280-3022	
		Punch	1280-3084	

### 4.3 Type 3571, 116 in<sup>2</sup> or 750 cm<sup>2</sup> actuator area

Actuator area in <sup>2</sup>		Tool description	Item no.	Photo
116	750	Mandrel for wiper (41)	1280-3020	
		Mandrel for radial shaft seal (40)	1280-3063	
		Mandrel for dry bearing (42)	1280-3022	
		Punch	1280-3084	
		Wrench for slotted nut	1280-3197	
		O-ring sleeve (to protect the O-ring from chafing while being mounted)	1280-3198	





SAMSON AG · MESS- UND REGELTECHNIK  
Weismüllerstraße 3 · 60314 Frankfurt am Main, Germany  
Phone: +49 69 4009-0 · Fax: +49 69 4009-1507  
[samson@samson.de](mailto:samson@samson.de) · [www.samson.de](http://www.samson.de)

**AB 0100 EN**